



## SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER

Reverse Voltage - 50 to 1000 V

Forward Current - 2 A

### FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- High efficiency
- Lead free in comply with EU RoHS 2011/65/EU directives

### MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg 0.00095oz

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View

Marking Code: US2A~US2M  
Simplified outline SMAF and symbol

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	US2AF	US2BF	US2DF	US2GF	US2JF	US2KF	US2MF	Units					
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V					
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V					
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V					
Maximum Average Forward Rectified Current at T <sub>c</sub> = 125 °C	I <sub>F(AV)</sub>	2							A					
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I <sub>FSM</sub>	50							A					
Maximum Instantaneous Forward Voltage at 2 A	V <sub>F</sub>	1.0		1.3		1.65		V						
Maximum DC Reverse Current T <sub>a</sub> = 25 °C at Rated DC Blocking Voltage T <sub>a</sub> = 125 °C	I <sub>R</sub>	5 100							µA					
Maximum Reverse Recovery Time <sup>(1)</sup>	t <sub>rr</sub>	50			75			ns						
Typical Thermal Resistance <sup>(2)</sup>	R <sub>θJA</sub> R <sub>θJC</sub>	65 20							°C/W					
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-55 ~ +150							°C					

( 1 ) Measured with I<sub>F</sub> = 0.5 A, I<sub>R</sub> = 1 A, I<sub>rr</sub> = 0.25 A.

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



Fig.1 Forward Current Derating Curve

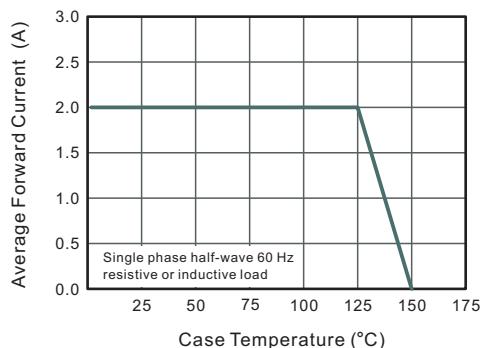


Fig.2 Typical Reverse Characteristics

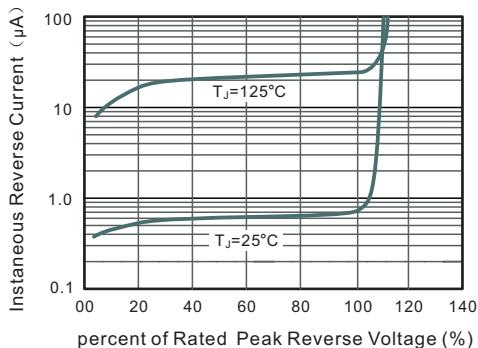


Fig.3 Typical Forward Characteristics


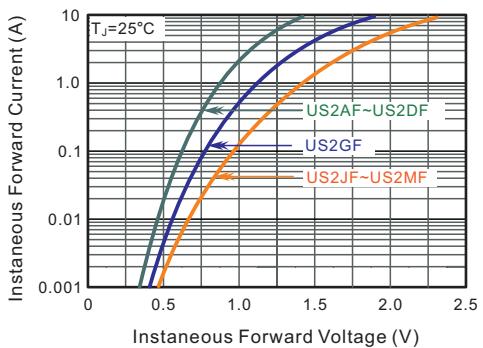


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current




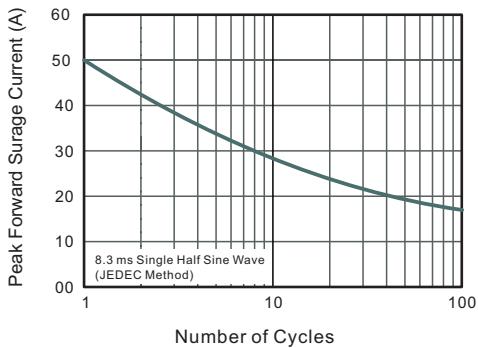


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMAF

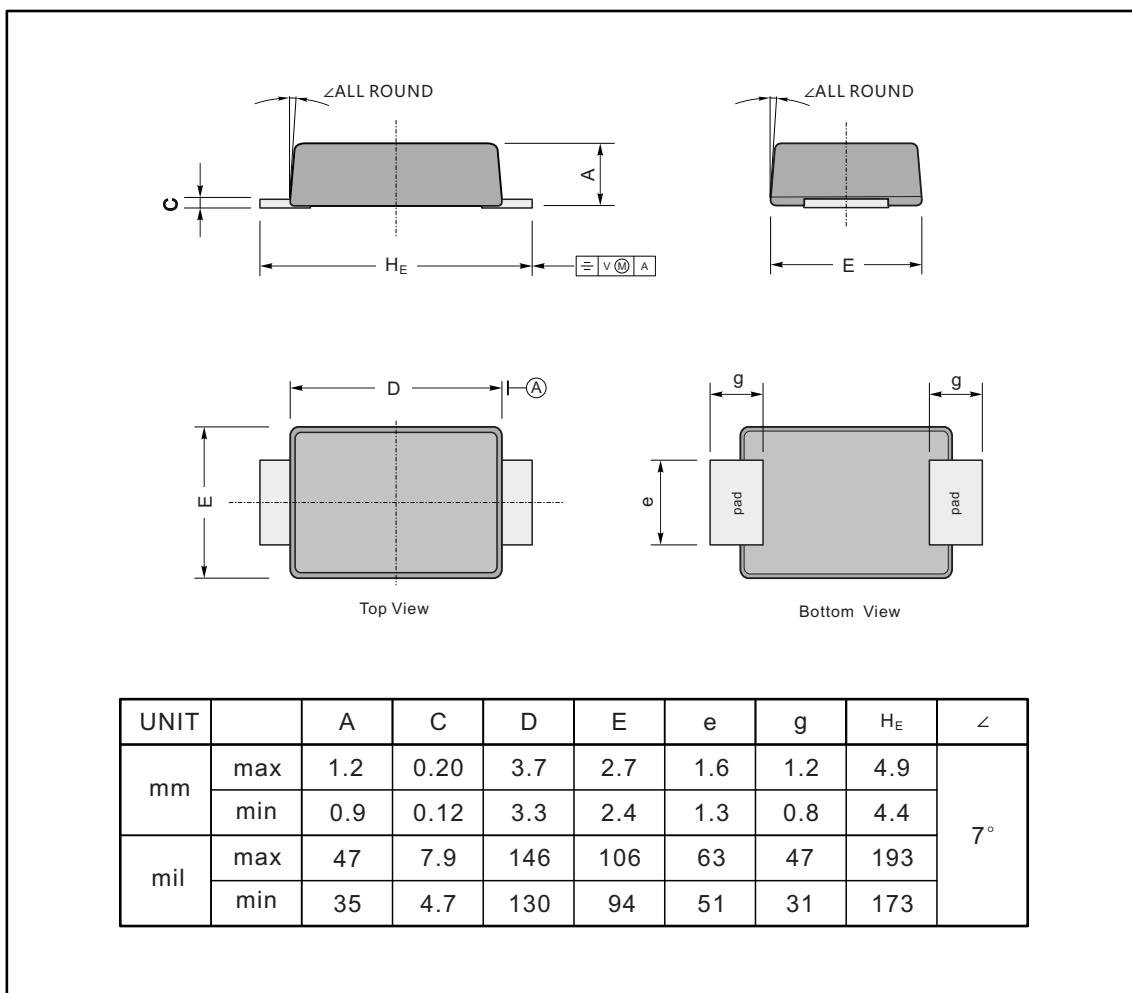

The recommended mounting pad size

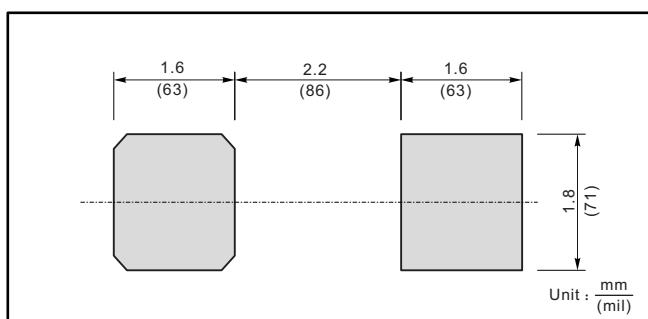

Marking

Type number	Marking code
US2AF	US2A
US2BF	US2B
US2DF	US2D
US2GF	US2G
US2JF	US2J
US2KF	US2K
US2MF	US2M

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Rectifiers category:***

***Click to view products by Jingdao manufacturer:***

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [DLA11C-TR-E](#) [DSA17G](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#)  
[481235F](#) [RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#)  
[CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#)  
[40HFR60](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [VS-12FL100S10](#) [ACGRA4001-HF](#) [ACURA107-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#)