



1. Description

The KIA3401 uses advanced trench technology to provide excellent $R_{DS(on)}$, low gate charge and operation with gate voltages as low as 2.5V. This device is suitable for use as a load switch or in PWM applications. Standard Product KIA3401 is Pb-free (meets ROHS & Sony 259 specifications). KIA3401 is a Green Product ordering option.

2. Features

- n $V_{DS}(V) = -30V$
- n $I_D = -4.0A$
- n $R_{DS(on)} < 60m\Omega (V_{GS} = -10V, I_D = -4.0A)$
- n $R_{DS(on)} < 70m\Omega (V_{GS} = -4.5V, I_D = -3.0A)$
- n $R_{DS(on)} < 100m\Omega (V_{GS} = -2.5V, I_D = -1.2A)$

3. Symbol

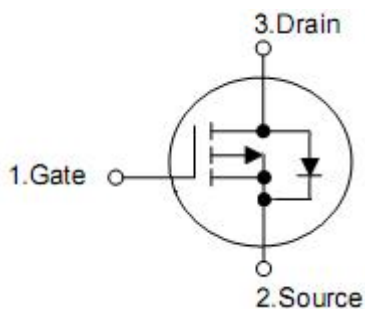

Pin	Function
1	Gate
2	Source
3	Drain

4. Absolute maximum ratings

(T_A=25°C, unless otherwise noted)

Parameter	Symbol	Rating	Units
Drain-source voltage	V _{DS}	-30	V
Gate-source voltage	V _{GS}	±12	V
Continuous drain current ^A	I _D	T _A =25°C	-4.0
		T _A =70°C	-3.5
Pulsed drain current ^B	I _{DM}	-30	A
Total power dissipation ^A	P _D	T _A =25 °C	1.4
		T _A =70°C	1
Junction and storage temperature range	T _J , T _{STG}	-55 to150	°C

5. Thermal characteristics

Parameter	Symbol	Typ	Max	Unit
Maximum junction-ambient ^A (t≤10s)	R _{θJA}	65	90	°C/W
Maximum junction-ambient ^A	R _{θJA}	85	125	°C/W
Maximum junction-Lead ^C	R _{θJL}	43	60	°C/W

6. Electrical characteristics

($T_A=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Drain-source breakdown voltage	BV_{DSS}	$V_{GS}=0V, I_D=-250\mu A$	-30	-	-	V
Zero gate voltage drain current	I_{DSS}	$V_{DS}=-24V, V_{GS}=0V$	-	-	-1	μA
Gate- body leakage current	I_{GSS}	$V_{GS}=\pm 12V, V_{DS}=0V$	-	-	± 100	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-0.7	-1	-1.3	V
On state drain current	$I_{D(on)}$	$V_{GS}=-4.5V, V_{DS}=-5V$	-25	-	-	A
Static drain-source on-resistance	$R_{DS(on)}$	$V_{GS}=-10V, I_D=-4.0A$	-	50	60	m Ω
		$V_{GS}=-4.5V, I_D=-3.0A$	-	60	70	
		$V_{GS}=-2.5V, I_D=-1.2A$	-	85	100	
Forward transconductance	g_{fs}	$V_{DS}=-5.0V, I_D=-5.0A$	7	11	-	S
Diode forward voltage	V_{SD}	$V_{GS}=0V, I_S=-1A$	-	-	-1.2	V
Maximum body-diode continuous current	I_S		-	-	-2.2	A
Input capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V,$ $f=1MHz$	-	954	-	pF
Output capacitance	C_{oss}		-	115	-	
Reverse transfer capacitance	C_{rss}		-	77	-	
Gate resistance	R_g	$V_{DS}=0V,$ $V_{GS}=0V, f=1MHz$	-	6	-	Ω
Total gate charge	Q_g	$V_{DS}=-15V, V_{GS}=-4.5V$ $I_D=-4.0A$	-	9.4	-	nC
Gate-source charge	Q_{gs}		-	2.0	-	
Gate-drain charge	Q_{gd}		-	3.0	-	
Turn-on delay time	$t_{d(on)}$	$V_{DS}=-15V, R_L=3.6\Omega,$ $R_G=6\Omega, V_{GS}=-10V$	-	6.3	-	ns
Rise time	t_r		-	3.2	-	
Turn-off delay time	$t_{d(off)}$		-	38.2	-	
Fall time	t_f		-	12	-	
Reverse recovery time	t_{rr}	$I_F=-4A, di/dt=100A/\mu s,$	-	20.2	-	nS
Reverse recovery charge	Q_{rr}		-	11.2	-	nC

Note:A.The value of $R_{\theta JA}$ is measured with the device mounted on 1 in² FR-4 board with 2oz.Copper,in a still air environment with $T_A=25^\circ\text{C}$.The value in any given application depends on the user's specific board design.The current rating is based on the $t \leq 10s$ thermal resistance rating.

B.Repetitive rating,pulse width limited by junction temperature.

C.The $R_{\theta JA}$ the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.

D.The static characteristics in Figures 1 to 6,12,14 are obtained using 80 μs pulses,duty cycle 0.5% max.

E.These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper,in a still air environment with $T_A=25^\circ\text{C}$.The SOA curve provides a single pulse rating.

7. Test circuits and waveforms

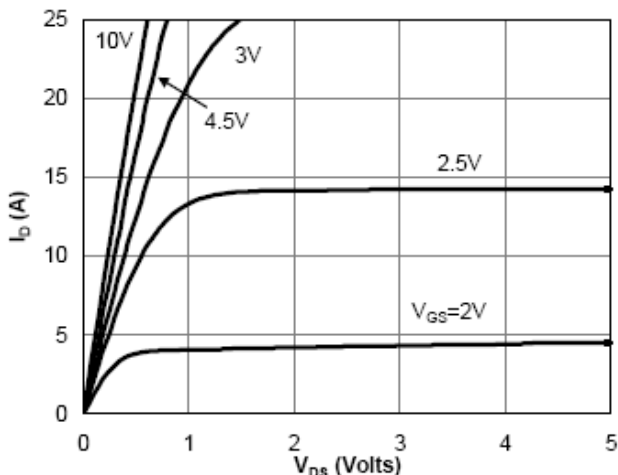


Fig 1: On-Region Characteristics

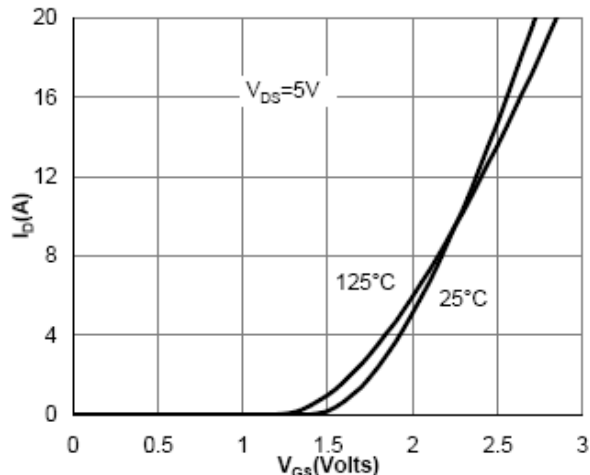


Figure 2: Transfer Characteristics

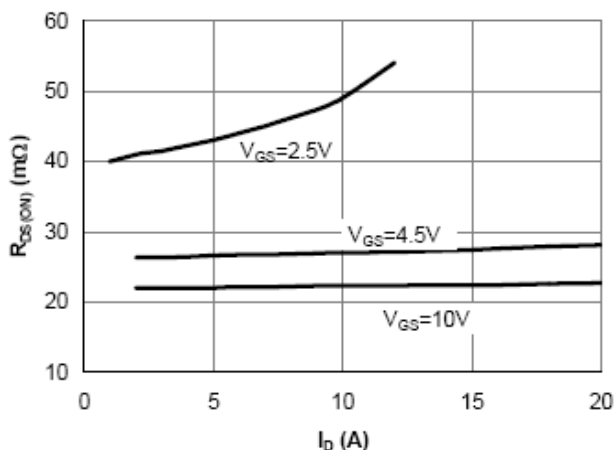


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

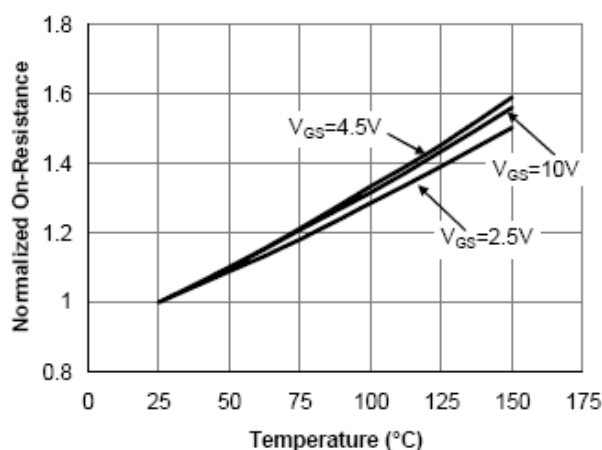


Figure 4: On-Resistance vs. Junction Temperature

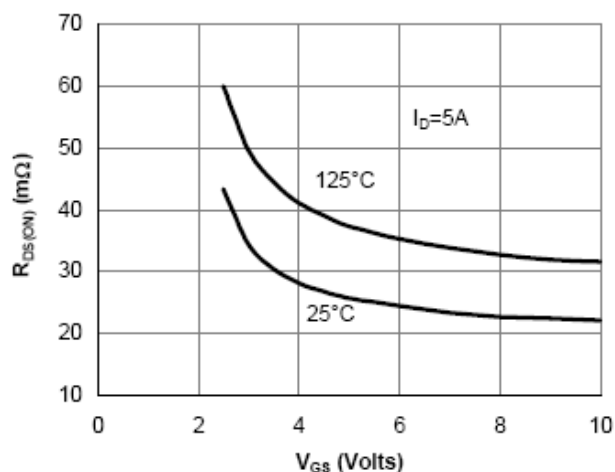


Figure 5: On-Resistance vs. Gate-Source Voltage

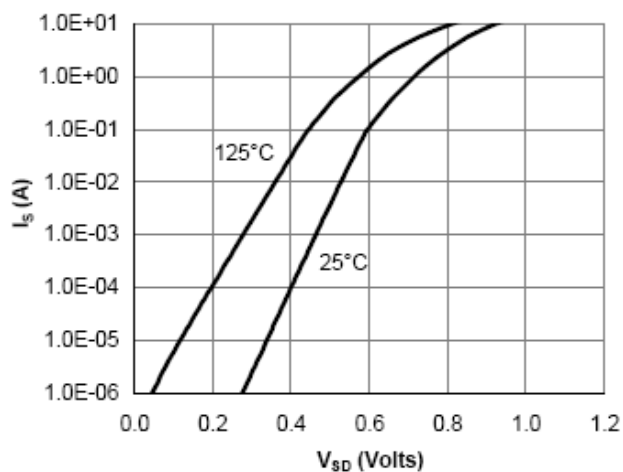


Figure 6: Body-Diode Characteristics

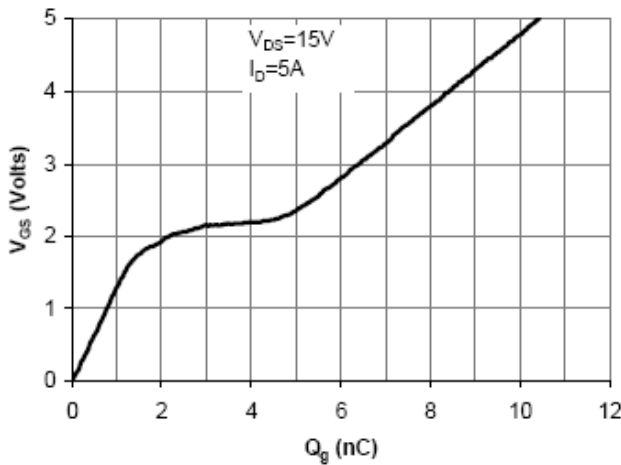


Figure 7: Gate-Charge Characteristics

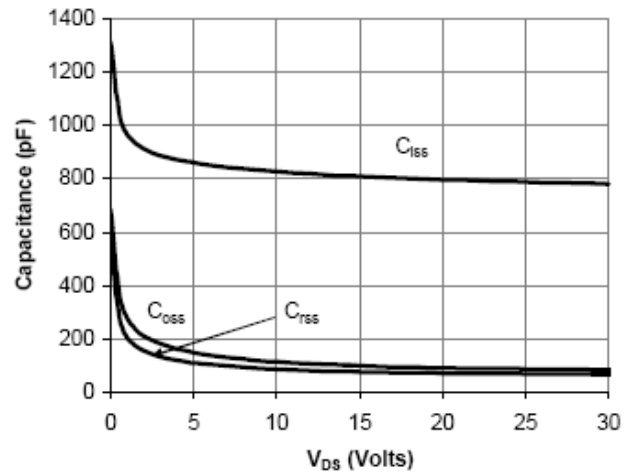


Figure 8: Capacitance Characteristics

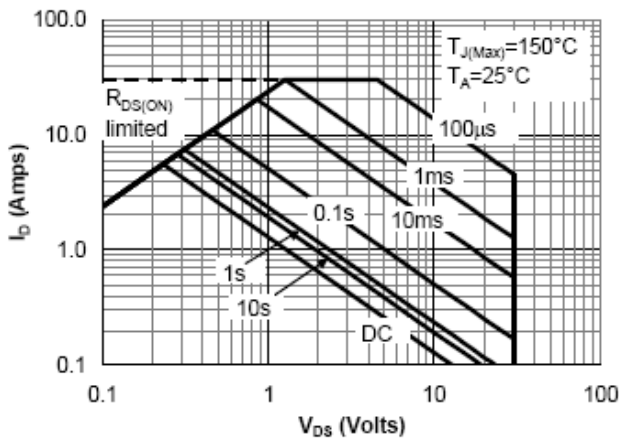


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

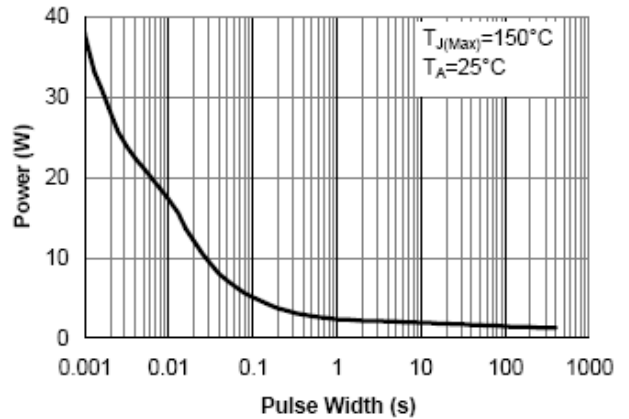


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

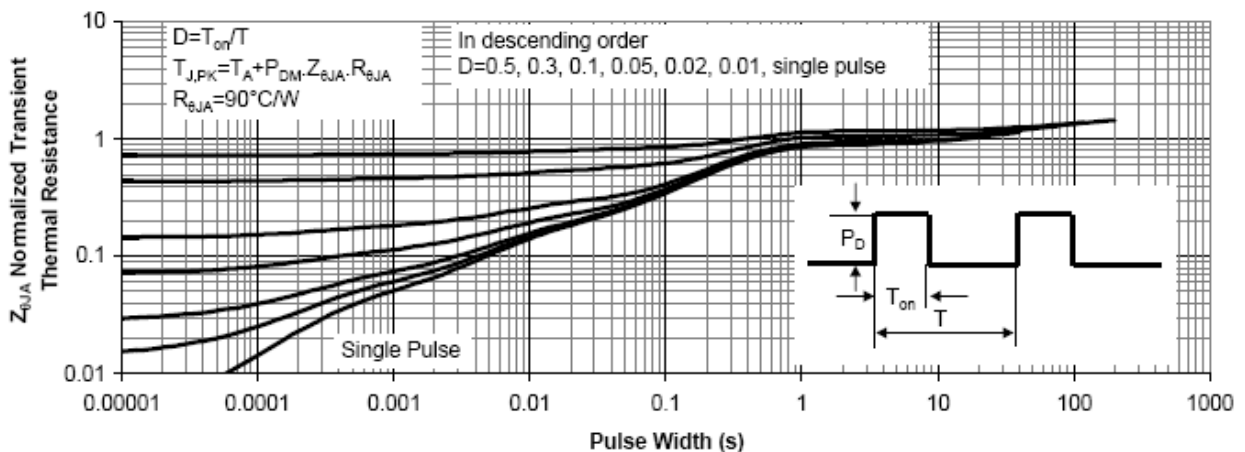


Figure 11: Normalized Maximum Transient Thermal Impedance

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [KIA](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [FDPF9N50NZ](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#)
[IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IPS60R1K0PFD7SAKMA1](#) [IPS60R360PFD7SAKMA1](#)
[IPS60R600PFD7SAKMA1](#) [IPS60R210PFD7SAKMA1](#) [DMN2990UFB-7B](#)