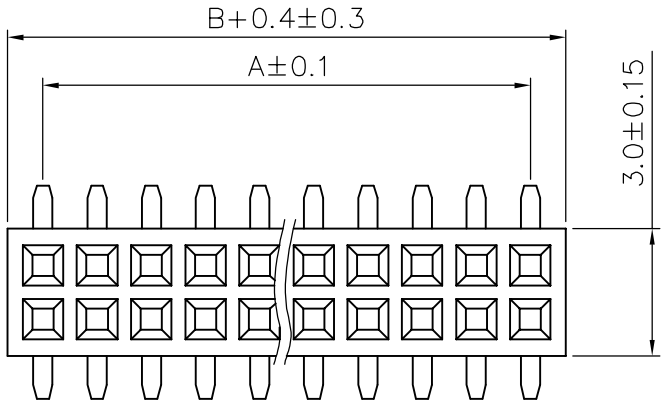

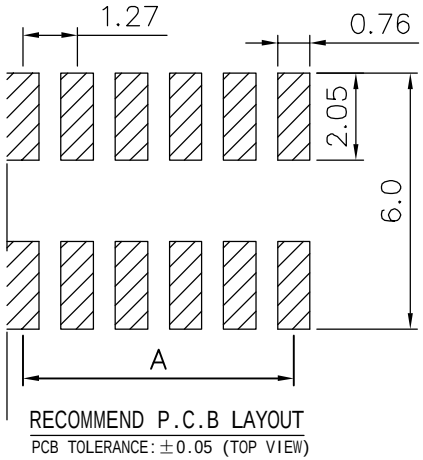

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS

Current Rating: 1.0 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: -40° to+105°
Insrlator Material: Polyester(UL94V-0)
Contact Material: Phosphor bronze
Standard: PA6T
Contact Plating: Gold Flash
Max.Processing Temp: 240° C for30-60seconds
(260° C for5seconds)

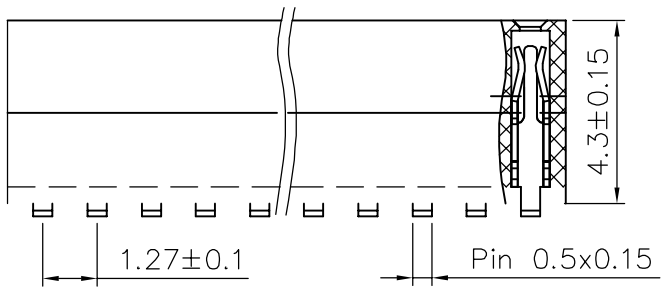



(1) Pin Spacing：127=1.27mm
(2) Product Name：FH=Female Header
(3) No.of Rows:1=Single Row ;2=Dual Row
(4) No.of Pins Per Row:1～50
(5) Insulator Material Height:20=2.0mm;43=4.3mm
(6) Connector Type:S=Straight;R=Right; Angle M=SMT
(7) Connector Material Length: 24=2.4mm; 30=3.0mm
(8) Insulator Material Width: 18=1.8mm 21=2.1mm
(9) Contact Plating: GO=Gold Flash; AU10=Au 1.0u"
(10) Insulator Material Option:
A=BK-PA6T;B=BK-PA46;C=KB-LCP;S=Special

深圳市金航标电子有限公司	WWW.BDS666.COM
KH-1.27FH-2X8P-H4.3-SMT	0755-83044319

UNLESS OTHEWIXE SPECIFIED TOLERANCE
X :±0.3 X° :±5°
X.X :±0.2 X.X° :±1°
X.XX:±0.1 X.XX° :±0.5°

DRAWM NAME 1.27FH 2xnPin H4.3 SMT

SIZE	A4	SCALE	N:1	PROUCT NO.	
REV	A	UNIT	mm	PROJECT	PAGE 1/1

DRAW:	LI BEI LIN 12/03/07	CHECKED:	/ /	APPROVED:	/ /

No.of	DIM.A	DIM.B	No.of	DIM.A	DIM.B	No.of	DIM.A	DIM.B	No.of	DIM.A	DIM.B	No.of	DIM.A	DIM.B
1	——	——	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37	41	50.80	52.07
2	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64	42	52.07	53.34
3	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91	43	53.34	54.61
4	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18	44	54.61	55.88
5	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45	45	55.88	57.15
6	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72	46	57.15	58.42
7	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99	47	58.42	59.69
8	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26	48	59.69	60.96
9	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53	49	60.96	62.23
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80	50	62.23	63.50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings ***category:***

Click to view products by Kinghelm ***manufacturer:***

Other Similar products are found below :

57102-F02-18ULF 58102-G61-06LF 582553-1 009176003701906 01.001.5753.1 0050291907 02.125.8002.8 609-3404 61062-3 CSU011177004 622-0430 622-3653LF 63453-116 636-1030 636-1427 636-3427 636-4007 641938-9 65495-038 65692-001LF 65781-018 65781-047 65817-010LF 65817-015LF 66207-023LF 67095-007LF 67601157 68631-112 68645-018 699319-000 M90C108951C 70.362.1628.0 70-4210 70-4226B 70-4853B 707-5028 71.350.2428.0 71961-016LF 733-134 733-162 754199-000 760-3052 80.063.4001.1 800-90-001-10-001000 800-90-010-10-002000 801-43-002-10-013000 801-43-006-10-002000 803-41-018-10-001000 803-43-024-10-001000 803-93-012-10-001000