

REV	DESCRIPTION	DATE	APPROVED
A/0	新版发行	2020.06.06	xiao

备注:

1. 材质:

1.1 胶芯: LCP+30%G.F UL94V-0

1.2 端子: 高导铜, T=0.15mm; 半金亮锡 1 μ "

1.3 外壳: SUS304, T=0.30mm; 镀镍 80 μ " MIN.

1.4 钢片: SUS301, T=0.15mm;

2. 主要特性:

2.1 额定电流: 5.0A

2.2 接触阻抗: 40MILLTOHMS MAX

2.3 绝缘阻抗: 150V DC/100 MEGA OHMS MIN

2.4 耐压测试: 100V AC/ 1MA MAX








2.5 沾锡性: 温度 250±5℃, 时间 5±0.5s

2.6 插入力: 5~20N 2. 拨出力: 8~20N

使用寿命: 10000次、拨出力 5N MIN

2.7 盐雾测试: 通过24H盐水盐雾无生锈现象

2.8 工作温度: -30℃~+80℃

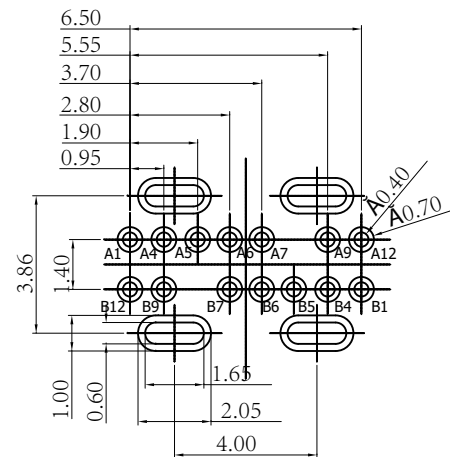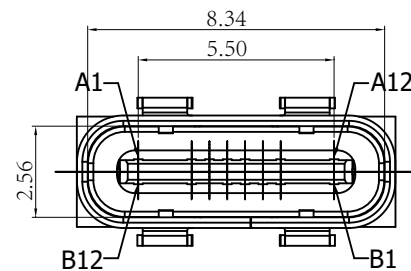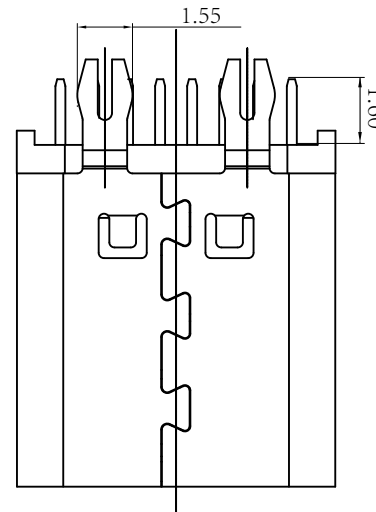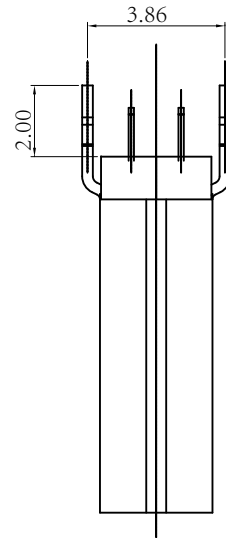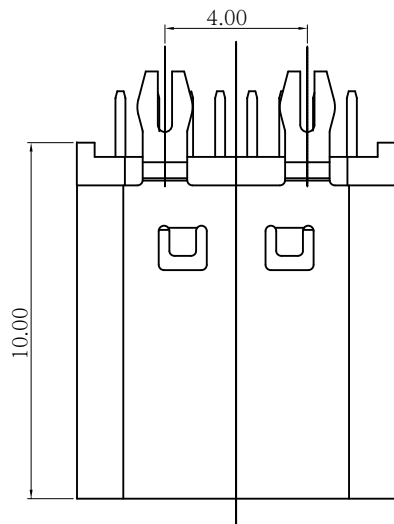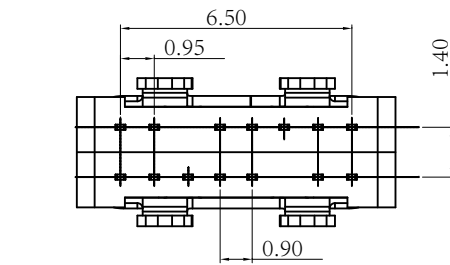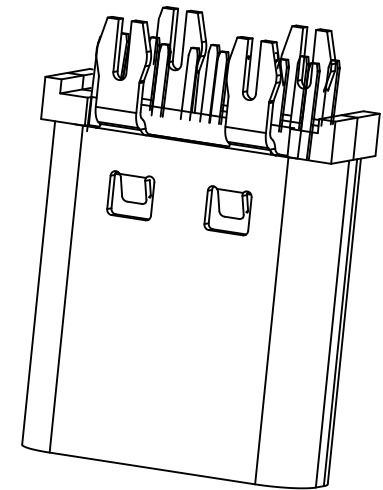

TOLERANCES		深圳市金航标电子有限公司		www.kinghelm.com.cn	
.X	±0.30	KH-TYPE-C-L10-14P-2.0		0755-28190160	
.XX	±0.20				
.XXX	±0.10	APPROVED: TZ120 TITLE: TYPE-C 14P 180度立插 L=10.0			
ANGLES	±2.00°	CHECKED: TZ101 PART NO.:		PROJECTION:	
DRAWING: TZ125		REV.:	A/0	SIZE: A4	UNIT: M M
				SCALE: 1:1	SHEET: 1/1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [Kinghelm](#) manufacturer:*

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [1734082-1](#) [30-470](#) [30-489](#) [30-541](#) [MAB 5 S](#) [A-USB A-2P-C](#) [MIKROE-1451](#)  
[USBFTVSCCG](#) [1-1734084-2](#) [MUSBA81130](#) [NK-27-32SL](#) [NK-L8-22C-5/8](#) [10135326-001LF](#) [4198](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#)  
[17-200011](#) [UB-20AFMM-LL7A01](#) [CAP-WCCMLPB1](#) [CAP-WCCMLPC1](#) [2274475-3](#) [914-614A2025S10200](#) [USB3FTV7SAGF059](#)  
[USB3FTV2SAZNF459](#) [USB3FTV7SAZNF459](#) [HYCW153-USBD05-500B](#) [HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#)  
[HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#) [KMMX-BSMT35S-1-B30TR](#)  
[2345986-1](#) [10082141-N340LF](#) [10117836-011LF](#) [GSB3C3133DSYHR](#)