TECHNOLOGY Value RAM

KVR13R9D4K3/48

48GB (16GB 2G x 72-Bit x 3 pcs.) PC3-10600 CL9 Registered w/Parity 240-Pin DIMM Kit

DESCRIPTION

ValueRAM's KVR13R9D4K3/48 is a kit of three 2G x 72-bit (16GB) DDR3-1333 CL9 SDRAM (Synchronous DRAM), registered w/parity, 2Rx4 ECC memory modules, based on thirty-six 1G x 4-bit FBGA components per module. Total kit capacity is 48GB. The SPDs are programmed to JEDEC standard latency DDR3-1333 timing of 9-9-9 at 1.5V. Each 240pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- JEDEC standard 1.5V (1.425V ~1.575V) Power Supply
- VDDQ = 1.5V (1.425V ~ 1.575V)
- 667MHz fCK for 1333Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 9, 8, 7, 6
- Programmable Additive Latency: 0, CL 2, or CL 1 clock
- Programmable CAS Write Latency(CWL) = 7 (DDR3-1333)
- 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- Bi-directional Differential Data Strobe
- Internal(self) calibration : Internal self calibration through ZQ pin (RZQ : 240 ohm ± 1%)
- On Die Termination using ODT pin
- On-DIMM thermal sensor (Grade B)
- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE ≤ 95°C
- Asynchronous Reset
- PCB : Height 1.180" (30.00mm), double sided component


SPECIFICATIONS

CL(IDD)	9 cycles
Row Cycle Time (tRCmin)	49.5ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	260ns (min.)
Row Active Time (tRASmin)	36ns (min.)
Maximum Operating Power	6.411 W* (per module)
UL Rating	94 V - 0
Operating Temperature	0° C to 85° C
Storage Temperature	-55° C to +100° C

*Power will vary depending on the SDRAM and Register/PLL used.

Continued >>

MODULE DIMENSIONS:

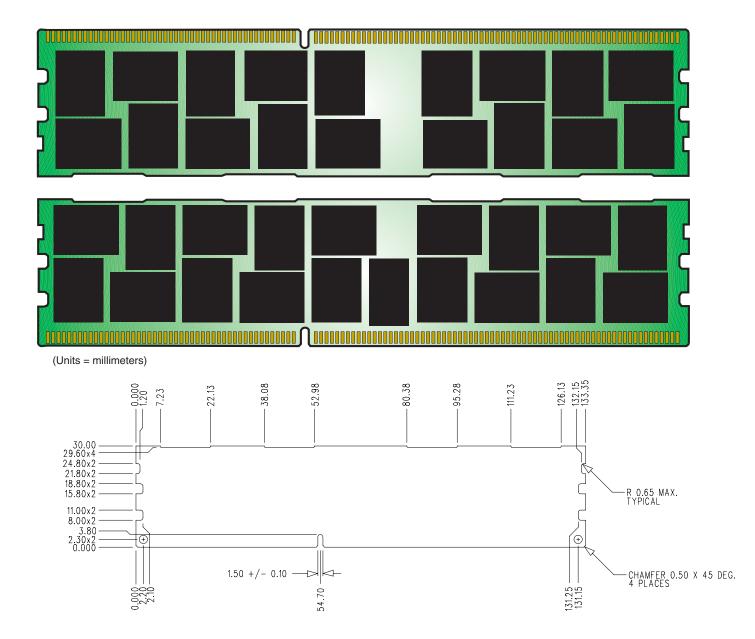

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for kingston manufacturer:

Other Similar products are found below :

 SDCA3/32GB
 SM2280S3G2/120G
 04EPOP08-NL3DM627-B02U
 SD4/32GB
 SEDC400S37/960G
 EMMC16G-W525-X01U
 08EPOP04

 NL3DT227-A01U
 SEDC1000H/1600G
 04EMCP04-NL2DM627-Z02U
 08EMCP04-NL3DT227-A01U
 B1621PM1WDGTKR-U

 B5116ECMDXGGB-U
 EMMC04G-W100-E08U
 SDA10/128GB
 D5128EETBPGGBU-U
 SDA3/32GB
 FCR-HS4
 D5128EC4BPGGBUI-U

 SKC400S37/1T
 KVR21R15D4/16
 SUV400S37/240G
 SKC400S37/512G
 SKC400S37/512G