Memory Module Specifications



KVR18R13D4/16KF

16GB 2Rx4 2G x 72-Bit PC3-14900 CL13 Registered w/Parity 240-Pin DIMM

DESCRIPTION

This document describes ValueRAM's 2G x 72-bit (16GB) DDR3-1866 CL13 SDRAM (Synchronous DRAM), registered w/parity, 1Rx4 ECC memory module, based on thirty-six 1G x 4-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR3-1866 timing of 13-13-13 at 1.5V. This 240-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- JEDEC standard 1.5V (1.425V ~1.575V) Power Supply
- VDDQ = 1.5V (1.425V ~ 1.575V)
- 933MHz fCK for 1866Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 13, 11, 10, 9, 8, 7, 6
- Programmable Additive Latency: 0, CL 2, or CL 1 clock
- · 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- · Bi-directional Differential Data Strobe
- Internal(self) calibration: Internal self calibration through ZQ pin (RZQ: 240 ohm ± 1%)
- On Die Termination using ODT pin
- On-DIMM thermal sensor (Grade B)
- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE ≤ 95°C
- Asynchronous Reset
- PCB: Height 1.180" (30.00mm), double sided component

SPECIFICATIONS

CL(IDD)	13 cycles
Row Cycle Time (tRCmin)	47.125ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	260ns (min.)
Row Active Time (tRASmin)	34ns (min.)
Maximum Operating Power	6.492 W*
UL Rating	94 V - 0
Operating Temperature	0° C to 85° C
Storage Temperature	-55° C to +100° C


^{*}Power will vary depending on the SDRAM and Register/PLL used.

SDRAM SUPPORTED

Kingston (F-Die)

Continued >>

MODULE DIMENSIONS:

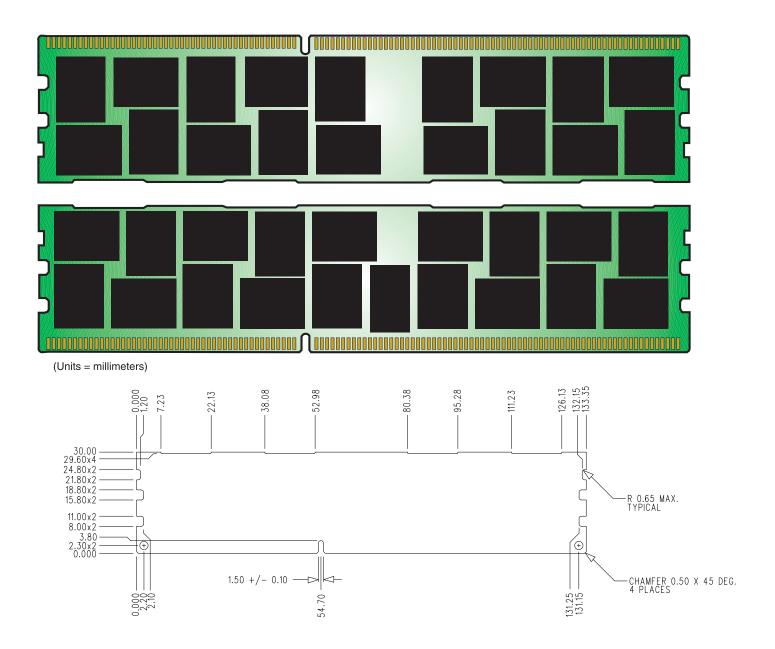

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for kingston manufacturer:

Other Similar products are found below:

SDCA3/32GB SM2280S3G2/120G 04EPOP08-NL3DM627-B02U SD4/32GB SEDC400S37/960G EMMC16G-W525-X01U 08EPOP04-NL3DT227-A01U SEDC1000H/1600G 04EMCP04-NL2DM627-Z02U 08EMCP04-NL3DT227-A01U B1621PM1WDGTKR-U B5116ECMDXGGB-U EMMC04G-W100-E08U SDA10/128GB KVR13N9S8H/4 D5128EETBPGGBU-U SDA3/32GB D5128EC4BPGGBUI-U SKC400S37/1T KVR21R15D4/16 CF/256 SUV400S37/240G SKC400S37/512G