

# Dual-in-line Switches ultra-low profile




## Specifications:

Contact rating:	50 V DC, 100 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 1000 MΩ at 100 V DC
Capacity:	< maximum 5 pF between 2 poles
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20 °C to +80 °C
Mechanical life:	minimum 1 000 operations per pole
Shock resistance:	contact interruption < 10 μsec with triple shock in all 6 directions shock conditions: 20 G, 11 msec duration (sine half wave)
Vibration:	contact interruption: < 10 μsec at vibration test in accordance with MIL-STD-202 D, method 204, condition C
Contacts:	copper beryllium, gold-plated over nickel
Terminals:	PC terminals, nickel silver, gold-plated
Material:	case and slide: PA
Construction:	case sealed, slide recessed, sealed with protective tape
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	wave-soldering – max.: 3 sec, 245 °C ± 10 °C


## Models:

### Series DSS 500

Type	Poles	Length (A)
DSS 502	2	6.30 mm
DSS 504	4	11.40 mm
DSS 506	6	16.50 mm
DSS 508	8	21.55 mm
DSS 510	10	26.65 mm



washable

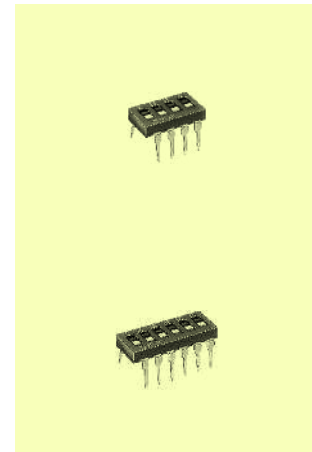

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [Knitter-Switch](#) manufacturer:*

Other Similar products are found below :

[78M03S](#) [79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [A7SS-M](#) [DBP 2110](#) [DBP 2112](#) [DBS1008](#) [DHN02FTVTR](#) [DHN10T](#) [DHS108](#)  
[DPL08TN](#) [DRD16CSE04](#) [DRR4010](#) [DRR60016](#) [DRS4016](#) [BD06E](#) [1825008-1](#) [1825444-1](#) [25.350.0653.0](#) [LA2-DC12](#) [SBS 5004 TG](#)  
[SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [2161391-1](#) [2-1825058-8](#) [CCVA 2.5/ 4-G-5.08](#) [P26THRR32](#)  
[25.330.0653.1](#) [25.352.0353.0](#) [MDG305ST](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DBP2008](#) [DBS1003](#) [DBS2008](#) [438872000](#)  
[DRD10CRAE04](#) [DRS1604](#) [DSR02T](#) [DSS 208 N](#) [5-1825033-1](#) [106-SDN06-EV](#) [1-1437507-6](#) [E2FMX2D1M1TGJ03M](#)  
[E3ZMCT81M1TJ03M](#)