

a Knowles Precision Devices brand

42.5 GHz Surface Mount Bandpass Filter



www.knowlescapacitors.com

B424MEZS

DESCRIPTION

SPECIFICATIONS*


FEATURES

- Small Size
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

Parameter	Frequency Range (GHz)	Min	Тур.	Max
Insertion Loss (dB)	39.7 - 45.3		1.5	2
Return Loss (dB)		9.5	10	12
Low Side Rejection (dB)	DC - 37	30	40	
High Side Rejection (dB)	47.5 - 60	20	30	
Input Power (W)				TBD
Size (L x W x H)	0.236 x 0.080 x 0.065 in 6.00 x 2.03 x 0.1.65 mm			

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary ± 0.5 dB over temperature.

** Customer is required to provide shielding for part to ensure proper performance.

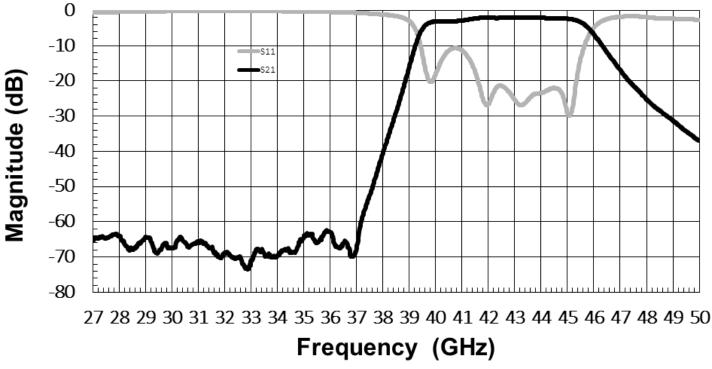

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com

Typical Measured Performance




42.5 GHz Surface Mount Bandpass Filter



B424MEZS

Physical Dimensions

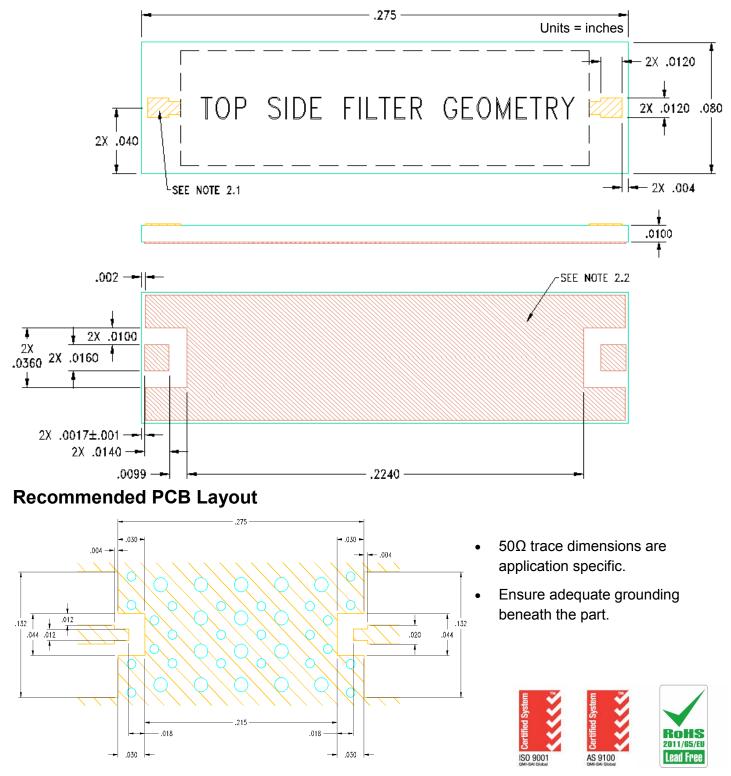

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Knowles manufacturer:

Other Similar products are found below :

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF BD2425J50200AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C PD0922J5050D2HF 1E1305-3 1G1304-30 B0922J7575AHF 2020-6622-20 TP-102-PIN TP-103-PIN BD1222J50200AHF