

MDE Series
Molding Power Inductors
Size 1040




FEATUERS

- High rated current
- Frequency up to 3 MHz
- 125 °C maximum total temperature operation
- Low core loss
- Ultra low buzz noise due to molding construction
- Halogen Free & ROHS compliant
- Quantity: 500pcs


APPLICATION

- Laptops and PCs
- Switch and servers
- Base stations
- DC/DC converters
- Battery powered devices
- SSD modules

Dimensions: [mm]

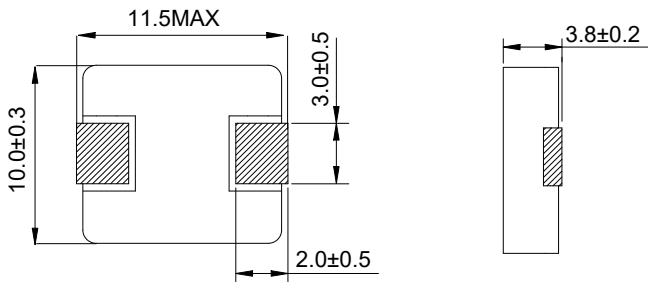

Land Pattern: [mm]



Electrical Properties:


Part No.	L@100KHz /1V (µH)	Tolerance	R _{DC} Max. (mΩ)	I _{sat} Typ. (A)	I _R Typ. (A)
MDE1040-R15M	0.15	±20%	0.65	75	45
MDE1040-R22M	0.22	±20%	1.0	60	35
MDE1040-R30M	0.3	±20%	1.1	45	35
MDE1040-R36M	0.36	±20%	1.2	45	30
MDE1040-R47M	0.47	±20%	1.7	40	30
MDE1040-R56M	0.56	±20%	1.8	33	25
MDE1040-R68M	0.68	±20%	2.4	30	23
MDE1040-R80M	0.8	±20%	2.7	29	23
MDE1040-1R0M	1.0	±20%	3.3	28	19
MDE1040-1R5M	1.5	±20%	4.2	24	16
MDE1040-2R2M	2.2	±20%	7.0	16.5	12

Part No.	L@100KHz /1V (μH)	Tolerance	R _{Dc} Max. (mΩ)	I _{sat} Typ. (A)	I _R Typ. (A)
MDE1040-3R3M	3.3	±20%	11.8	16	11
MDE1040-4R7M	4.7	±20%	20	13	9
MDE1040-6R8M	6.8	±20%	25	12	8.5
MDE1040-8R2M	8.2	±20%	27	9	8
MDE1040-100M	10	±20%	30	8.5	7.8
MDE1040-150M	15	±20%	45	7	6.5
MDE1040-220M	22	±20%	66	5.5	5
MDE1040-330M	33	±20%	92	4.8	4.4
MDE1040-470M	47	±20%	145	3.5	3.3
MDE1040-680M	68	±20%	195	3	2.5


Operating temperature range - 55 °C to + 125 °C
 I_R will cause the coil temperature approximate ΔT40 °C
 I_{sat} will cause to drop approximately 30 %

Typical Electrical Characteristics:

Inductance vs DC Current Characteristics:

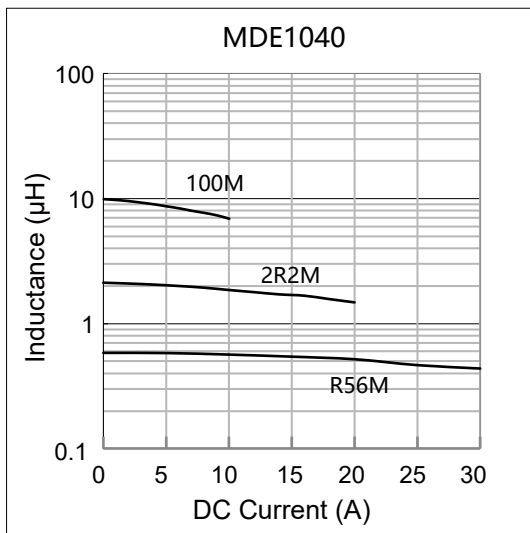

Temperature Rise vs DC Current Characteristics:

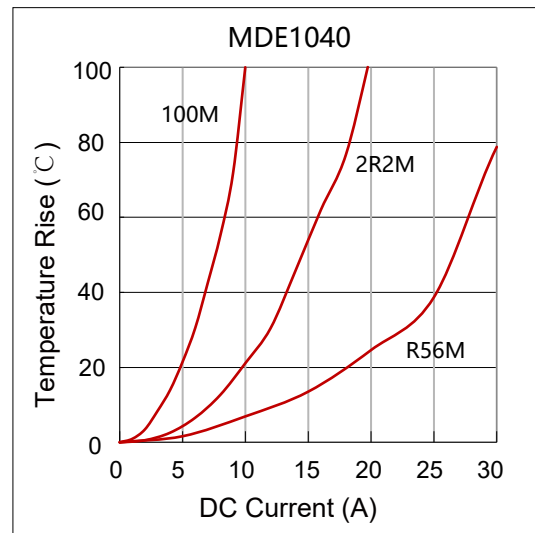

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)