



**SPM Series**  
**SMT Power Metal Inductor**  
**Size 2512**




**CHARACTERISTICS**

- Large current, Low DC-resistance, High efficiency by magnetic metal powder
- Low acoustic noise and low leakage flux noise by shielded construction
- Operating temperature:  $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$
- Quantity: 3000 pcs/reel
- AEC-Q200 Compliant

**Dimensions: [mm]**

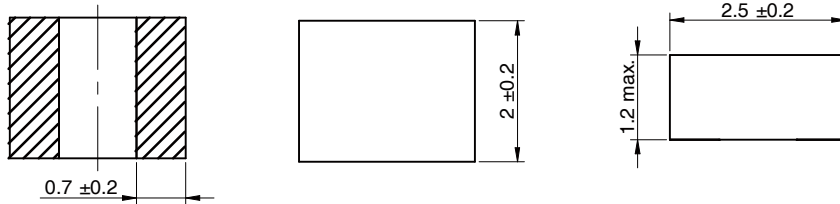

**Land Pattern: [mm]**













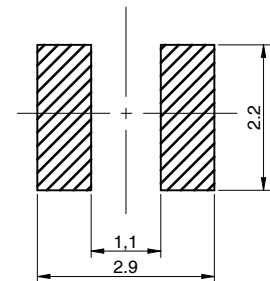


**Electrical Properties:**

Part No	Inductance (μH)	Tolerance	Temperature Rise Current Typ. (A)	Saturation Current Typ. (A)	DCR Max. (mΩ)	DCR Typ. (mΩ)
SPM2512-R47N	0.47	± 30%	3.40	6.70	40	30
SPM2512-R56N	0.56	± 30%	3.10	6.40	49	37
SPM2512-R68N	0.68	± 30%	2.90	6.10	59	45
SPM2512-1R0M	1.0	± 20%	2.80	5.70	60	49
SPM2512-1R2M	1.2	± 20%	2.40	5.30	80	67
SPM2512-1R5M	1.5	± 20%	2.20	4.20	99	82
SPM2512-2R2M	2.2	± 20%	1.60	3.40	141	123
SPM2512-3R3M	3.3	± 20%	1.20	3.00	260	226
SPM2512-4R7M	4.7	± 20%	1.00	2.10	345	300
SPM2512-5R6M	5.6	± 20%	0.90	1.90	465	405
SPM2512-6R8M	6.8	± 20%	0.80	1.80	640	560
SPM2512-8R2M	8.2	± 20%	0.75	1.70	720	630
SPM2512-100M	10	± 20%	0.70	1.50	780	680

Temperature rise current: the actual value of DC current when the temperature rise is  $\Delta T40^{\circ}\text{C}$   
 Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

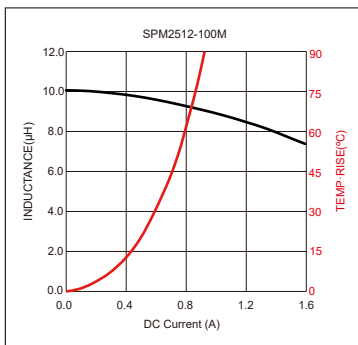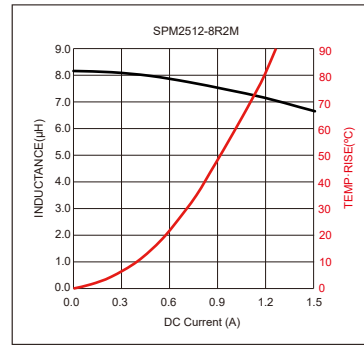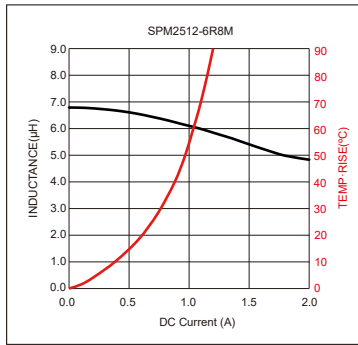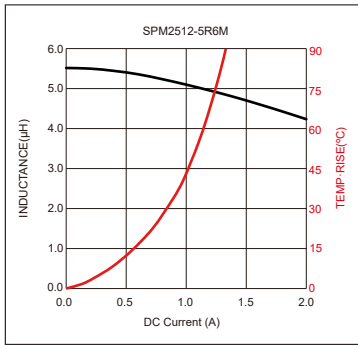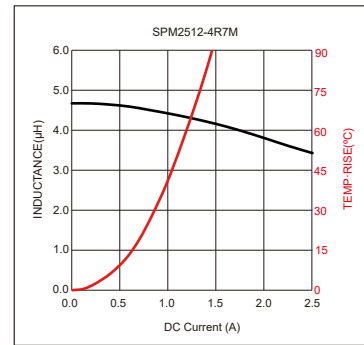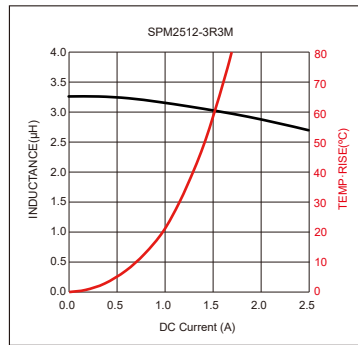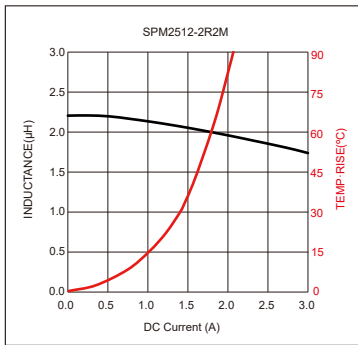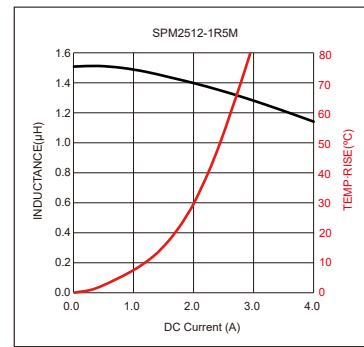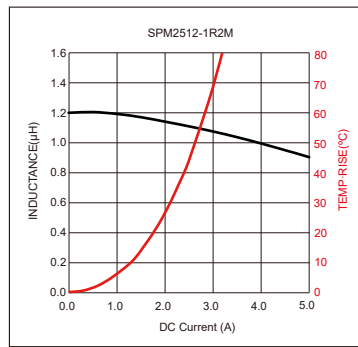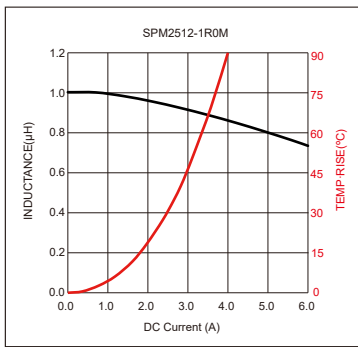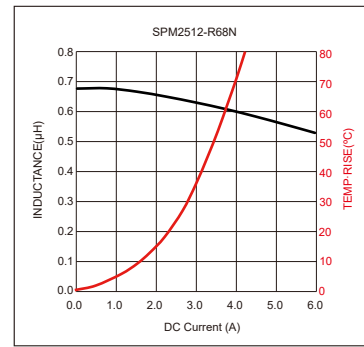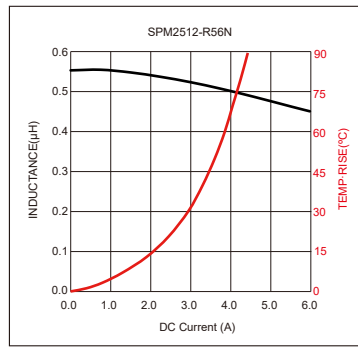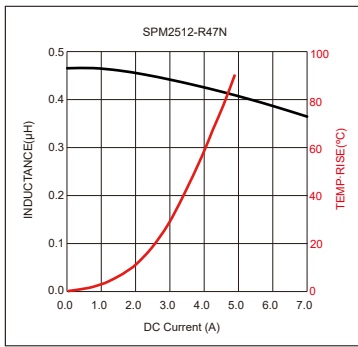

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)  
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)  
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)  
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)  
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)  
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)