



Part No. 9000984-XLPDNB External Hinged ISM Antenna

790 / 868 / 915 MHz

Supports: NB-IoT, SigFox, LoRa, Cellular LPWA, RPMA, Tracking, LPWAN, Smart Metering



External Hinged ISM Antenna

790 - 960 MHz

KEY BENEFITS

Greater Flexibility

Different connector options upon request. Small form factor and low profile. Independent of ground, the performances are maintained across design.

Quicker Time-to-Market

Standard antenna eliminates design fees, redesign cycle time and minimize risk associated with a customer solution. Quicker time to market.

Reliability

Products are the latest RoHS version compliant

APPLICATIONS

- Medical applications
- Home automation
- Smart metering
- Industrial devices
- IoT
- Healthcare
- Tracking
- NB-IoT
- Sigfox
- LoRa
- Cellular LPWAN
- M2M

Ethertronics' family of external antennas are designed to offer the best performances for a wide range of applications. This sleek hinged External ISM antenna covers 790MHz, 868MHz, and 915MHz bands and is specifically designed for industrial communication implementation requiring a plug-and-play solution.

Global Operations & Design Support

Ethertronics' global operations supports an integrated network of design centers that can take projects from concept to production.

Electrical Specifications

Typical Characteristics in Free Space and on a connected to a 200 x 200 mm ground plane and under PC/ABS plastic cover

Frequency	790 MHz	868 MHz	915 MHz
Mounting	Off Ground / On Ground		
Return Loss (dB)	-4 / -4	-17 / -13	-9 / -13
Efficiency (%)	40 / 40	85 / 80	75 / 82
Peak Gain (dBi)	2.2		3.4
Impedance (Ω)	50		
Working Temperature	-40°C to +120°C		

Mechanical Specifications & Ordering Part Number

Ordering Part Number	9000984-XLPDNB
Size (mm)	196 x 13
Connector	SMA Male (RP-SMA available upon request)
Hinge	Foldable 90 degrees at the hinge level
Color	Black (other colors available upon request)





External ISM/LoRa/Sigfox antenna specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Return Loss and Efficiency Plots

Typical Characteristics (measurements taken in Free Space and on a 200 x 200 mm ground plane)

- 9000984-XLPDNB (Free Space)
- 9000984-XLPDNB (200 x 200 mm ground plane)

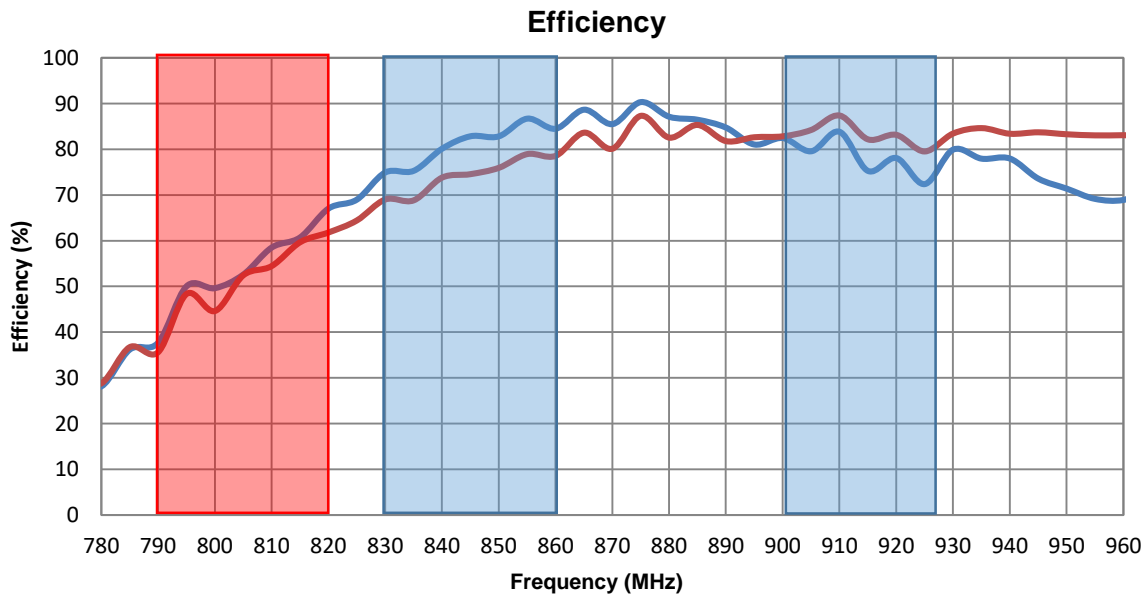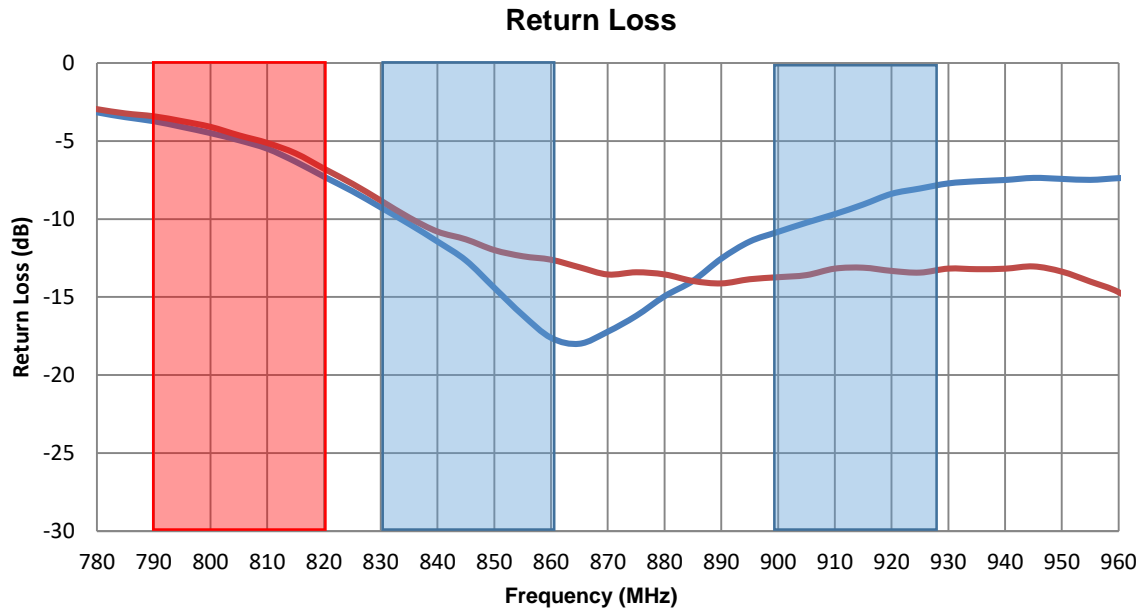



External ISM/LoRa/Sigfox antenna specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.


Antenna Radiation Patterns

Typical Characteristics (measurements taken in Free Space and on a 200 x 200 mm ground plane)


- 9000984-XLPDNB (Free Space)
- 9000984-XLPDNB (200 x 200 mm ground plane)




Measured at 790 MHz

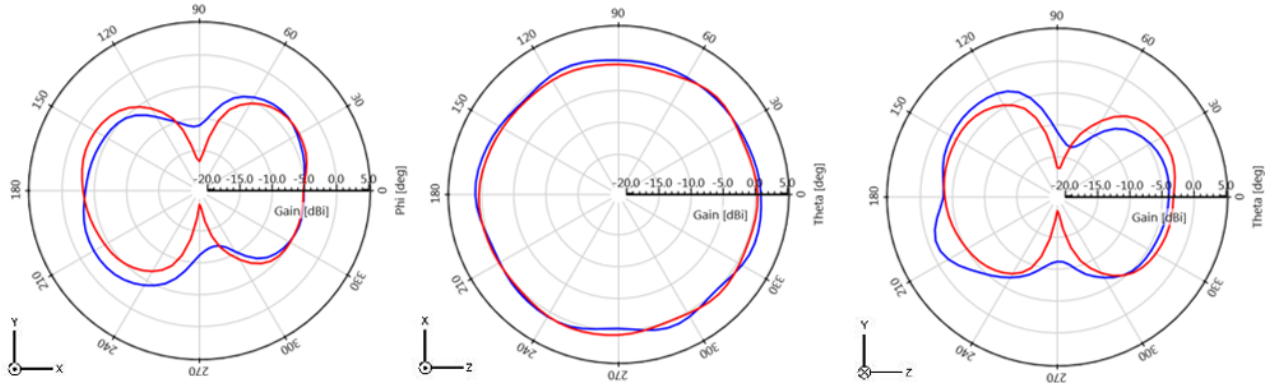

Measured at 850 MHz

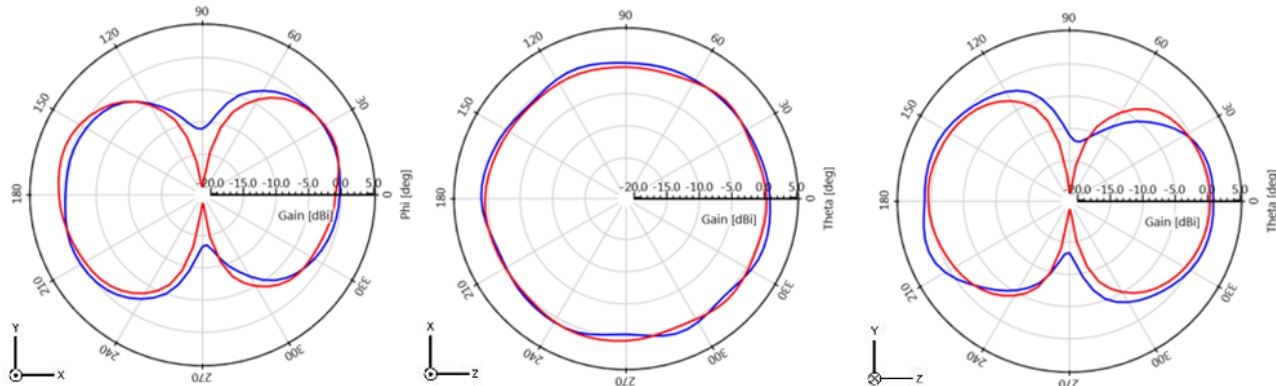

Measured at 950 MHz

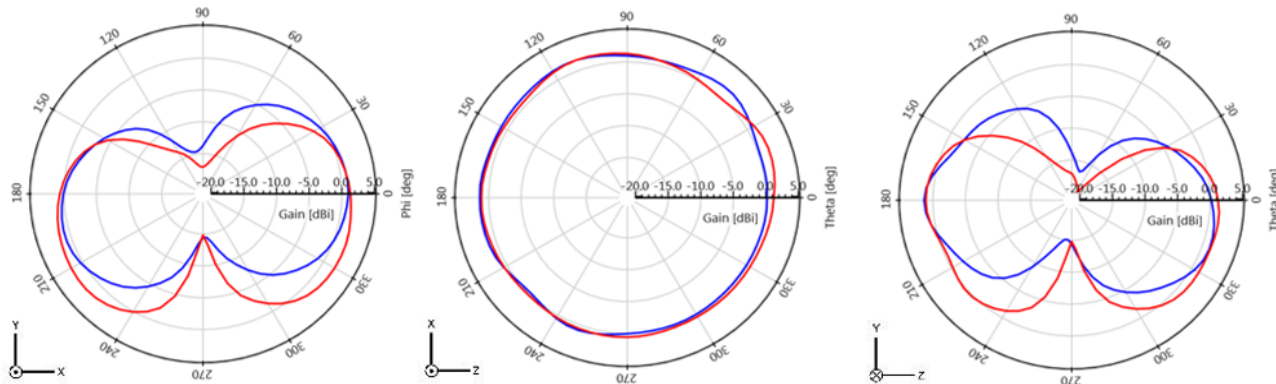





External ISM/LoRa/Sigfox antenna specifications
Ethertronics produces a wide variety of standard and custom antennas to meet user needs.

Antenna Dimensions

Typical antenna dimensions, in mm.

Part Number	A (mm)	B (mm)	C (mm)	D (mm)	Connector
9000984-XLPDNB	196 ± 3.0	13.0 ± 0.1	6.01 ± 0.1	165 ± 2.0	SMA (Male)

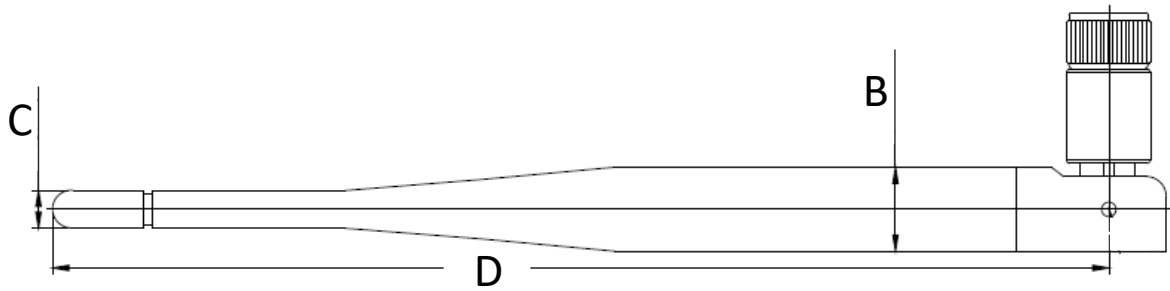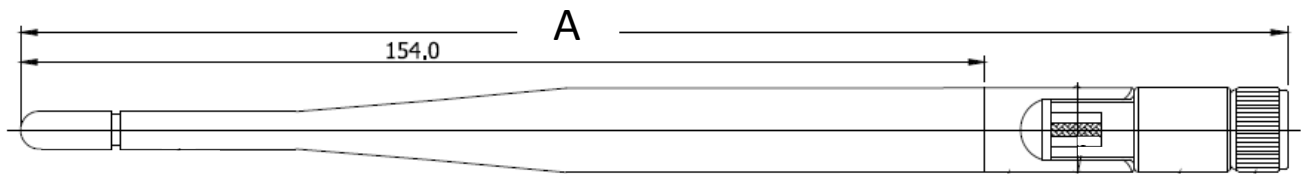

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Kyocera AVX](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)