





Liquid Level Pump Controller

WIRING



DIMENSIONS

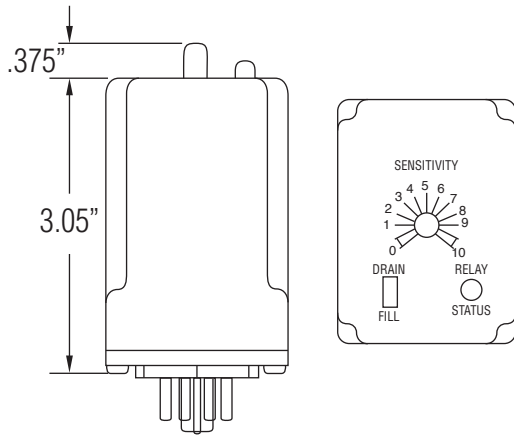

ORDERING INFORMATION

	CPR	P	S	XX
SERIES				
SHIELD MATERIAL "A"				
P - PVC (66°C)				
PROBE TIP MATERIAL "B"				
S - 316 STAINLESS STEEL				
LENGTH OF WIRE "C"				
10 - 10 FEET	20 - 20 FEET			
30 - 30 FEET	40 - 40 FEET			
## - LENGTH IN FEET				

OPERATIONS

The ATC Diversified LPC Series is a conductive liquid level controller that uses two probes to sense tank level. There are two modes of operation that are user selectable.

Drain (Pump Down): The output relay will pick-up and the LED will turn on when the liquid level reaches the high level probe. When the liquid level falls below the low level probe the relay will drop-out and the LED will turn off.

Fill (Pump UP): The output relay will pick-up and the LED will turn on when the liquid level falls below the low level probe. When the liquid level reaches the high level probe the relay will drop-out and the LED will turn off.

SPECIFICATIONS

SUPPLY VOLTAGE	24V AC, 120V AC, 240V AC (+10/-20%)
SUPPLY VOLTAGE	See ordering information below
SUPPLY VOLTAGE	Pulsed 5V DC, at terminals
SENSITIVITY	Adjustable: 1K \pm 500 Ω at low end 100K Ω \pm 25% at high end
UNIT OPERATION	Drain or Fill (User Selectable)
OUTPUT RATING	One SPDT, 5 Amps Resistive @ 240V AC
ISOLATION	1,500 volts
POWER CONSUMPTION	24 V Model 6VA, 120 V Model 6VA, 240 V Model 8VA
TEMPERATURES	Operate: -20°C to +60°C Storage: -40°C to +80°C
TERMINATIONS	8-PIN OCTAL HEADER
LED INDICATORS	Red LED illuminates when relay is active
ENCLOSURE	Style "A" 8 Pin Plug-In
AGENCY APPROVALS	cULus E55826

MODEL NUMBER


LPC	XXX	AAA
-----	-----	-----

SUPPLY VOLTAGE

24 Volts AC	24
120 Volts AC	120
240 Volts AC	240

ACCESSORY:

CPR Series Conductive Probes
Stainless Steel Tip, PVC Cable, Corrosion Res.

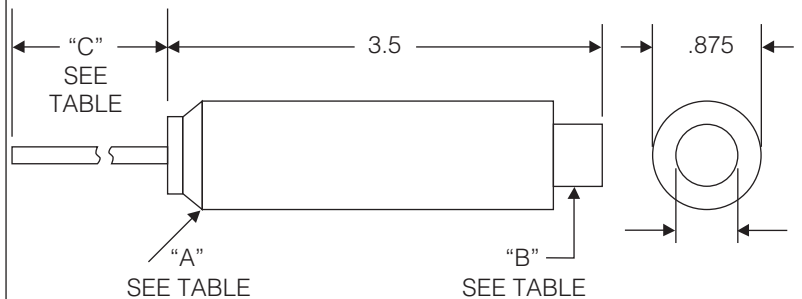

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Level Controllers](#) category:

Click to view products by [Kyocera AVX](#) manufacturer:

Other Similar products are found below :

[61F-LS-CP11-BRC](#) [3UG4501-1AW30](#) [K8DT-LS1TD](#) [K8DT-LS1TA](#) [LLC16A25AX](#) [LLC54BA](#) [LLC54AA](#) [LLC845F25P](#) [LLC843F10P](#)
[CLD2EA1C230](#) [CLD1EA1CM24](#) [CLD4MA2D230](#) [CLD4MA2DM24](#) [61FGPN8DAC120](#) [61F-HSL AC220](#) [84870503](#) [CLD2EA1C115](#)
[CLD2EA1CM24](#) [CLD2EB1BU24](#) [CLD4MA2D115](#) [CLP2FA1B115](#) [84870200](#) [84870203](#) [84870210](#) [84870211](#) [84870213](#) [84870214](#)
[84870404](#) [84870700](#) [84870720](#) [DNR110A](#) [DNRU220A](#) [NNR220A](#) [NNR24A](#) [PNR110A](#) [PNR24A](#) [PNRT24A](#) [PNRU110A](#) [PNRU220A](#)
[PNRU24A](#) [K8DT-LS1CA](#) [CPR-P-S-30](#) [CPR-P-S-40](#) [LLC54BAS](#) [61F-11](#) [61FD21TV1100240VAC](#) [61F-GP-NT AC110](#) [61F-GPN-V50-](#)
[AC110](#) [61F-GPN-BT 24VDC](#) [61F-GP-NH AC24](#)