



# 深圳市凯越翔电子有限公司

## 石英谐振器规格书

|         |                   |
|---------|-------------------|
| 产品名称:   | 石英晶体谐振器           |
| 产品型号:   | 49USSMD/12.000MHZ |
| 产品参数:   | 20PF/±30ppm       |
| 原厂型号:   | KSB120002030      |
| 凯越翔技术部: | 董宗全               |

### 客 户 确 认 栏


|       |       |
|-------|-------|
| 认证印章  | 负责人印章 |
| 年 月 日 | 年 月 日 |

本规格章程连同本页共 5 页

## 产品规格书

|                                   |  |
|-----------------------------------|--|
| <b>1.GENERAL</b>                  |  |
| 1.1 HOLDER TYPE                   | 49USSSMD   |
| 1.2 MODE OF VIBRATION             | AT CUT   |
| 1.3 OSCILLATION MODE              | FUND   |
| 1.4 TEST FACILITIES               | S&A KH-1240  |
| 1.5 STORAGE TEMPERATURE           | -40℃ TO +85℃   |
| 1.6 DRIVER LEVEL                  | 100 μ W  |
| <b>2.ELECTRICAL PARAMETER</b>     |  |
| 2.1 NORMAL FREQUENCY              | 12.000 MHz   |
| 2.2 FREQUENCY TOLERANCE (25℃ ±2℃) | ±30ppm   |
| 2.3 TEMPERATURE STABILITY         | ±20ppm   |
| 2.4 OPERATING TEMPERATURE RANGE   | -20℃ TO + 70℃  |
| 2.5 LOAD CAPACITANCE              | 20 PF  |
| 2.6 MOTIONAL CAPACITANCE          |  |
| 2.7 SHUNT CAPACITANCE             | 7PF MAX  |
| 2.8 EFFECTIVE SERIES RESISTANCE   | 80 Ω MAX   |
| 2.9 INSULATION RESISTANCE         | 500M OHMS MIN AT DC 100V   |
| <b>3.MECHANICAL PARAMETER</b>     |  |
| 3.1 SOLDERABILITY                 | 95%COVERAGE BY USING 90/10<br>SOLD AT 245℃ FOR 5 SEC. DIPPING<br>AFTER IMMERSION IN ALPHA 611<br>FLUX FOR 5 SEC. |

|   |       |                                 |      |         |                    |     |        |               |       |           |              |      |       |         |      |                                 |
|---|-------|---------------------------------|------|---------|--------------------|-----|--------|---------------|-------|-----------|--------------|------|-------|---------|------|---------------------------------|
|   |       |                                 |      |         |                    |     |        |               |       |           |              |      |       |         |      |                                 |
| <p>I MECHANICAL ENDURANCE 机械特性</p> <p>Provided that measurement shall be carried out after letting it alone in the room temperature for 1 hour.<br/>                 试验产品应在室温下放置 1 小时后方可进行以下试验。</p> <p>①SHOCK 抗击测试<br/>                 Electrical characteristics shall be satisfied after dropping three time from the height of 50 cm onto Hard wooden board .<br/>                 产品从 50 cm 高度自由落下到硬木板 3 次电气参数仍符合要求。</p> <p>②VIBRATION 抗振测试<br/>                 Electrical characteristics shall be satisfied after supplying following Vibration .<br/>                 电气性能应满足以下的振动要求。</p> <table border="0"> <tr> <td>(1)VIBRATION FREQUENCY</td> <td>振动频率</td> <td>10—55Hz</td> </tr> <tr> <td>(2)REPEATED PERIOD</td> <td>周 期</td> <td>1—2min</td> </tr> <tr> <td>(3)FULL CYCLE</td> <td>全 振 幅</td> <td>1.5mm P—P</td> </tr> <tr> <td>(4)DIRECTION</td> <td>振动方向</td> <td>X.Y.Z</td> </tr> <tr> <td>(5)TIME</td> <td>振动时间</td> <td>2hours/each direction 2 小时/每个方向</td> </tr> </table> <p>③STRENGTH OF TERMINALS/LEAD—WIRES 引脚与基座底部的强度测试</p> <p>-1 PULLING 拉力测试</p> <p>a)Body of specimen shall be fixed, and 900g of tension weight shall be supplied gradually to axial direction of terminals/lead-wires for 30 sec .<br/>                 产品应固定在 900g 的拉力的情况下逐渐延基座底部/引线脚中轴方向拉 30 秒钟。</p> <p>b)After above test a), there is no observation of any visual damages on the specimen.<br/>                 经过 a)的测试, 产品应没有任何可以目测到的损坏。</p> <p>-2 BENDING 弯曲度测试</p> <p>a)Body of specimen shall be fixed, and 90degree bending shall be given, being supplied 225gs tension weight .<br/>                 After that, terminals/lead-wires shall be straightened gradually .<br/>                 Then the same bending and straightening shall be supplied to the opposite direction in the same axial . (Refer to Fig-1)<br/>                 产品固定后, 以 90° 的弯曲并供以 225g 的拉力, 然后沿同一轴线并与相反的方向 90° 的弯曲及伸直。(产品结构如图 1 所示)</p> <p>b)After above test a), there is no observation of any visual damages on the specimen .<br/>                 通过 a)测试后, 晶体上应没有任何可以目测到的损坏。</p> |       | (1)VIBRATION FREQUENCY          | 振动频率 | 10—55Hz | (2)REPEATED PERIOD | 周 期 | 1—2min | (3)FULL CYCLE | 全 振 幅 | 1.5mm P—P | (4)DIRECTION | 振动方向 | X.Y.Z | (5)TIME | 振动时间 | 2hours/each direction 2 小时/每个方向 |
| (1)VIBRATION FREQUENCY  | 振动频率  | 10—55Hz                         |      |         |                    |     |        |               |       |           |              |      |       |         |      |                                 |
| (2)REPEATED PERIOD  | 周 期   | 1—2min                          |      |         |                    |     |        |               |       |           |              |      |       |         |      |                                 |
| (3)FULL CYCLE   | 全 振 幅 | 1.5mm P—P                       |      |         |                    |     |        |               |       |           |              |      |       |         |      |                                 |
| (4)DIRECTION  | 振动方向  | X.Y.Z                           |      |         |                    |     |        |               |       |           |              |      |       |         |      |                                 |
| (5)TIME   | 振动时间  | 2hours/each direction 2 小时/每个方向 |      |         |                    |     |        |               |       |           |              |      |       |         |      |                                 |

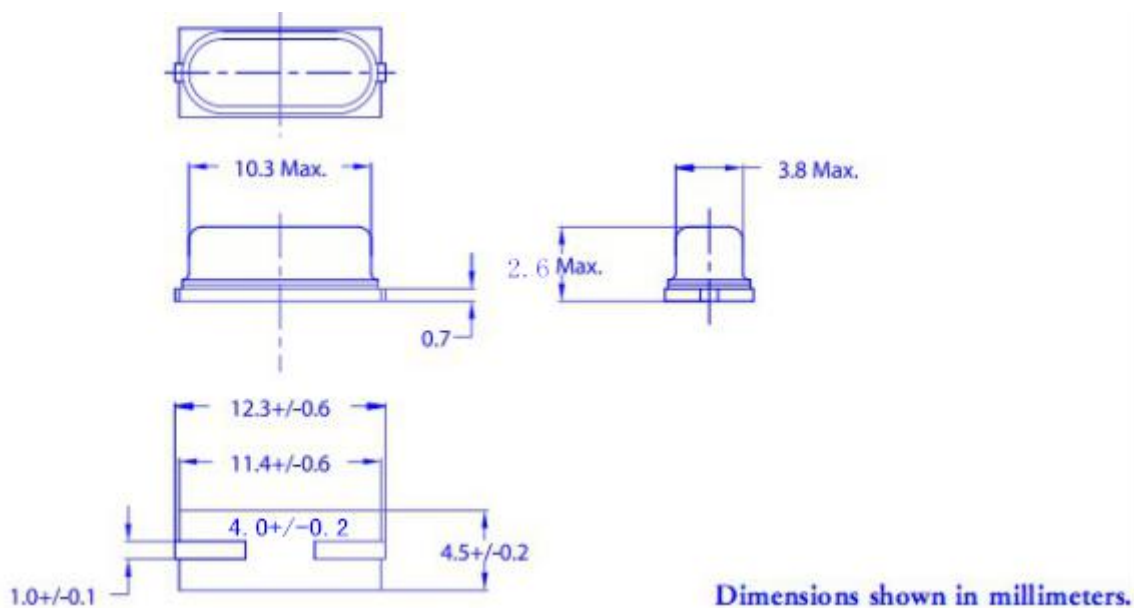

④ SEALING TIGHTNESS 气密性测试

There is no observation of gas bubble after specimen put in hot water at +90°C—+95°C for 5 min .

晶体置于+90°C—+95°C的热水中 5 分钟，应没有气泡产生。

⑤ SOLDERING DIP 浸锡测试

Terminals/lead-wires of specimen shall be dipped into solder melted tank at +230°C—±5°C for 3sec . Dipping depth shall be 2mm from the bottom of specimens body . (After applying ROSIN flux) Soldering portion shall be covered in over 90% of terminals/lead-wires dipped .

将晶体引线脚置于+230°C—±5°C的锡桶中 3 分钟，基座底部离锡表面 2mm，（加上松香焊剂后）引线脚的沾锡率为 90%以上。

⑥ SOLDER HEATING 沾锡耐热性测试

Terminals/lead-wires of specimen shall be dipped into solder melted tank at

+350°C—±10°C for  $\frac{1}{3}$ <sub>-0</sub> sec .

Electrical characteristics shall be satisfied after dipping depth shall be 2mm from edge of terminals/lead-wires .

将已沾锡的产品的引线脚置于+350°C—±10°C的锡桶中 3-4 秒钟后 基座底部离锡表面 2mm，电气性能仍符合要求。

II ENVIRONMENTAL ENDURANCE 环境特性

Provided that measurement shall be carried out after letting it alone in the room temperature for 1 hour .

必须将试验产品在室温下放置 1 小时后方可进行测试。

① HUMIDITY 耐湿测试

Electrical characteristics shall be satisfied after letting it alone at  $60^{\circ}\text{C}\pm 2^{\circ}\text{C}$  in humidity of 90—95% for 250 hours .

试验产品在温度为  $60^{\circ}\text{C}\pm 2^{\circ}\text{C}$ ，相对湿度 90—95%的试验箱内放置 250 小时后电气性能仍符合要求。

② STORAGE IN LOW TEMPERATURE 低温储存测试

Electrical characteristics shall be satisfied after letting it alone at  $-30^{\circ}\text{C}\pm 2^{\circ}\text{C}$  for 250 hours .

试验产品在温度为  $-30^{\circ}\text{C}\pm 2^{\circ}\text{C}$  的试验箱中放置 250 小时后电气性能仍符合要求。

③ STORAGE IN HIGH TEMPERATURE 高温储存测试

Electrical characteristics shall be satisfied after letting it alone at  $+85^{\circ}\text{C}\pm 2^{\circ}\text{C}$  for 250 hours .

试验产品在温度为  $+85^{\circ}\text{C}\pm 2^{\circ}\text{C}$  的试验箱中放置 250 小时后电气性能仍符合要求。

④ TEMPERATURE CYCLE 温度变换测试

Electrical characteristics shall be satisfied after supplying the following temperature cycle (3cycles) .

Temperature shift from low to high, high to low shall be done in  $1^{\circ}\text{C}/\text{min}$  (Refer to Fig-2) .

电气性能应满足以下温度周期要求（3 个周期）

温度变换从低到高，从高到低变化量为  $1^{\circ}\text{C}/\text{分}$ 。（如图 2 所示）



PIG — 2

|     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|
| 拟 制 | 成望生 | 审 核 | 董宗全 | 批 准 | 谢为亮 |
|-----|-----|-----|-----|-----|-----|

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [KYY](#) manufacturer:*

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [CX2520DB16000H0HPQCC](#) [MMCC2R32.7680KHZ](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#)