

CARMEN-50-RS-C

~12° spot beam. Assembly with holder C compatible with LEDiL HEKLA.

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 50.0 mm
Height	25.5 mm
Fastening	socket
ROHS compliant	yes 🛈



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
CARMEN-50-RS	Single lens	PMMA	clear	
CARMEN-50-HLD-C	Holder	PC	black	


ORDERING INFORMATION:

» Box size: 476 x 273 x 292 mm

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CP16106_CARMEN-50-RS-C	Single lens	308	112	28	7.2




PRODUCT CP16106_CARMEN-50-RS-C

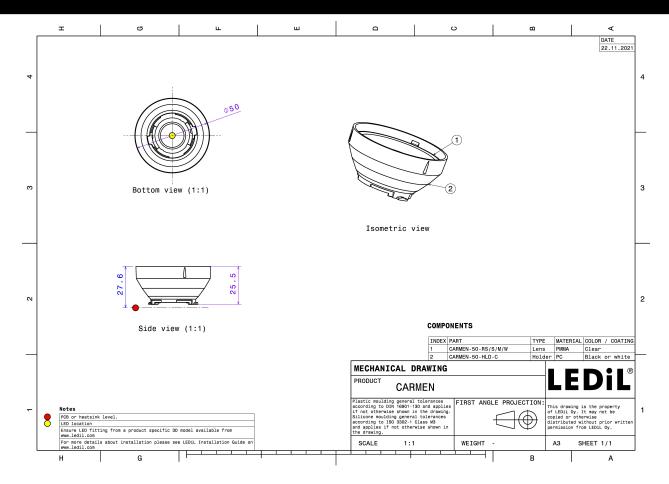

See also our general installation guide: www.ledil.com/installation_guide



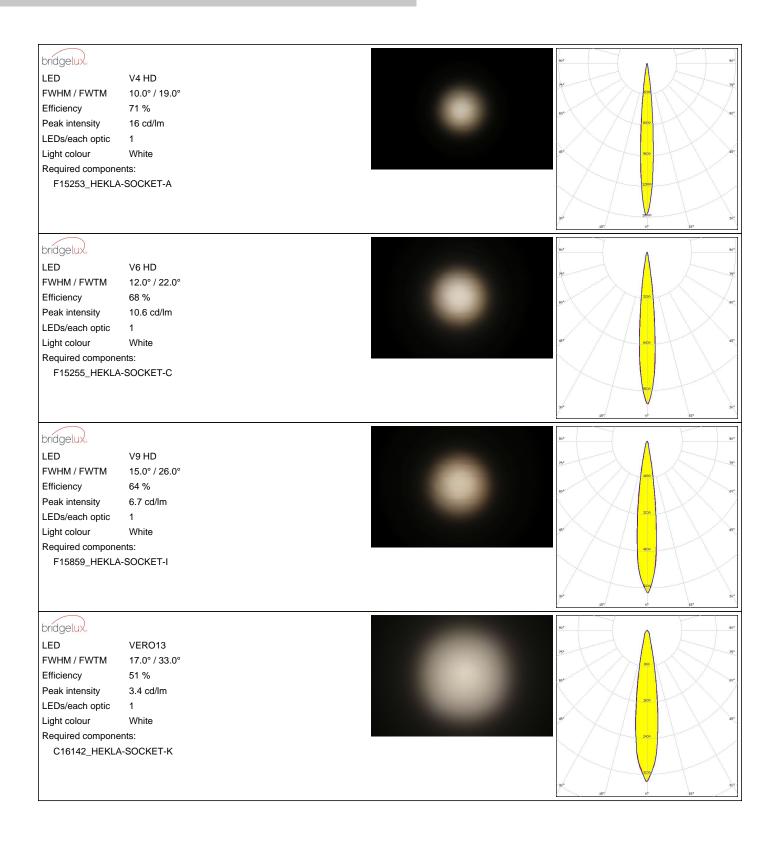



bridgelux

 LED
 Vesta TW 6mm DP

 FWHM / FWTM
 11.0° / 21.0°

 Efficiency
 59 %

 Peak intensity
 9.9 cd/lm

 LEDs/each optic
 1

 Light colour
 White

 Required components:
 C16142_HEKLA-SOCKET-K

Bender Wirth: 504 Typ L8



bridgelux.

LED Vesta TW 9mm (9W) DP

FWHM / FWTM 15.0° / 28.0°

Efficiency 54 %


Peak intensity 5.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:


C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8

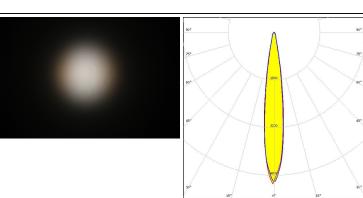


CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 16.0° / 29.0°
Efficiency 63 %
Peak intensity 5.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C






CITIZEN

LED CLU700/701/702
FWHM / FWTM 11.0° / 21.0°
Efficiency 67 %
Peak intensity 11.8 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15255_HEKLA-SOCKET-C








CITIZEN

LED CLU710/711
FWHM / FWTM 14.0° / 27.0°
Efficiency 62 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

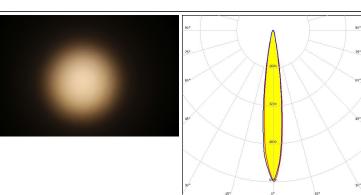


CITIZEN

LED CLU7A2 (LES 4.2mm)

FWHM / FWTM 9.0° / 18.0°
Efficiency 72 %
Peak intensity 18.5 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C

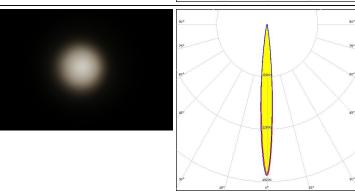


CITIZEN

Required components:

LED CLU7B2
FWHM / FWTM 8.0° / 17.0°
Efficiency 71 %
Peak intensity 20 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15255_HEKLA-SOCKET-C

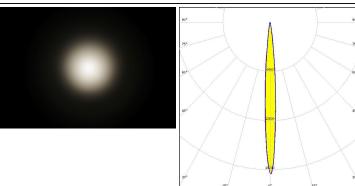


CREE - LED


LED CMA1516
FWHM / FWTM 16.0° / 29.0°
Efficiency 65 %
Peak intensity 5.9 cd/lm
LEDs/each optic 1
Light colour White


Required components: F15256_HEKLA-SOCKET-D









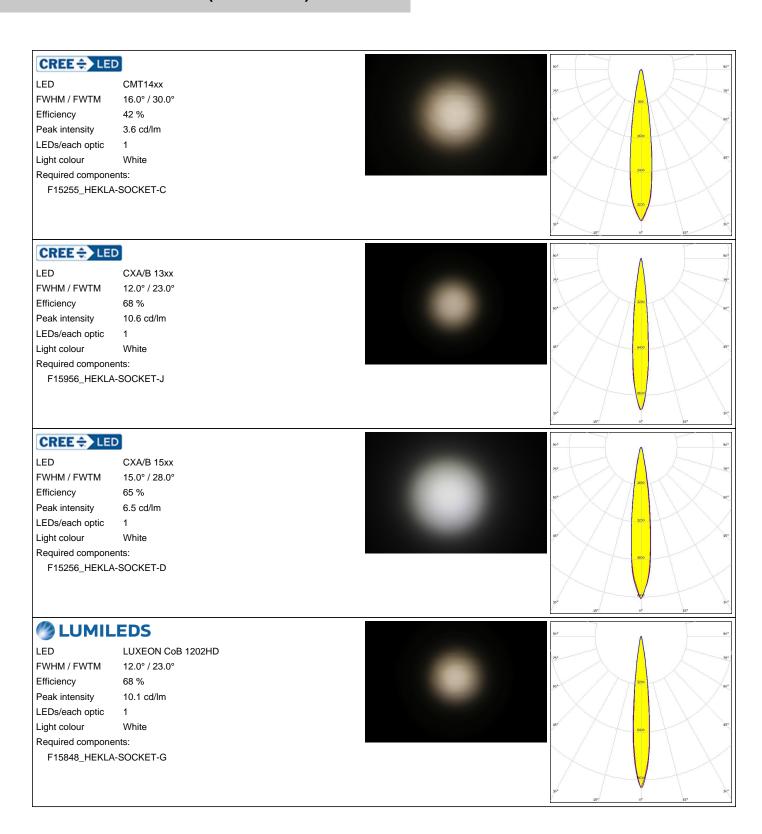

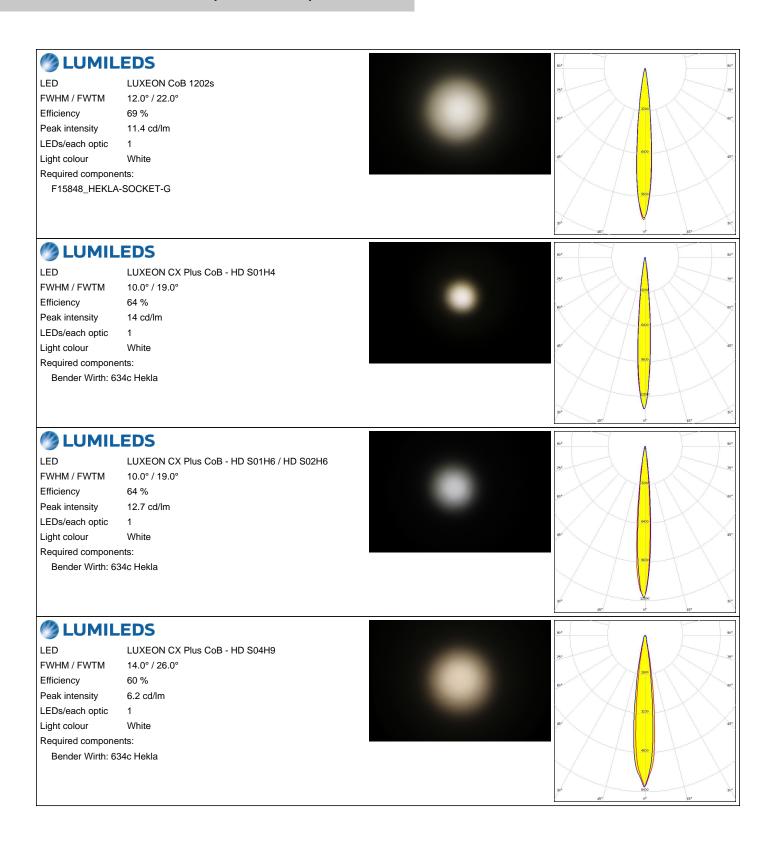

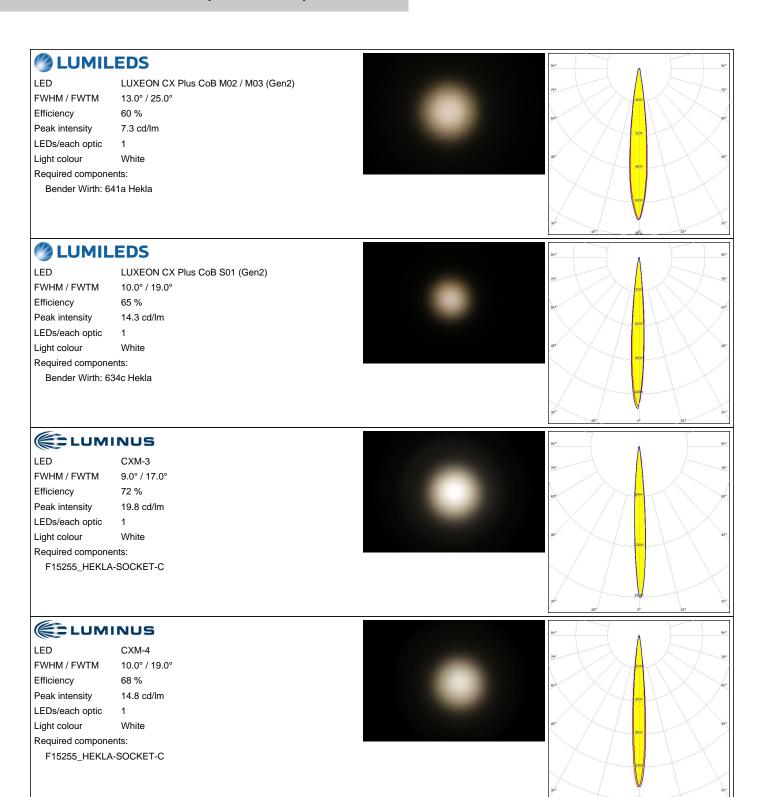






Light colour White Required components:

F15255_HEKLA-SOCKET-C





WNICHIA

LED COB S-Type (LES 7)

FWHM / FWTM 13.0° / 24.0°
Efficiency 67 %
Peak intensity 9.3 cd/lm
LEDs/each optic 1
Light colour White

F15848_HEKLA-SOCKET-G





PHILIPS


Required components:

LED Fortimo SLM L09 CoB

FWHM / FWTM 15.0° / 28.0°
Efficiency 64 %
Peak intensity 6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H






SAMSUNG

LED LC010C FWHM / FWTM 11.0° / 2:

FWHM / FWTM 11.0° / 22.0°
Efficiency 64 %
Peak intensity 9.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G








SAMSUNG

LED LC010C G2
FWHM / FWTM 11.0° / 21.0°
Efficiency 67 %
Peak intensity 12.6 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15255_HEKLA-SOCKET-C






SAMSUNG

LED LC020C
FWHM / FWTM 13.0° / 26.0°
Efficiency 64 %
Peak intensity 7.1 cd/lm
LEDs/each optic 1
Light colour. White

Light colour White
Required components:
F15848_HEKLA-SOCKET-G

۰




SAMSUNG

LED LC020C G2
FWHM / FWTM 15.0° / 27.0°
Efficiency 63 %
Peak intensity 6.3 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15859_HEKLA-SOCKET-I






TRIDONIC

LED SLE G7 LES09
FWHM / FWTM 15.0° / 27.0°
Efficiency 66 %
Peak intensity 6.5 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C

Required components:








TRIDONICLED SLE G7 LES13 FWHM/FWTM 20.0°/37.0°

Efficiency 56 %
Peak intensity 3 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15858_HEKLA-SOCKET-H





XICATO


LED XOB 6 mm
FWHM / FWTM 11.0° / 21.0°
Efficiency 66 %

Peak intensity 11.1 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C






XICATO

LED XOB 9.8 mm
FWHM / FWTM 15.0° / 28.0°
Efficiency 63 %
Peak intensity 6.1 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C





XICATO


LED XTM - 9mm LES FWHM / FWTM 15.0° / 28.0° Efficiency 60 %

Peak intensity 5.8 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C15743_XTM-ADAPTER-50-B







PHOTOMETRIC DATA (SIMULATED):



 LED
 V10 Gen7


 FWHM / FWTM
 16.0° / 30.0°

 Efficiency
 60 %

Peak intensity 5.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




bridgelux.

LED V6 Gen6
FWHM / FWTM 10.0° / 21.0°
Efficiency 66 %

Peak intensity 13 cd/lm LEDs/each optic 1 Light colour White

Required components:

F15253_HEKLA-SOCKET-A



bridgelux

 LED
 V8 Gen7


 FWHM / FWTM
 14.0° / 26.0°

 Efficiency
 63 %

 Peak intensity
 7.8 cd/lm

LEDs/each optic 1
Light colour White
Required components:


F15253_HEKLA-SOCKET-A



bridgelux.

LED VERO10
FWHM / FWTM 15.0° / 27.0°
Efficiency 61 %
Peak intensity 6.7 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15616_HEKLA-SOCKET-F



PHOTOMETRIC DATA (SIMULATED):




LED LUXEON CoB 1202/1203

FWHM / FWTM 14.0° / 28.0°
Efficiency 61 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H




LUMILEDS

LED LUXEON CoB 1204HD

FWHM / FWTM 16.0° / 28.0°
Efficiency 61 %
Peak intensity 6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H




ELUMINUS

LED CxM-6 (13.5x13.5) FWHM / FWTM 12.0° / 23.0°

Efficiency 65 %
Peak intensity 10.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C



WNICHIA

LED COB S-Type (LES 6)

FWHM / FWTM 13.0° / 25.0°

Efficiency 63 %


Peak intensity 8.7 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15848_HEKLA-SOCKET-G



Published: 02/01/2019



PHOTOMETRIC DATA (SIMULATED):

OSRAM


LED Soleriq S9 FWHM / FWTM 15.0° / 28.0°

Efficiency 59 %
Peak intensity 5.8 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




PHILIPS

LED Fortimo SLM L06 CoB

FWHM / FWTM 10.0° / 22.0°
Efficiency 53 %
Peak intensity 9.6 cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H





SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 16.0° / 30.0°
Efficiency 58 %
Peak intensity 5.2 cd/lm
LEDs/each optic 1

Light colour White Required components: F17435_HEKLA-G2-C






SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 16.0° / 30.0°
Efficiency 58 %
Peak intensity 5.3 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C





Published: 02/01/2019




PHOTOMETRIC DATA (SIMULATED):

SAMSUNG

LED LC010C
FWHM / FWTM 12.0° / 22.0°
Efficiency 64 %
Peak intensity 11.2 cd/lm
LEDs/each optic 1

Light colour White

Required components: F17435_HEKLA-G2-C

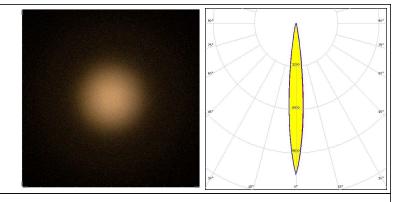

SAMSUNG

LED LH231B
FWHM / FWTM 15.0° / 28.0°
Efficiency 58 %
Peak intensity 6 cd/lm
LEDs/each optic 7
Light colour White

Required components:

F15255_HEKLA-SOCKET-C



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

16/16

www.ledil.com/ where_to_buy

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Lenses Assemblies category:

Click to view products by Ledil manufacturer:

Other Similar products are found below:

FCN12592_LE1-D-COP_CA16129_OLGA-W_CA16370_HB-SQ-W_FN15972_RONDA-ZT45-C_CS15759_HB-2X2MX-8-W_CA16435_LXP2-SS-WAS_CN16210_GABRIELLA-MIDI-W_CP17137_CARMEN-M2-C_CA16015_STRADA-SQ-SCL_CP17594_TINA-SC-RS_CS15767_HB-2X2MX-8-M_CP10960_RGBX-SS_CP12395_LXP3-W_CP12939_LARISA-RS-CLIP16_C14636_XTM-PF-ADAPTER_CA11819_STRADA-SQ-T-DW_CA14508_G2-LXP2-D_CA14601_VERONICA-SQ-MINI-RS_FCP13895_SEANNA-A_CP12943_LARISA-O-CLIP16_FP11124_LISA2-O-PIN_CS14597_HB-IP-2X6-O_CP14995_FLORENTINA-HLD-O_CS15158_STRADA-IP-2X6-T4-B_CS16323_STRADELLA-IP-28-HB-M_FN14976_STELLA-DWC2_FN15264_STELLA-HB-WWW_CA15584_ZORYA-MINI-TAPE_FA15229_ROSE-MRK-S_FA15232_ROSE-MRK-M_FA15233_ROSE-MRK-W_FCN13552_CRYSTAL-RS_FN15552_RONDA-W_FS15626_FLORENCE-3R-IP-Z90_FS15786_FLORENCE-3R-IP-Z60_FS15847_FLORENCE-3R-IP-O_CA14505_G2-LXP2-RS2-P_FCN12775_IRIS-O_CP15304_LARISA-RS-PIN_FN15679_RONDA-S_CA15519_VERONICA-SQ-MINI-D_FP14414_LISA2-O-PIN_LL01CR-DF60L06-M2_FN15993_RONDA-O_FN15977_RONDA-WAS2_CA14366_FLARE-MAXI-TAPE_CA14442_VERONICA-SQ-W_CA14509_G2-LXP2-M-P_CA15231_VERONICA-SQ-MINI-W_FP11002_LISA2-W-PIN_CA1520_LISA2-W-PIN_CA