

www.lemo.com

FGG.1B.302.CLAD52

SUMMARY

Wires

Low voltage 2



Image is for illustrative purpose only

Series 1B

Termination type Male solder

IP rating 50

AWG wire size 28.00 - 20.00

Cable Ø 4.30 - 5.20 mm

Status active

Matching parts EGG.1B.302.CLL

PHG.1B.302.CLLD52

Download

Request a quote

Eplan Catalog

See video assembly instructions

TECHNICAL DETAILS

Mechanics

Shell Style/Model FG*: Straight plug, cable collet

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 15.26 g

Performance

Configuration 1B.302 : 2 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 15 Amps

Specifications

Contact Type: Solder

Contact Dia.: 1.3 mm (0.051in) Bucket Dia.: 1 mm (0.039in)

Max. Solid Conductor: 0.5 mm² (AWG 20) Max. Stranded Conductor: 0.5 mm² (AWG 20)

R (max): 3.6 mOhm

Vtest (contact-shell): 1350 V (AC), 1910 V (DC) Vtest (contact-contact): 1500 V (AC), 2120 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others


Endurance (Shell): 5000

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

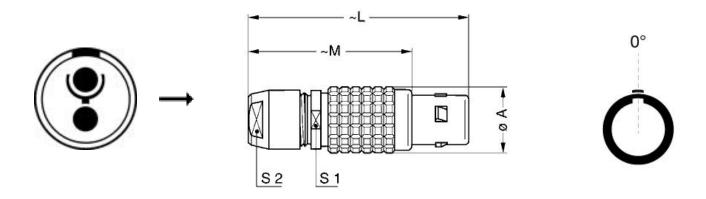

Dimensions

	А	L	M	S 1	S2
mm.	12	43	32	10	9
in.	0,47	1,69	1,26	0,39	0,35

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1B.015.PA090
Caps: BFG.1B.100.PCSG

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Cables

CMN.02.T20.047PGZE		Grey	-
CMN.02.T20.047PNZE			= =
CMN.02.T20.048QGZE	TPR (medical)	Grey	-
120240	PVC	Black	
120250	PVC	Grey	-
120501	PVC	Grey	-
2221	PVC	Black	
4082	PVC	Grey	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z FHG.1B.303.CYCZ PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z FHG.1B.303.CYCD62 FLC.00.250.CTAC31 PCS.01.250.DLLE31