



LEOPARD IMAGING INC

LI-CAM-IMX224-MIPI

Data Sheet

Features

- Diagonal 6.09mm (Type 1/3) CMOS Solid-state image sensor
- Number of recommended recording pixels: 1280 H x 960 V
- Pixel size: 3.75 μ m x 3.75 μ m
- MIPI interface
- Maximum frame rate in Quad VGA mode: 120 frame / s
- Wide dynamic range (WDR)
Multiple exposure WDR
Digital overlap WDR
- Variable-speed shutter function
- 10-bit / 12-bit A/D converter
- Conversion gain switching (HCG Mode / LCG Mode)
- CDS /PGA function
- Direct interface to TI DM385 IPNC




Default Lens Specification

- Model: 6016-650-54
- Image format: 1/3"
- Focal length: 6.0 mm
- Aperture, F/#: 1.6
- Back focal length: 8.3 mm
- Flange back length: 8.12 mm
- Built in IR cut filter
- FOV (D): 54 °
- Thread size: M12 x 0.5P

Application

- Digital video camera development
- High resolution surveillance IP network camera
- High resolution video conference camera

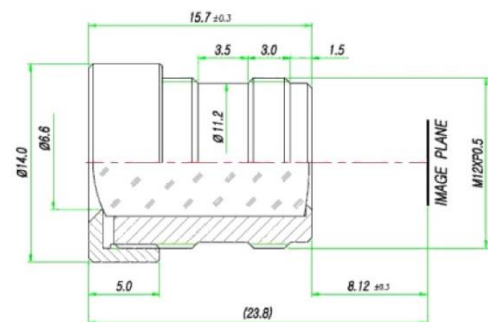

Leopard Imaging Inc.

1130 Cadillac Ct., Milpitas, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com
www.leopard-security.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cameras & Camera Modules](#) category:

Click to view products by [Leopard Imaging](#) manufacturer:

Other Similar products are found below :

[FH-SC](#) [CAMOV5645](#) [73-540-420I](#) [Web Camera module 5.0M pixel](#) [LI-IMX424-GMSL2-070H](#) [73-951-0046](#) [73-954-0001T](#) [73-961-0005](#)
[1202](#) [1203](#) [73-961-0003](#) [73-961-0012](#) [107139](#) [106983](#) [107115](#) [107149](#) [107142](#) [82535IVCHVM](#) [107140](#) [107113](#) [107112](#) [107141](#) [107147](#)
[107148](#) [107110](#) [107150](#) [107145](#) [107111](#) [OKY3553](#) [10299](#) [10300](#) [11388](#) [613](#) [EP-DCINTELD-415](#) [1386](#) [4321](#) [4561](#) [43203](#) [104002](#)
[105716](#) [105993](#) [107206](#) [107645](#) [107646](#) [107655](#) [108010](#) [108172](#) [108173](#) [CLEO-CAM1](#) [107114](#)