


LRB551BS-30T5G

S-LRB551BS-30T5G

Schottky barrier diode



1. FEATURES

- Small surface mounting type.
- Ultralow VF ($VF = 0.45V$ Typ. at 0.5A)
- High reliability.
- We declare that the material of product compliance with RoHS requirements.
- S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

2. APPLICATIONS

- High-frequency rectification
- Switching regulators



3. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LRB551BS-30T5G	X	10000/Tape&Reel




4. MAXIMUM RATINGS($T_a = 25^\circ C$)

Parameter	Symbol	Limits	Unit
Repetitive Peak Reverse Voltage	VRRM	30	V
Maximum DC Blocking Voltage	VR	30	V
Average Forward Rectified Current	IF(AV)	500	mA
Peak forward surge current 10ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	3	A
Repetitive peak forward current ($t_p \leq 1\text{ms}, \delta \leq 0.25$)	IFRM	1	A
Total Power Dissipation	PD	200	mW
Typical thermal resistance	R _{θJA}	500	°C/W
Storage and Operating Temperature Range	T _{j,TSTG}	-65~+150	°C

5. ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)


Parameter	Symbol	Min.	Typ.	Max.	Unit
Forward voltage	IF = 0.1mA	VF1	-	-	V
	IF = 1mA	VF2	-	-	V
	IF = 10mA	VF3	-	-	V
	IF = 100mA	VF5	-	-	V
	IF = 500mA	VF6	-	-	V
Reverse current	VR=10V	IR	-	-	μA
Reverse breakdown voltage	IR = 500μA	VBR	30	-	V
Capacitance	VR=1V, f=1MHz	C _j	-	-	pF

6. ELECTRICAL CHARACTERISTICS CURVES

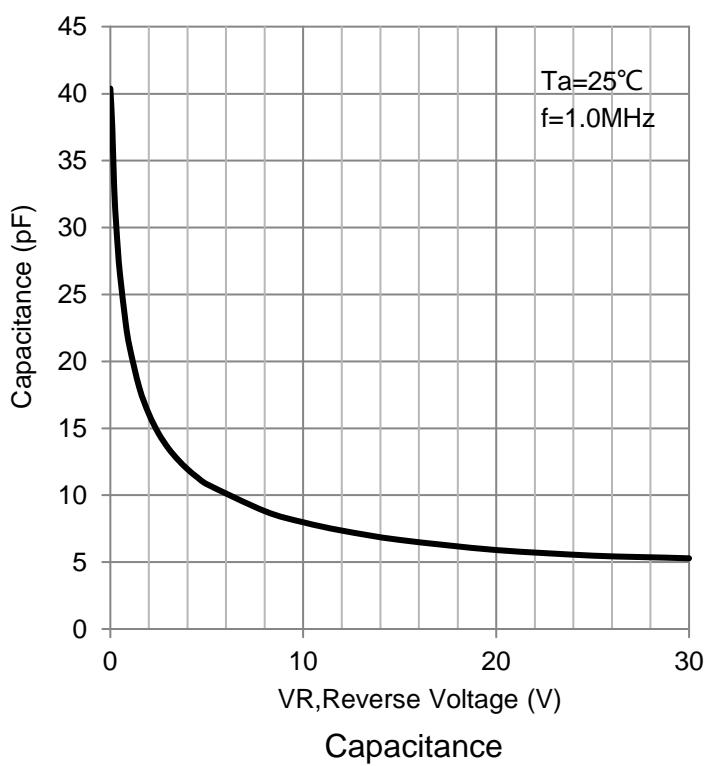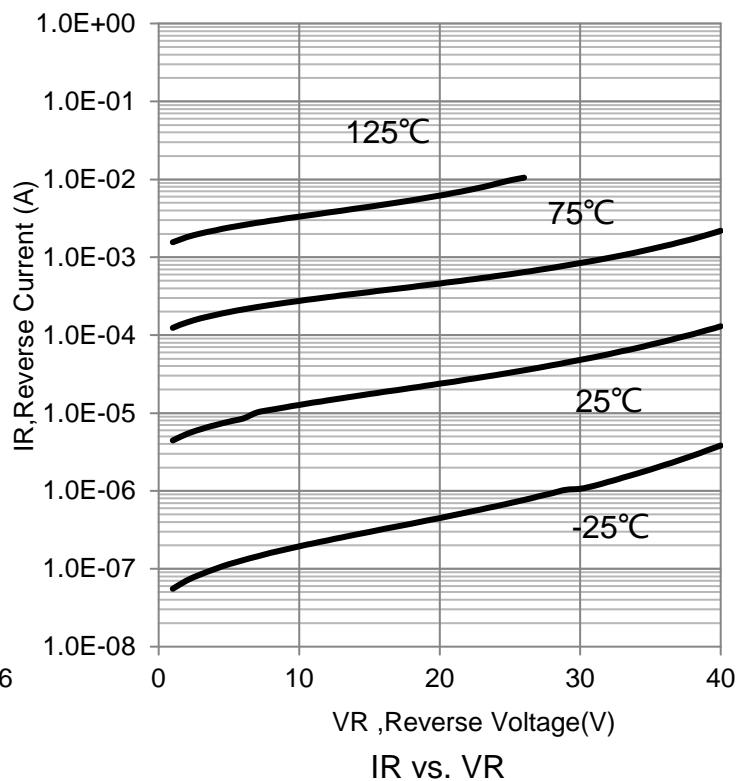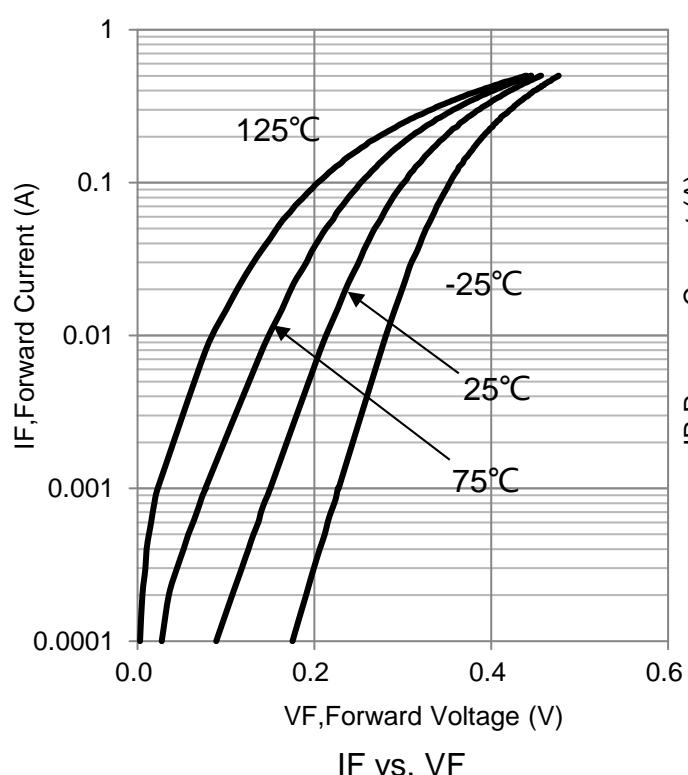

7.OUTLINE AND DIMENSIONS


SOD882

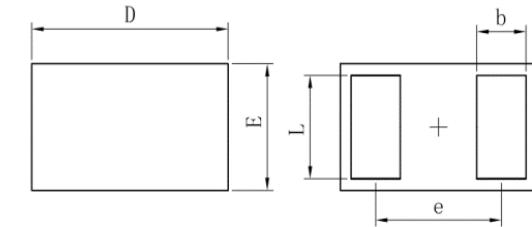

TOP VIEW


BOTTOM VIEW

SOD882			
Dim	Min	Typ.	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
e	-	0.64	-
L	0.44	0.49	0.54
b	0.20	0.25	0.30
A	0.43	0.48	0.53
A1	0	-	0.05
A3	0.127REF.		
All Dimensions in mm			



SIDE VIEW

8.SOLDERING FOOTPRINT

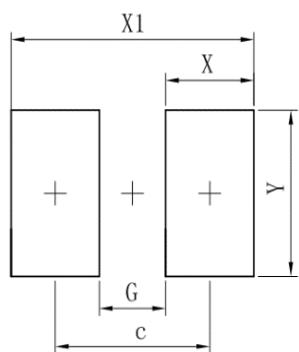

Dimensions	(mm)
c	0.70
G	0.30
X	0.40
X1	1.10
Y	0.70

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Leshan manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#)
[BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#)
[NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [JANTX1N5712-1](#)
[SB007-03C-TB-E](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#)
[MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#)