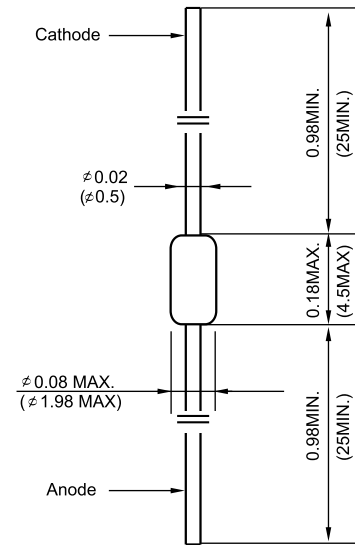


VOLTAGE RANGE: 28-45 V
DO-35


Features

- ◇ The three layer,two terminal,axial lead,hermetically sealed diacs are designed specifically for triggering thyristors.They demonstrate low breakover current at breakover voltage as they withstand peak pulse current,The breakover symmetry is within three volts(DB3,DB4). These diacs are intended for use in thyristors phase control,circuits for lamp dimming, universal motor speed control,and heat control.

ABSOLUTE RATINGS

Dimensions in inches and (millimeters)

Parameters	Symbols	DB3,DB4	UNITS
Power dissipation on printed $T_A=50^{\circ}\text{C}$ circuit (L=10mm)	P_c	150.0	mW
Repetitive peak on-state current $t_p=20\ \mu\text{S}$ $f=120\text{Hz}$	I_{TRM}	2.0	A
Operating junction temperature	T_J	-40--- +125	$^{\circ}\text{C}$
Storage temperature	T_{STG}	-40--- +125	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

Parameters	Test Conditions	DB3	DB4	UNITS	
Breakover voltage (NOTE 1)	$C=22\text{nf}$ (NOTE 2) See FIG.1	Min	28	35	V
		Typ	32	40	
		Max	36	45	
Breakover voltage symmetry	$C=22\text{nf}$ (NOTE 2) See FIG.1	Max	± 3.0		V
Dynamic breakover voltage (NOTE 1)	$\Delta I=(I_{BO}\text{ to }I_F=10\text{mA})$ See FIG.1	Min	5.0		V
Output voltage (NOTE 1)	See FIG.2	Min	5.0		V
Breakover current (NOTE 1)	$C=22\text{nf}$ (NOTE 2)	Max	100.0		μA
Rise time (NOTE 1)	See FIG.3	Typ	1.5		μS
Leakage current (NOTE 1)	$V_R=0.5V_{BO}$ See FIG.1	Max	10.0		μA

NOTE: 1.Electrical characteristics applicable in both forward and reverse directions.

2.Connected in parallel with the devices

Ratings and Characteristic Curves

FIG.1-VOLTAGE-CURRENT CHARACTERISTIC CURVE

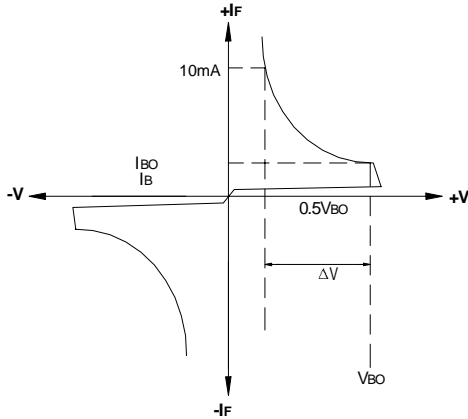


FIG.2-TEST CIRCUIT FOR OUTPUT VOLTAGE




FIG.3- TEST CIRCUIT SEE FIG.2 ADJUST R FOR $I_P=0.5A$

FIG.4-POWER DISSIPATION VERSUS AMBIENT TEMPERATURE (MAXIMUM VALUES)




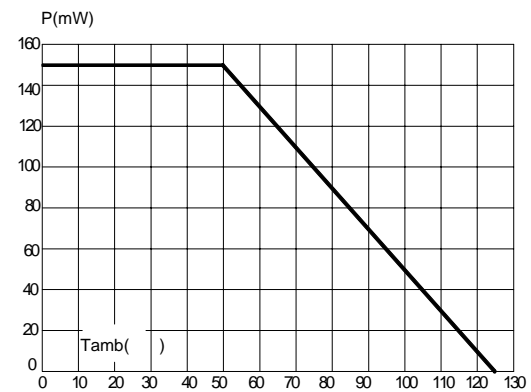


FIG.5-RELATIVE VARIATION OF V_{BO} VERSUS JUNCTION TEMPERATURE(TYPICAL VALUES)

FIG.6-PEAK PULSEE CURRENT VERENT VERSUS PULSE DURATION(MAXIMUM VALUES)

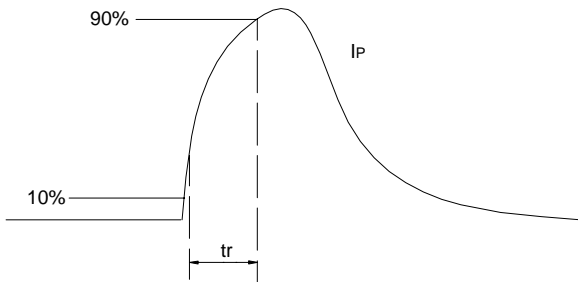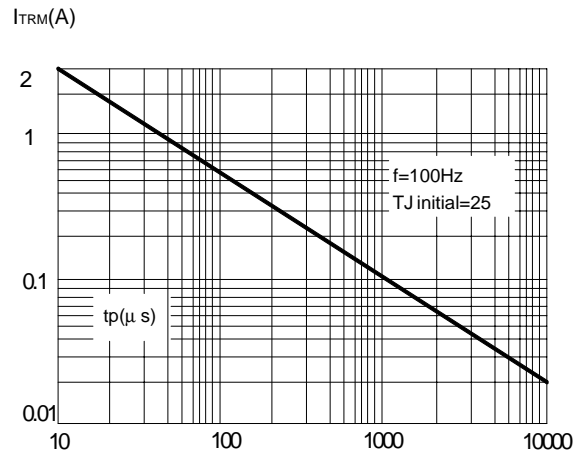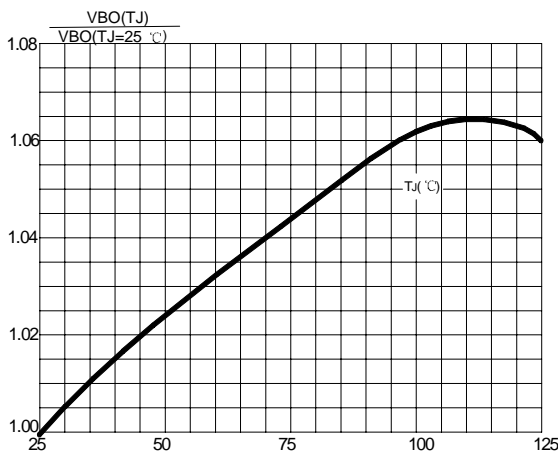

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-35	5000/AMMO	100000	41X28.5X38	14.57	13.07

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diacs](#) category:

Click to view products by [LGE](#) manufacturer:

Other Similar products are found below :

[DB3](#) [LLDB3](#) [DB3](#) [DB3PF](#) [DB3W](#) [DB4](#) [DLDB3](#) [DB3](#) [NTE6407](#) [DB3TG](#) [DB3](#) [DB4](#) [DB4](#) [NTE6412](#) [DB3-22](#) [LLDB3](#) [DB4](#) [NTE6408](#)
[NTE6411](#) [BEP0080SB](#) [BEP0300SC](#) [BEP3500SB](#) [BR100-03LLD](#) [BR100-04LLD](#) [2SC2983](#) [DB31](#) [DB32](#) [DB6](#) [DC34](#) [DB3](#) [DB3W](#) [DB3](#)
[K150SAW](#) [K150](#) [SODDB3](#) [DB3](#) [DB4](#) [SMDB3](#) [TMMDB3](#) [TMMDB3TG](#)