



LED Display Product Data Sheet LTP-2757AA

Spec No.: DS-30-97-109

Effective Date: 02/19/2001

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

FEATURES

- * 2 inch (50.8 mm) MATRIX HEIGHT.
- * LOW POWER REQUIREMENT.
- * SINGLE PLANE, WIDE VIEWING ANGLE
- * SOLID STATE RELIABILITY.
- * 5x7 ARRAY WITH X-Y SELECT.
- * COMPATIBLE WITH USASCLL AND EBCDIC CODES.
- * STACKABLE HORIZONTALLY.
- * CATEGORIZED FOR LUMINOUS INTENSITY.


DESCRIPTION

The LTP-2757AA is a 2 inch (50.8 mm) matrix height 5x7 dot matrix display. This device is multicolor applicable display, which has gray face and white dot color. The red orange LED chips are made from GaAsP on a transparent GaP substrate. The green LED chips are made from GaP on a transparent GaP substrate.

DEVICE


PART NO.	DESCRIPTION
Red Orange & Green	Cathode Column
LTP-2757AA	Anode Row

PACKAGE DIMENSIONS

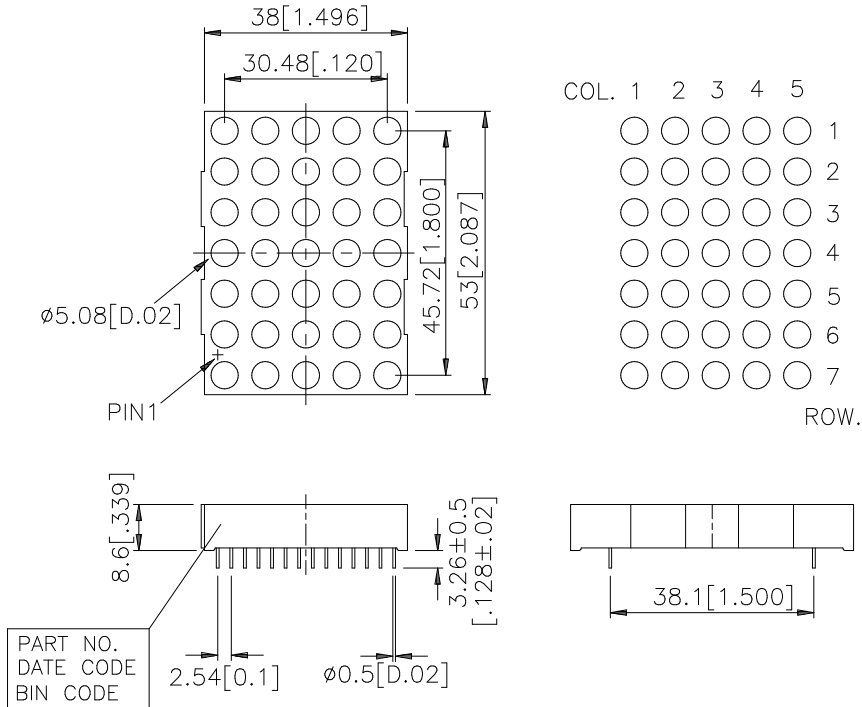

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

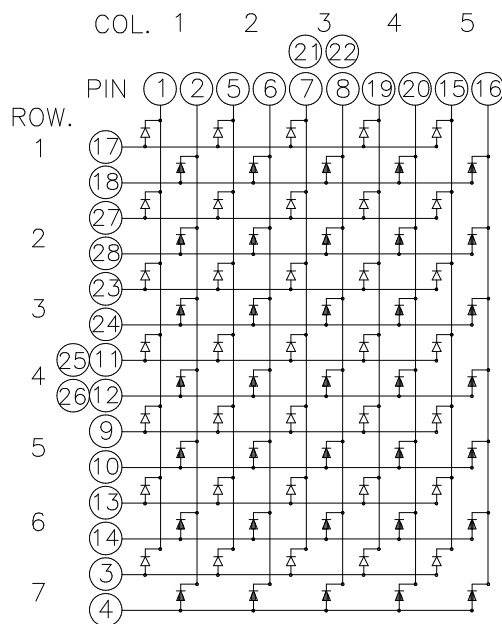

PIN CONNECTION

NO.	CONNECTION	NO.	CONNECTION
1	CATHODE COLUMN 1 (GREEN)	15	CATHODE COLUMN 5 (GREEN)
2	CATHODE COLUMN 1 (RED ORANGE)	16	CATHODE COLUMN 5 (RED ORANGE)
3	ANODE ROW 7 (GREEN)	17	ANODE ROW 1 (GREEN)
4	ANODE ROW 7 (RED ORANGE)	18	ANODE ROW 1 (RED ORANGE)
5	CATHODE COLUMN 2 (GREEN)	19	CATHODE COLUMN 4 (GREEN)
6	CATHODE COLUMN 2 (RED ORANGE)	20	CATHODE COLUMN 4 (RED ORANGE)
7	CATHODE COLUMN 3 (GREEN)	21	CATHODE COLUMN 3 (GREEN)
8	CATHODE COLUMN 3 (RED ORANGE)	22	CATHODE COLUMN 3 (RED ORANGE)
9	ANODE ROW 5 (GREEN)	23	ANODE ROW 3 (GREEN)
10	ANODE ROW 5 (RED ORANGE)	24	ANODE ROW 3 (RED ORANGE)
11	ANODE ROW 4 (GREEN)	25	ANODE ROW 4 (GREEN)
12	ANODE ROW 4 (RED ORANGE)	26	ANODE ROW 4 (RED ORANGE)
13	ANODE ROW 6 (GREEN)	27	ANODE ROW 2 (GREEN)
14	ANODE ROW 6 (RED ORANGE)	28	ANODE ROW 2 (RED ORANGE)

ABSOLUTE MAXIMUM RATING AT T_A=25°C

PARAMETER	GREEN	RED ORANGE	UNIT
Average Power Dissipation Per Dot	36		mW
Peak Forward Current Per Dot	100		mA
Average Forward Current Per Dot	13		mA
Derating Linear From 25°C Per Dot	0.17		mA/°C
Reverse Voltage Per Dot	5		V
Operating Temperature Range	-35°C to +85°C		
Storage Temperature Range	-35°C to +85°C		
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260°C			

ELECTRICAL / OPTICAL CHARACTERISTICS AT T_A=25°C

GREEN

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _v	1500	4800		μcd	I _p =80mA 1/16DUTY
Peak Emission Wavelength	λ _p		565		nm	I _F =20mA
Spectral Line Half-Width	Δλ		30		nm	I _F =20mA
Dominant Wavelength	λ _d		569		nm	I _F =20mA
Forward Voltage any Dot	V _F		2.1	2.6	V	I _F =20mA
			3	3.7	V	I _F =80mA
Reverse Current any Dot	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _p =80mA 1/16DUTY

RED ORANGE

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _v	1500	4800		μcd	I _p =80mA 1/16DUTY
Peak Emission Wavelength	λ _p		630		nm	I _F =20mA
Spectral Line Half-Width	Δλ		40		nm	I _F =20mA
Dominant Wavelength	λ _d		621		nm	I _F =20mA
Forward Voltage any Dot	V _F		2	2.6	V	I _F =20mA
			2.6	3.4	V	I _F =80mA
Reverse Current any Dot	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _p =80mA 1/16DUTY

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

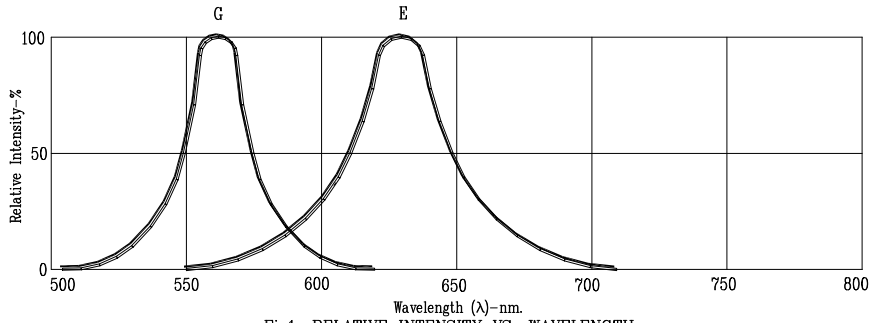


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)




Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig5. MAX AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE.




Fig6. MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE: G=GREEN & E=RED ORANGE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Displays & Accessories](#) category:

Click to view products by [Lite-On](#) manufacturer:

Other Similar products are found below :

[LTC-4624JD](#) [LTC-4627WC](#) [LTC-571P](#) [LTM-8522G](#) [LTP-4323P](#) [LTP-747G](#) [LTS-3361JG-06](#) [1668](#) [HT-F196NB-5323](#) [IPD2131-27](#) [SA03-12EWA](#) [LDQ-N514RI](#) [LDS-A3506RD](#) [LDS-A3926RI](#) [SC03-12HDB](#) [SI-B9T151550WW](#) [SI-B9V171550WW](#) [SLC-3PF-WL](#) [SLDN-32M-G1624](#) [LTC-2621JD](#) [LTC-2623WC](#) [LTC-4627JD](#) [LTD-322G](#) [LTD-482PC](#) [LTP-1057AHR](#) [LTP-1457AKR](#) [LTP-3784G-01](#) [LTS-313AP](#) [LTS-4812SKR-P](#) [LTS-547AE](#) [LTS-6780P](#) [446010401-3](#) [HV-7W30-6829](#) [DA43-11GWA](#) [LDD-A516RI-17](#) [LDD-E305RI](#) [LDQ-N3402RI](#) [LDQ-N3606RI](#) [LDT-M2804RI](#) [86004CB830](#) [LTP-3862JD](#) [LTP-2088AKD](#) [LTD-6740P](#) [LTS-6880Y](#) [LDS-SMC3002RISUGTR](#) [LTC-2623E](#) [CC25-12YWA](#) [LDM-6432-P3-UR-1](#) [SR420312N/32](#)