

# AUTO LINK PAL FUSES - 2935

RoHS



## Description


PAL fuses are commonly found on many Japanese and domestic built vehicles.

## Ratings

Part Number	Current Rating (A)	Body Color
0293525._	25	LIGHT BROWN
0293530._	30	LIGHT GREEN
0293545._	45	RED
0293565._	65	BLACK
0293575._	75	GRAY

## Dimensions (25A - 30A)

Dimensions in mm

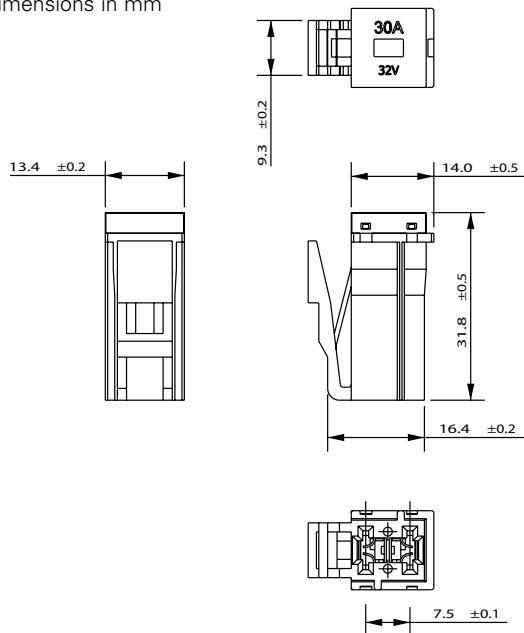

## Specifications

Voltage Rating: 32 VDC  
 Current Cycling: 24°C  
 The fuses satisfy the performance requirements after 50% of the rated current is applied for 10,000 cycles. Each cycle consists of an interrupted current with the pattern of 5 minutes ON and 10 minutes OFF.  
 Operating Temperature Range: -40°C to +125°C

Complies with JASO 0612

## Ordering Information


Part Number	Package Size
02935xx.H	100
02935xx.U	500
02935xx.MXJ	1000

## Time-Current Characteristics

% of Rating	Opening Time Min / Max (s)	
	25A - 30A	45A - 75A
110	- / -	14,400 s
150	- / -	100 s
200	5 s / 70 s	2 s / 60 s
300	- / 6 s	- / 5 s
600	- / 3 s	- / 2 s

## Dimensions (45A - 75A)

Dimensions in mm

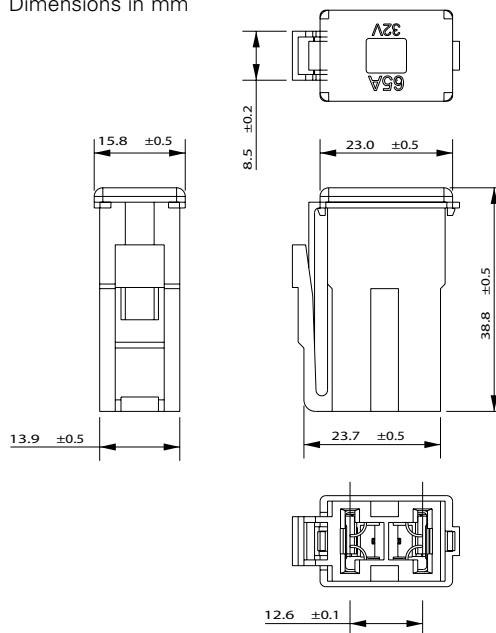

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Fuses](#) category:*

*Click to view products by [Littelfuse](#) manufacturer:*

Other Similar products are found below :

[ATM-4LP](#) [299080](#) [HBO-70](#) [0287015](#) [FMM-15](#) [0297003.WXT](#) [0695060.PXPS](#) [MRBF-075](#) [MRBF-300](#) [MRBF-200](#) [ANX80-UL-20A](#)  
[ANX80-UL-25A](#) [ANX80-UL-30A](#) [ANX80-UL-35A](#) [ANX80-UL-40A](#) [ANT-I-3A](#) [APM-I-25A](#) [APR-10A](#) [APR-25A](#) [ANX58-UL-20A](#)  
[ANX58-UL-25A](#) [ANX58-UL-35A](#) [ANX58-UL-40A](#) [ANX58-UL-50A](#) [ANM-4A](#) [ANM-25A](#) [ANE-175A](#) [APM-25A](#) [APM-4A](#) [ACB2-PL-](#)  
[15A](#) [ACB2-PL-25A](#) [ANM58-15A](#) [ANM58-5A](#) [FMX-LP-20A](#) [MIDA-50A](#) [0695040.PXP](#) [0327030.YX2T](#) [0298500.UX1M8](#) [0299070.ZXT](#)  
[20A32V](#) [ATM-1](#) [MRBF-040](#) [MRBF-100](#) [MRBF-250](#) [MRBF-050](#) [MRBF-060](#) [CFCOVER-2R](#) [MRBF-030](#) [3298600.ZXM10](#) [AMG-80](#)