# High Voltage Fuses





Low Current High Voltage 50A Fuses

# Low Current High Voltage 50A Fuse

The LC HEV fuse is designed for protection of high-voltage accessory circuits in electric and hybrid electric vehicles.

## **Specifications**

Voltage Rating (50A): Interrupting Rating (50A): Operating Temperature Range: 275 VAC

10,000A @ 275 VAC -40°C to +125°C

## **Ordering Information**

Part Number	Termination	Package Size
0HEVxxx.ZXC2	Cartridge	240
0HEVxxx.ZXIS02	Bolt Down (ISO)	240
0HEVxxx.ZXP2Y	Blade	240
0HEVxxx.ZXPCB2	PCB Mount	240
0HEVxxx.ZXPCBL2	PCB Mount (Long)	240
0HEVxxx.ZXBD2	Bolt Down (Axial)	240


## **Time-Current Characteristics**

% of Rating	Opening Time Min / Max (s)
100	100 hrs / -
110	4 hrs / -
135	-
150	-
200	0.5 / 100
300	0.1 / 15
500	0.05 / 1


## Ratings

Part Number	Current Rating (A)	Voltage Rating (VAC)	Color Code	Typical Voltage Drop at 70% I <sub>R</sub> (mV)	Maximum Voltage Drop Spec at 100% I <sub>R</sub> (mV)	Typical Cold Resistance $(m\Omega)$	Minimum Melting l²t (A²s)
0HEV050.XXX	50	275		57	200	1.2	1495

## Time-Current Characteristic Curves

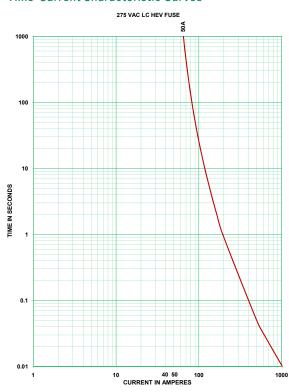

## Temperature Rerating Curve

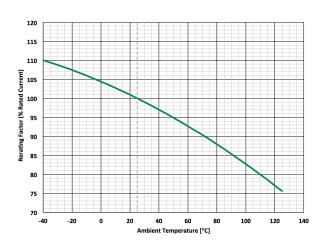

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for admages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

# High Voltage Fuses



# Low Current High Voltage 50A Fuse


## **Dimensions**

Dimensions in mm


## ZXC2 Cartridge




#### ZXIS02 Bolt Down (IS0)

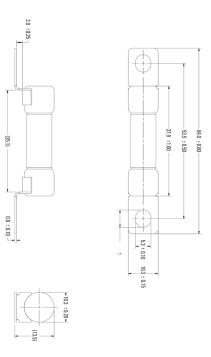


## ZXP2Y Blade

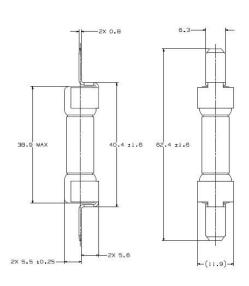


#### **ZXPCB2 PCB Mount**

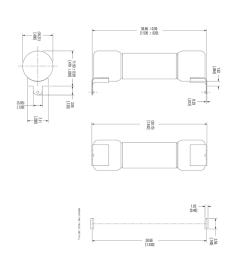

## ZXPCBL2 PCB Mount (Long)

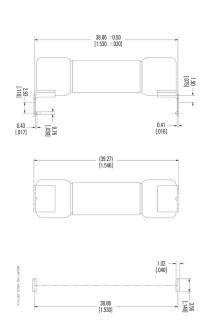

## ZXBD2 Bolt Down (Axial)

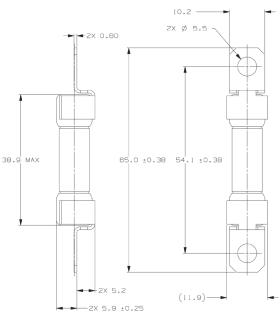

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Fuses category:

Click to view products by Littelfuse manufacturer:

Other Similar products are found below:

AFX-150 AT-10 AT-30 AT-5 ATM-4LP 299080 AT-20 AT-3 0287015 142.7010.5502 0MIN015.HXGLO 0695030.PXPS 0695040.PXPS 0297003.WXT 0MIN025.HXGLO 0MIN030.HXGLO 0695025.PXPS 0695015.PXPS 0695050.PXPS 0695060.PXPS 0695040.PXPS 0695040.