

AQHVxx-01LTG-C Series, 300W Discrete Bidirectional TVS Diode     



Description

This AQHVxx-01LTG-C series provides a highly effective ESD, EFT, and lightning surge protection component. It is ideally suited for power interfaces, passenger charging interfaces, LED lighting modules, and low speed I/Os.

Its rating of $\pm 30\text{kV}$ ESD exceeds the maximum ESD rating requirements as defined in the IEC 61000-4-2 international standard without suffering any performance degradation. The AQHV12-C can withstand up to 10A of surge current as defined by IEC 61000-4-5 2nd edition providing low voltage clamping levels during lightning induced events.

Pinout




This component is bidirectional

Features

- ESD, IEC 61000-4-2, $\pm 30\text{kV}$ contact, $\pm 30\text{kV}$ air
- EFT, IEC 61000-4-4, 40A (5/50ns)
- Lightning, 10A (8/20 μs as defined in IEC 61000-4-5 2nd edition) for AQHV12-C
- Low clamping voltage
- PPAP capable
- Low leakage current
- AEC-Q101 qualified
- Moisture Sensitivity Level(MSL -1)
- Halogen free, lead free and RoHS compliant

Functional Block Diagram



Applications

- LED Lighting Modules
- Portable Instrumentation
- General Purpose I/O
- RS232 / RS485
- CAN and LIN Bus
- Automotive application

Life Support Note:

Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
P_{pk}	Peak Pulse Power ($t_p=8/20\mu s$)	300	W
T_{OP}	Operating Temperature	-40 to 150	°C
T_{STOR}	Storage Temperature	-55 to 150	°C

Notes:

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.

AQHV12-C Electrical Characteristics ($T_{OP}=25^\circ C$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Reverse Standoff Voltage	V_{RWM}	$I_R=1\mu A$			12	V
Breakdown Voltage	V_{BR}	$I_R=1mA$	13.3	15		V
Reverse Leakage Current	I_{LEAK}	$V_R=12V$		5	50	nA
Clamp Voltage ¹	V_C	$I_{PP}=1A, t_p=8/20\mu s, I/O$ to I/O		18	21	V
		$I_{PP}=10A, t_p=8/20\mu s, I/O$ to I/O		27	30	V
Dynamic Resistance ²	R_{DYN}	TLP, $t_p=100ns, I/O$ to I/O		0.34		Ω
Peak Pulse Current ¹	I_{PP}	$t_p=8/20\mu s$			10	A
ESD Withstand Voltage ¹	V_{ESD}	IEC 61000-4-2 (Contact Discharge)	± 30			kV
		IEC 61000-4-2 (Air Discharge)	± 30			kV
Diode Capacitance ¹	$C_{I/O-I/O}$	Reverse Bias=0V, f=1MHz		27	30	pF

AQHV15-C Electrical Characteristics ($T_{OP}=25^\circ C$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Reverse Standoff Voltage	V_{RWM}	$I_R=1\mu A$			15	V
Breakdown Voltage	V_{BR}	$I_R=1mA$	16.7	19.5		V
Reverse Leakage Current	I_{LEAK}	$V_R=15V$		5	50	nA
Clamp Voltage ¹	V_C	$I_{PP}=1A, t_p=8/20\mu s, I/O$ to I/O		23.5	27	V
		$I_{PP}=7A, t_p=8/20\mu s, I/O$ to I/O		33.5	37	V
Dynamic Resistance ²	R_{DYN}	TLP, $t_p=100ns, I/O$ to I/O		0.36		Ω
Peak Pulse Current ¹	I_{PP}	$t_p=8/20\mu s$			7	A
ESD Withstand Voltage ¹	V_{ESD}	IEC 61000-4-2 (Contact Discharge)	± 30			kV
		IEC 61000-4-2 (Air Discharge)	± 30			kV
Diode Capacitance ¹	$C_{I/O-I/O}$	Reverse Bias=0V, f=1MHz		21	24	pF

AQHV24-C Electrical Characteristics ($T_{OP}=25^\circ C$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Reverse Standoff Voltage	V_{RWM}	$I_R=1\mu A$			24.0	V
Breakdown Voltage	V_{BR}	$I_R=1mA$	26.7	29.5		V
Reverse Leakage Current	I_{LEAK}	$V_R=24V$		5	50	nA
Clamp Voltage ¹	V_C	$I_{PP}=1A, t_p=8/20\mu s, I/O$ to I/O		35.5	40	V
		$I_{PP}=5A, t_p=8/20\mu s, I/O$ to I/O		49.5	55	V
Dynamic Resistance ²	R_{DYN}	TLP, $t_p=100ns, I/O$ to I/O		0.52		Ω
Peak Pulse Current ¹	I_{PP}	$t_p=8/20\mu s$			5.0	A
ESD Withstand Voltage ¹	V_{ESD}	IEC 61000-4-2 (Contact Discharge)	± 25			kV
		IEC 61000-4-2 (Air Discharge)	± 30			kV
Diode Capacitance ¹	$C_{I/O-I/O}$	Reverse Bias=0V, f=1MHz		15	17	pF

AQHV36-C Electrical Characteristics (T_{OP}=25°C)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Reverse Standoff Voltage	V _{RWM}	I _R =1μA			36.0	V
Breakdown Voltage	V _{BR}	I _R =1mA	40	43.5		V
Reverse Leakage Current	I _{LEAK}	V _R =36V		5	50	nA
Clamp Voltage ¹	V _C	I _{pp} =1A, t _p =8/20μs, I/O to I/O		52.5	58	V
		I _{pp} =3A, t _p =8/20μs, I/O to I/O		67	72	V
Dynamic Resistance ²	R _{DYN}	TLP, t _p =100ns, I/O to I/O		1.27		Ω
Peak Pulse Current ¹	I _{pp}	t _p =8/20μs			3.0	A
ESD Withstand Voltage ¹	V _{ESD}	IEC 61000-4-2 (Contact Discharge)	±15			kV
		IEC 61000-4-2 (Air Discharge)	±20			kV
Diode Capacitance ¹	C _{I/O-I/O}	Reverse Bias=0V, f=1MHz		11.5	13	pF

Note:


¹ Parameter is guaranteed by design and/or component characterization.

² Transmission Line Pulse (TLP) with 100ns width, 2ns rise time, and average window t1=70ns to t2= 90ns


Capacitance vs. Reverse Bias

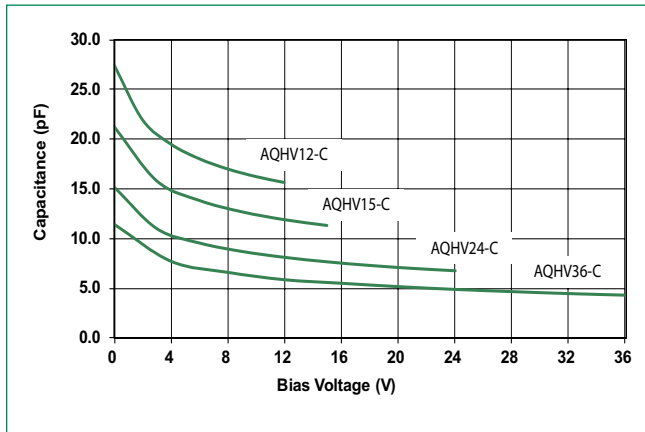


8/20μs Pulse Waveform

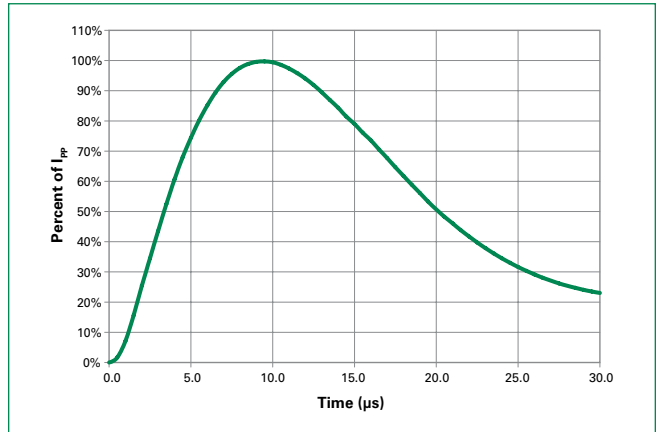


AQHV12-C Positive Transmission Line Pulsing (TLP) Plot

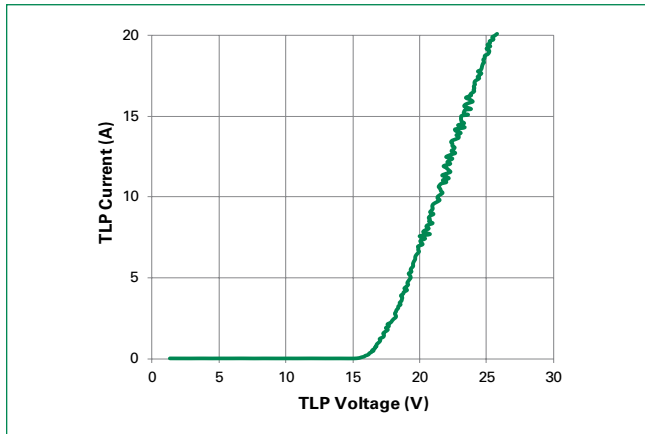


AQHV12-C Negative Transmission Line Pulsing (TLP) Plot

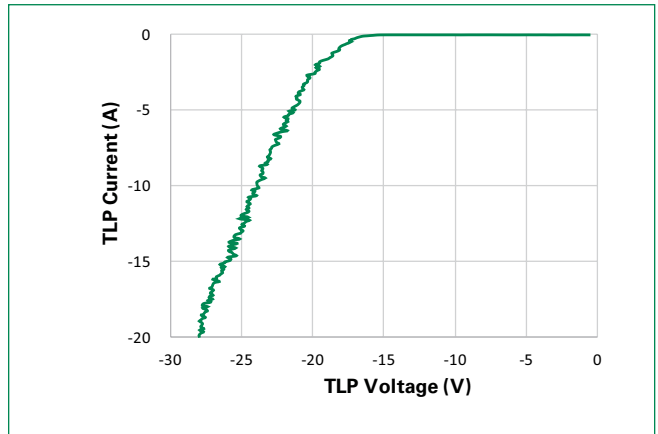


AQHV15-C Positive Transmission Line Pulsing(TLP) Plot

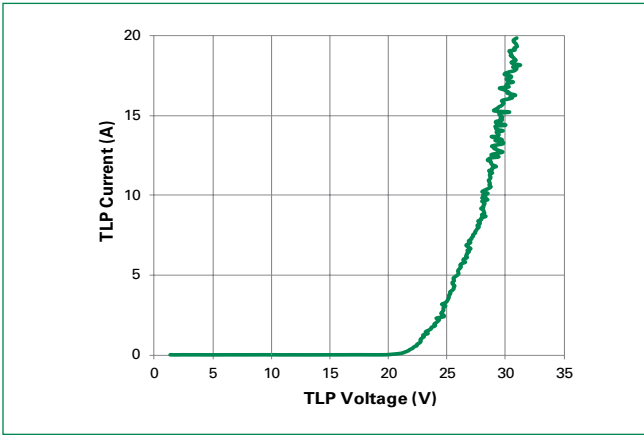


AQHV15-C Negative Transmission Line Pulsing(TLP) Plot

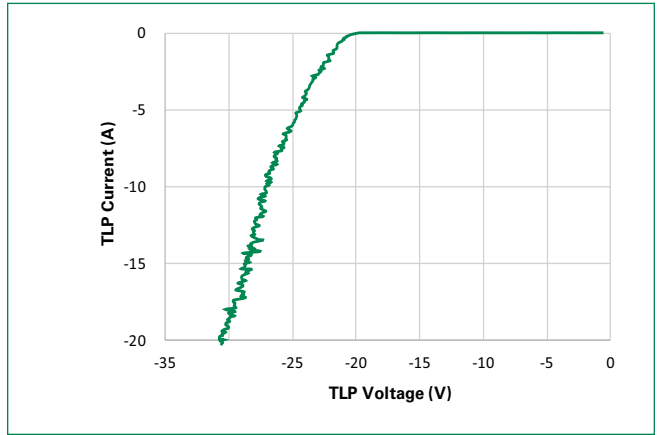


AQHV24-C Positive Transmission Line Pulsing(TLP) Plot

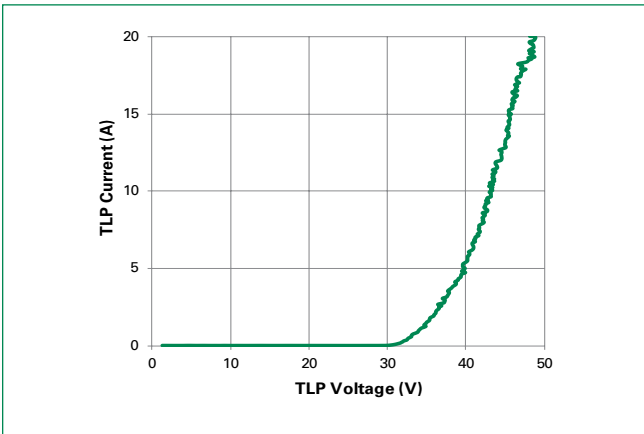


AQHV24-C Negative Transmission Line Pulsing(TLP) Plot

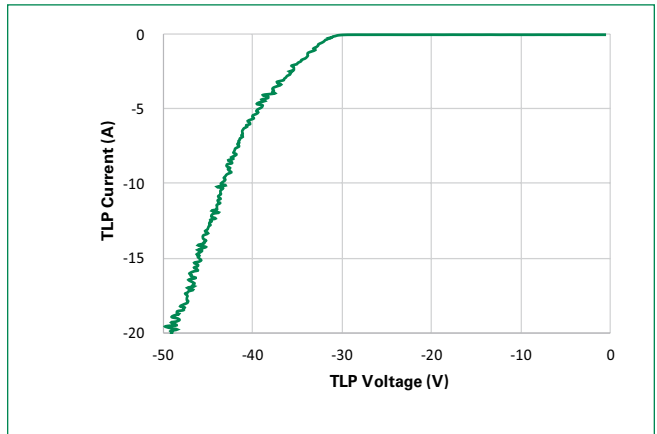


AQHV36-C Positive Transmission Line Pulsing(TLP) Plot

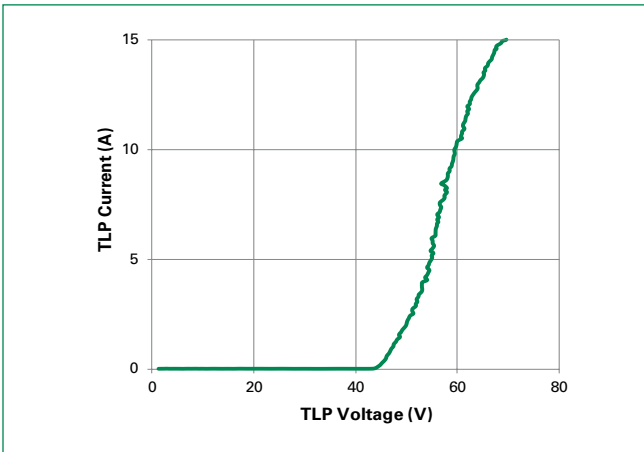


AQHV36-C Negative Transmission Line Pulsing(TLP) Plot

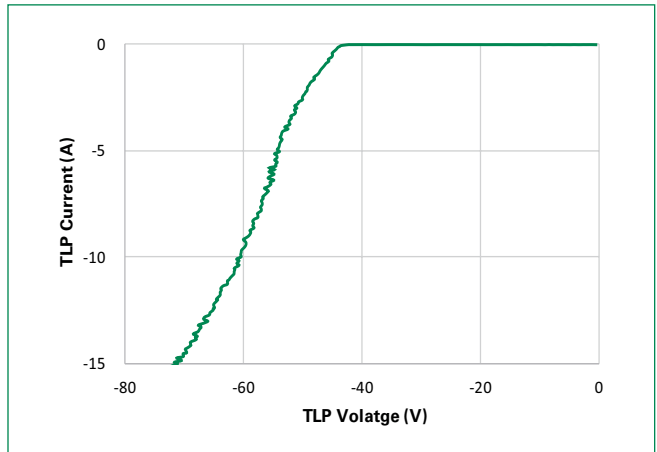


AQHV12-C +8kV Contact ESD Clamping Voltage

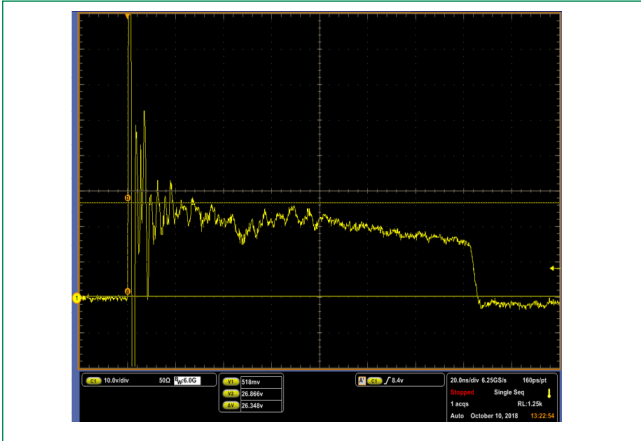


AQHV12-C -8kV Contact ESD Clamping Voltage

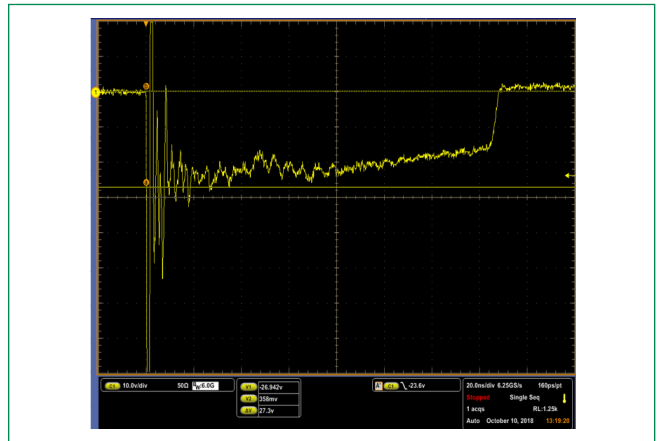


AQHV15-C +8kV Contact ESD Clamping Voltage

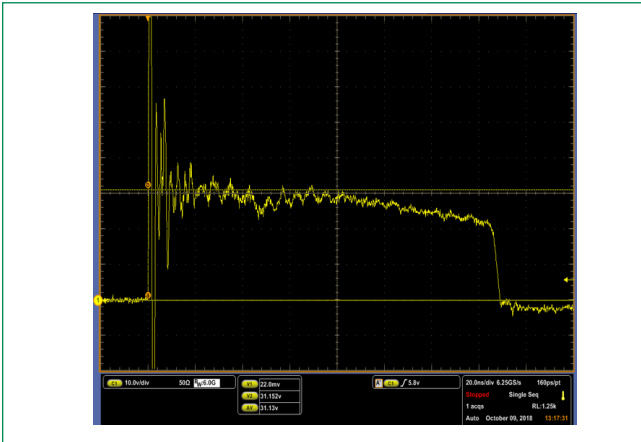


AQHV15-C -8kV Contact ESD Clamping Voltage

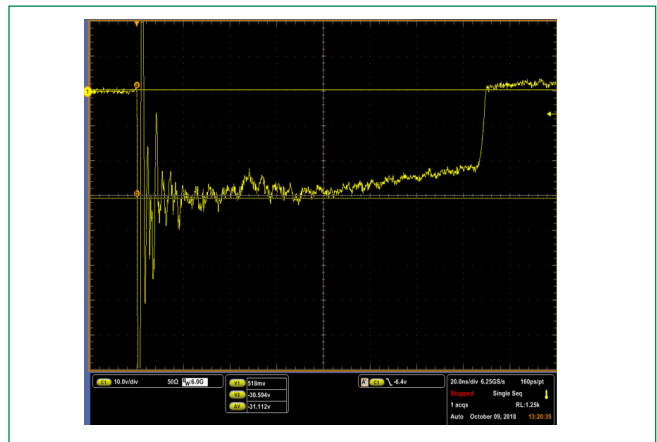


AQHV24-C +8kV Contact ESD Clamping Voltage

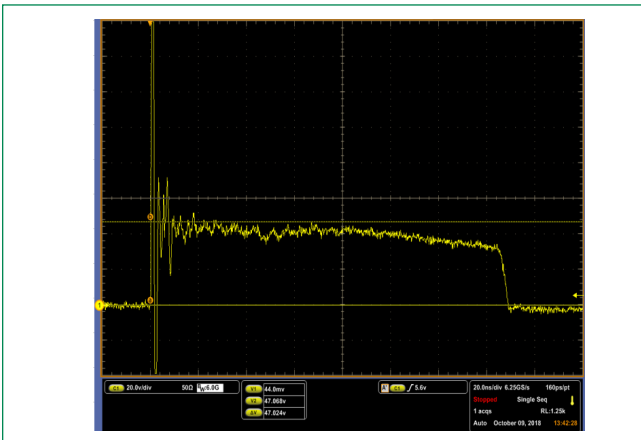


AQHV24-C -8kV Contact ESD Clamping Voltage

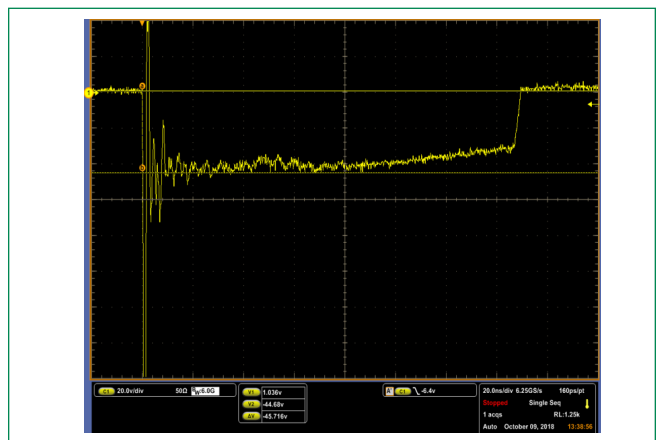

AQHV36-C +8kV Contact ESD Clamping Voltage

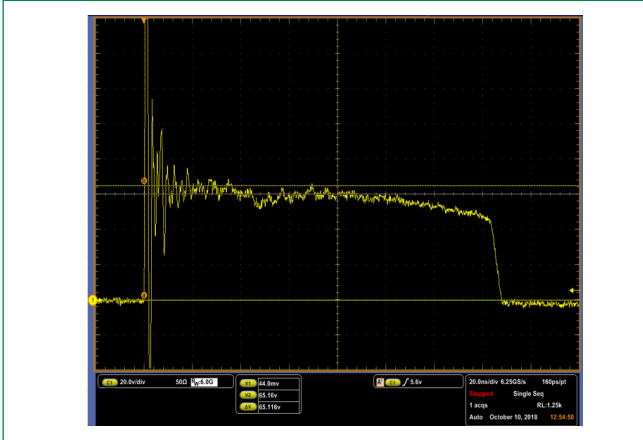


AQHV36-C -8kV Contact ESD Clamping Voltage

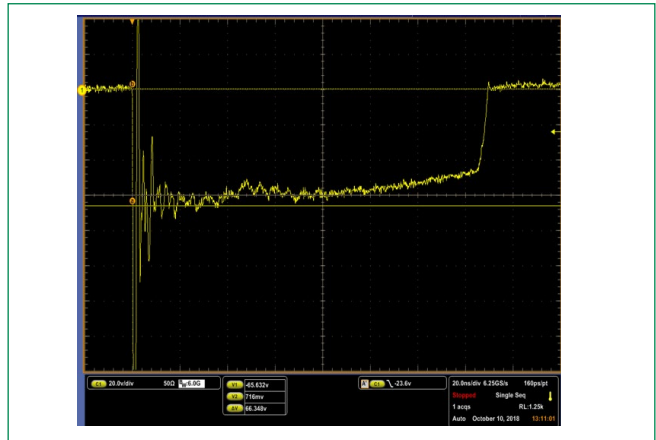


Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_p)	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

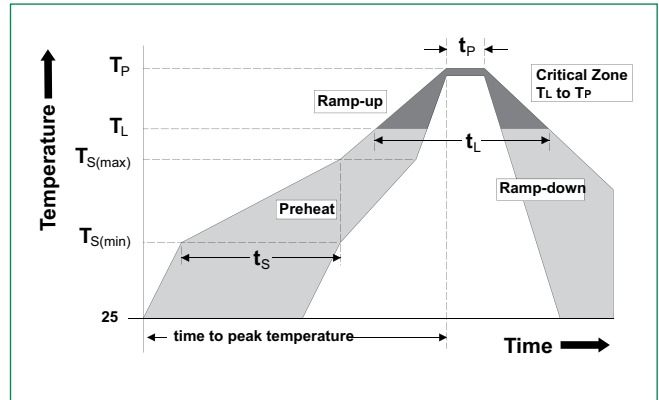


Part Marking System

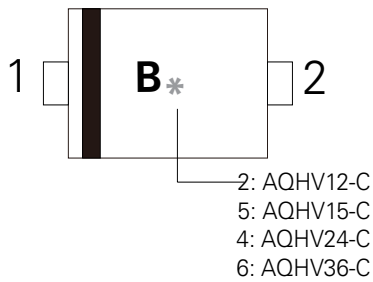

Product Characteristics

Lead Plating	Matte Tin
Lead Material	Copper Alloy
Substrate Material	Silicon
Body Material	Molded Compound
Flammability	UL Recognized compound meeting flammability rating V-0


Part Numbering System

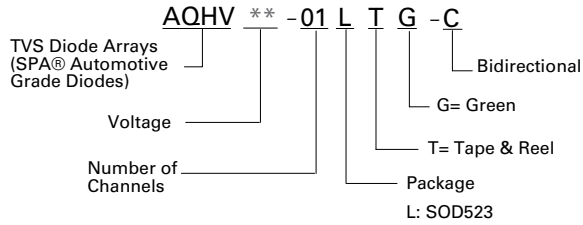

Ordering Information


Part Number	Package	Min. Order Qty.
AQHV12-01LTG-C	SOD523	5000
AQHV15-01LTG-C		
AQHV24-01LTG-C		
AQHV36-01LTG-C		

Package Dimensions – SOD-523

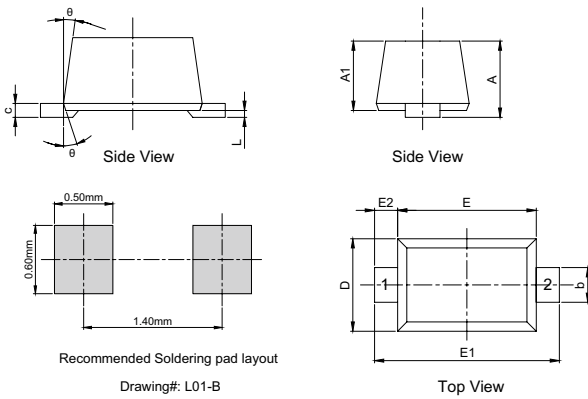

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.51	0.77	0.020	0.030
A1	0.50	0.70	0.020	0.028
b	0.25	0.35	0.010	0.014
c	0.08	0.15	0.003	0.006
D	0.70	0.90	0.028	0.035
E	1.10	1.30	0.043	0.051
E1	1.50	1.70	0.059	0.067
E2	0.20 REF		0.001 REF	
L	0.01	0.07	0.000	0.003
Ø	7° REF		7° REF	

Embossed Carrier Tape & Reel Specification – SOD-523

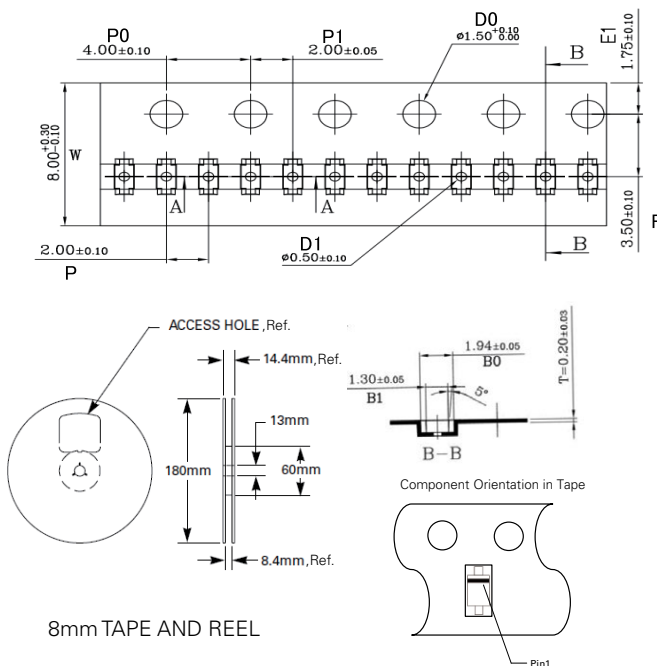

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A0	0.91	1.01	0.036	0.040
B0	1.89	1.99	0.074	0.078
D0	1.50	1.60	0.059	0.063
D1	0.40	0.60	0.016	0.024
E1	1.65	1.85	0.065	0.073
F	3.40	3.60	0.134	0.142
P0	3.90	4.10	0.154	0.161
P	1.90	2.10	0.075	0.083
P1	1.95	2.05	0.077	0.081
K0	0.68	0.78	0.027	0.031
T	0.17	0.23	0.007	0.009
W	7.90	8.30	0.311	0.327

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0F4U5P5-7](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#)
[P6KE39CA-TP](#) [P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [82356240030](#)
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)
[D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)