

LogiLink®



8-Port Gigabit Ethernet Desktop Switch

Art. No.: NS0106

NS0106 Gigabit Ethernet Switch, mini and exquisite, is specially designed for SOHO and small enterprise users. With easy installation, stable performance and high forwarding rate, it supports Auto MDI/MDIX and auto negotiates the port connection mode. In addition, learning/aging MAC address automatically and 8K MAC address table are also provided.

Features:

- » Eight 10/100/1000Base-T Gigabit Ethernet Ports
- » Supports Full/Half duplex modes and Auto-Negotiation
- » Access Control List (ACL) support
- » Supports IEEE802.1p QoS with 8 priority queues
- » 8K MAC address table and jumbo frame support up to 9KB



Specification:

Solution	RTL8370N
Protocols/Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3az
Interface	8 x 10/100/1000Mbps RJ45 ports
MAC Address Table	8K
Network Media	10Base-T, CAT.3 or above UTP, 10Base-Tx, CAT.5 UTP
Jumbo Frame	9K bytes
Packet Forwarding Rate (in 64 bytes)	10Mbps: 14880 pps 100Mbps: 148800 pps 1000Mbps: 1488000 pps
LED Indicator	10M/100M/1000M (Link/Act), Power
Power	External Power supply (DC 5V power input)
Power Consumption	Max. 4.5W
Product Dimension	160 x 72 x 24mm
Product Weight	130g

Best Connectivity



RoHS compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.



NS0106

v.2



4 052792 033762

Made in China


LogiLink®



8-Port Gigabit Ethernet Desktop Switch

Art. No.: NS0106

Operating Temperature	0°C ~ 50°C
Operating Humidity	10% ~ 90% RH, non-condensing
Storage Temperature	-40°C ~ 70°C
Storage Humidity	5% ~ 90% RH, non-condensing
Features	Port Mirroring, Redirect, Dropping, Priority adjustment, Traffic policing
Management	Cable diagnostics
QoS	IEEE802.1p QoS, 8 Priority Queues, scheduling algorithm
Security	Storm control, Access control

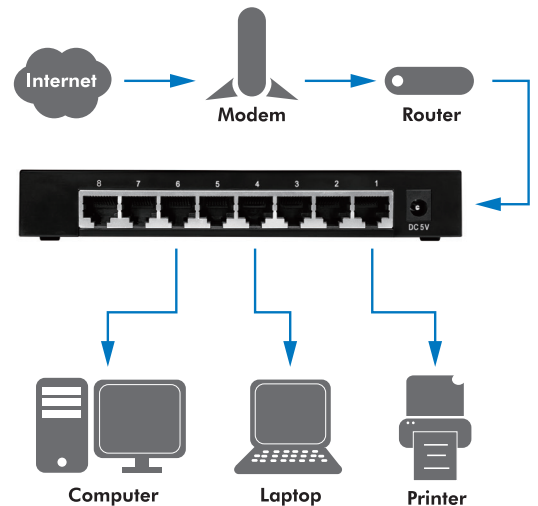

Package Contents:

- » 1 x 8-Port Gigabit Ethernet Desktop Switch
- » 1 x External Supply 5V/1A (5W)
- » 1 x User Manual

Package Information:

- » Packing Dimension: 180 x 140 x 35mm
- » Packing Weight: 0.25kg
- » Carton Dimension: 580 x 200 x 390mm
- » Carton Q'ty: 40pcs
- » Carton Weight: 10.7kg



NS0106

v.2



Made in China



RoHS compliant



* The specifications and pictures are subject to change without notice.

*All trade names referenced are the registered trademark of their respective owners.

Best Connectivity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Input Devices](#) category:

Click to view products by [Logilink](#) manufacturer:

Other Similar products are found below :

[80260-08](#) [M11L0A1](#) [M11L0B1M](#) [M21L0H1PX](#) [M41C091P100](#) [80260-00](#) [81521-08](#) [FKB4720-103](#) [84250-26](#) [84980-04](#) [84S-AC1-000](#)
[C10O0C1P](#) [JD-0700EU-2](#) [JM-0800-2](#) [JOY-THUMB](#) [JW-T0100](#) [89498-13](#) [89758-05](#) [89886-26](#) [89941-00](#) [FQ-XT](#) [G3-A1AM151NNNN](#)
[G80-3000LSCEU-2](#) [M11C011B](#) [TH500P00D4](#) [MJ0FGGRY](#) [JM-0800-0](#) [KBCV-4100W](#) [MR2110R5BB](#) [60C22-M7-4-020S](#) [67A-DF-3C-](#)
[060C](#) [84S-BB1-004](#) [81601-26](#) [G8011900LPMUS0](#) [G844420LUBEU0](#) [G84-4700LUCUS-0](#) [89701-26](#) [81485-26](#) [84105-13](#) [V400-W24 5M](#)
[V400-W23 5M](#) [G84-5200LCMEU-2](#) [M11F061P](#) [84Z2029-100](#) [4P182F1D0100](#) [M41L091M](#) [M41L091P](#) [60A00-8-050C](#) [84Z2029-78](#)
[XD2CF1111](#)