

PART NUMBER	SSL-LX2344ID	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
06.11.01	E.C.N. #10BRDR. & REDRAWN IN 3D.		Α
03.14.13	E.C.N. #10BRDR. & REDRAWN.		В



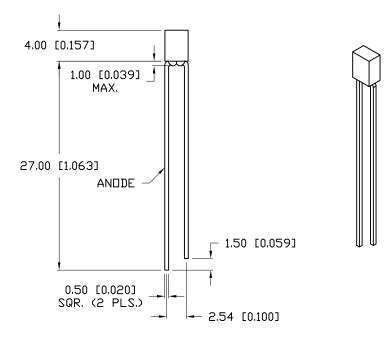

ELECTRO-OPTICAL	CHARACTERIS	TICS TA=25°	С	$I_f = 20 \text{mA}$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635		nm	
FORWARD VOLTAGE		2.0	2.5	v_f	
REVERSE VOLTAGE	5.0			V_r	I _r =100µA
AXIAL INTENSITY		10		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		100		2x theta	
FMITTED COLOR:	RFD				

LIMITS OF SAFE OPERATION AT 25°C

EPOXY LENS FINISH: RED DIFFUSED

PARAMETER	MAX	UNITS	
PEAK FORWARD CURRENT*	150	mA	
STEADY CURRENT	30	mA	
POWER DISSIPATION	105	mW	
DERATE FROM 25°C	-1.2	mW/°C	
OPERATING, STORAGE TEMP.	-40 TO +85	•C	
SOLDERING TEMP.	+ 260	. C	
2.0mm FROM BODY		3 SEC. MAX	

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN = +DECIMAL PRECISION MAX. = +0.00 | UNCONTROLLED DOCUMENT



425 N. GARY AVE.
CAROL STREAM, IL 60188-4900
PHONE: +1.800.278.5666
FAX: +1.630.315.2152
WEB: WWW.LUMEX.COM
MEMBER OF *ITW* PHOTONICS GROUP

2mm x 3mm RECTANGULAR, 635nm RED LED, RED DIFFUSED LENS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

 DATE:
 03.14.13
 DRAWN BY:
 MA

 PAGE:
 1 OF 1 CHKD BY:
 SS

 SCALE:
 NTS
 APRVD BY:
 SS

 UNIT:
 mm [INCH]
 NM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - Through Hole category:

Click to view products by Lumex manufacturer:

Other Similar products are found below:

LTL-10254W LTL-1214A LTL-3251A LTL-4262N LTL-433P LTL-5234 LTL87HTBK LTW-87HD4B HLMP-EL30-PS0DD

1L0532V23G0TD001 NSPW500CS NTE30036 NTE30044 NTE30059 NTE3020 LD CQDP-1U3U-W5-1-K LP379PPG1C0G0300001

SLR-342MC3F SLX-LX3044GD SLX-LX3044ID SLX-LX3044YD 1.90690.3330000 SSS-LX4673ID-410B 1L0532Y24I0TD001 2647SYGD/S530-E2 HLMP-1301-G00FG HLMP1385 LTL-10224W LTL-1224A LTL-1234A LTL-2251AT LTL-403HR LTL-4222 LU7-E-B
4380H1 HLMP-3962-F0002 HLMP-GG15-R0000 323-2SURD/S530-A3 L53SRC/E-Z L-7679C1ZGC 4302T1-5V 4306D23 4363D1/5

WP1503SRC/J4 WP153GDT WP153YDT WP1543SGC WP1543SURC WP53MGD WP7113HD