

Broadband CATV, Coupler 5-1000MHz


MACP-008125-CK07F0
V1

Features

- Surface Mount
- Typical Coupling 20dB
- RoHS* Compliant
- RoHS version of ELDC-20.
- 260°C Reflow Compatible
- Available on Tape and Reel.
- All wires are soldered to the substrate using HMP solder

Description

M/A-COM's MACP-008125-CK07F0 is a high performance 75 Ohm Coupler, in a SM-55 low cost, surface mount package. The MACP-008125-CK07F0 is designed for use in high volume CATV applications. Typical applications include Set-top Boxes, Network Interface Units, Broadband Amplifiers and Headend equipment.

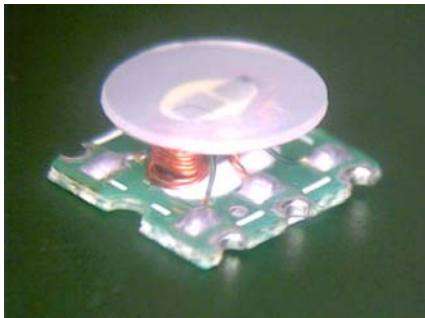


Pin Configuration


Pin No.	Function
1	Output
2	Ground, not connected
3	Isolated (external 75 Ohms termination)
4	Coupled
5	Ground
6	Input

Note: Reference Application Note **M513** for reel size information.

Schematic

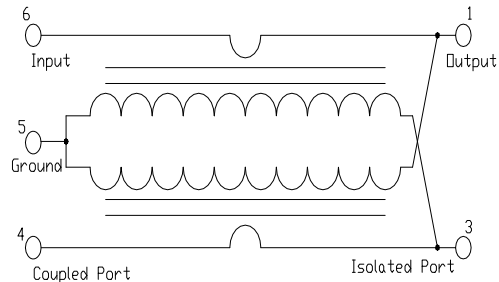

Case Style: SM-127

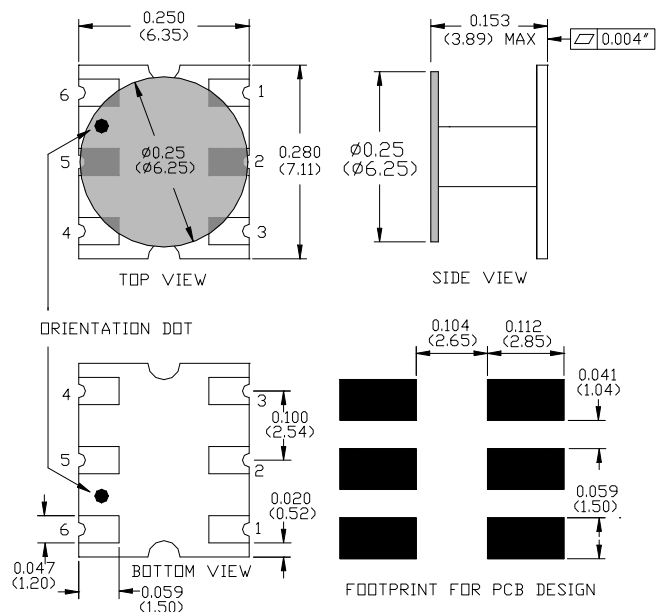

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Ordering Information

Part Number	Package
MACP-008125-CK07F0	900 piece reel
MACP-008125-CK07TB	Customer Test Board

Broadband CATV, Coupler 5-1000MHz

MACP-008125-CK07F0
V1


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹

Parameter	Test Conditions	Units	Min	Typ	Max
Mainline Loss	5 - 50 MHz	dB	—	0.6	0.7
	50 - 870 MHz	dB	—	0.45	0.65
	870 - 1000 MHz	dB	—	0.6	0.7
Coupling	5 - 870 MHz	dB	—	20	± 0.8
	870 - 1000 MHz	dB	—	20	± 1.0
Coupling Flatness	5 - 1000 MHz	dB	—	—	± 0.5
Directivity	5 - 870 MHz	dB	10	14	—
	870 - 1000 MHz	dB	7	9	—
Input Return Loss	5 - 50 MHz	dB	20	22	—
	50 - 1000 MHz	dB	22	27	—
Output Return Loss	5 - 50 MHz	dB	20	22	—
	50 - 1000 MHz	dB	22	28	—
Coupled Return Loss	5 - 50 MHz	dB	20	22	—
	50 - 1000 MHz	dB	20	27	—

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Recommended PCB Configuration



FOOTPRINT FOR PCB DESIGN

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

2

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266
- Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Broadband CATV, Coupler 5-1000MHz


MACP-008125-CK07F0
V1

Typical Performance Curves $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$


Main Line Loss

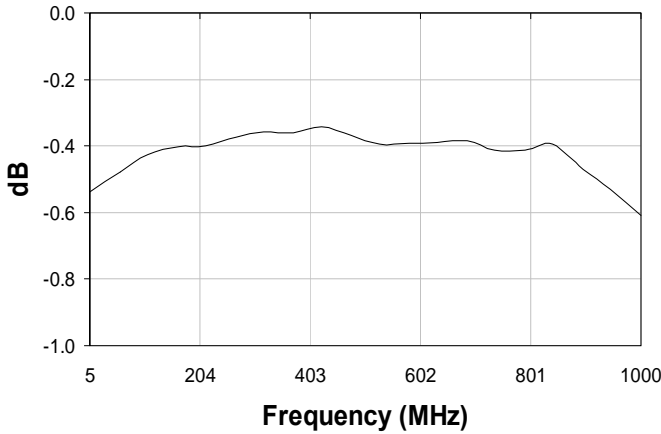


Return Loss: Input

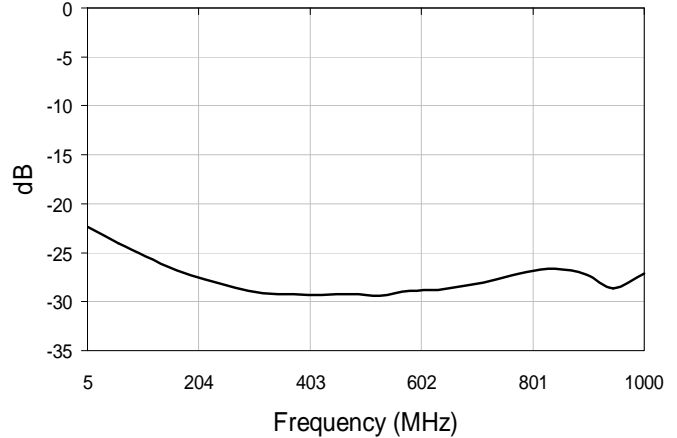


Coupling

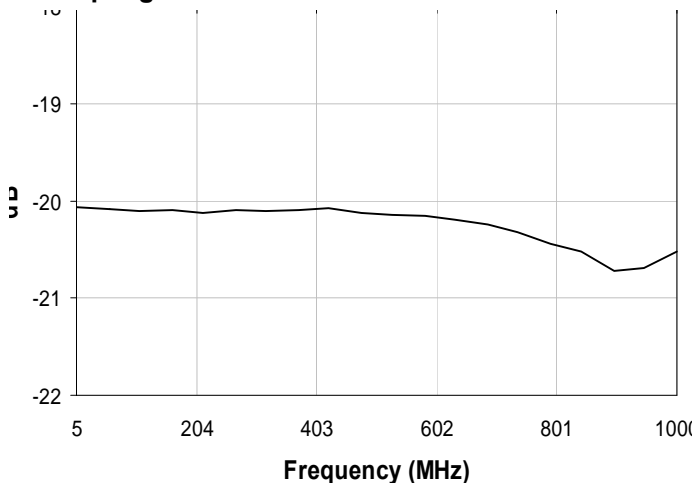


Return Loss: Output

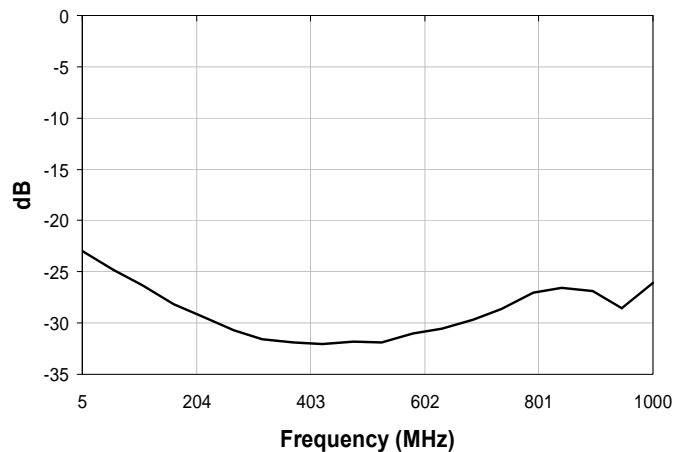

Directivity

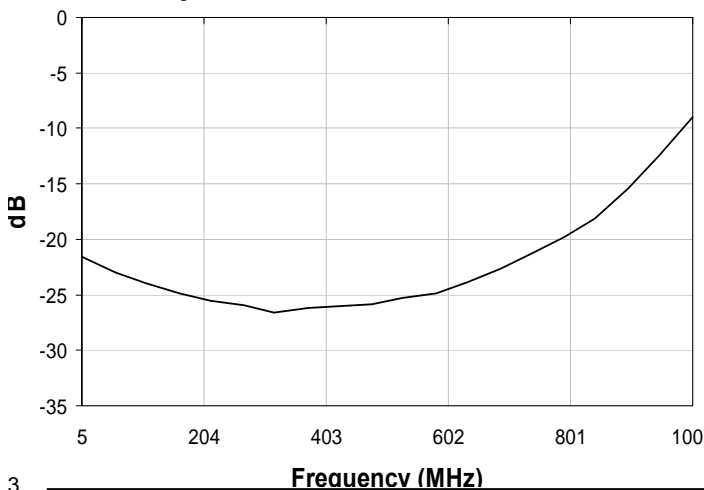

Return Loss: Coupled

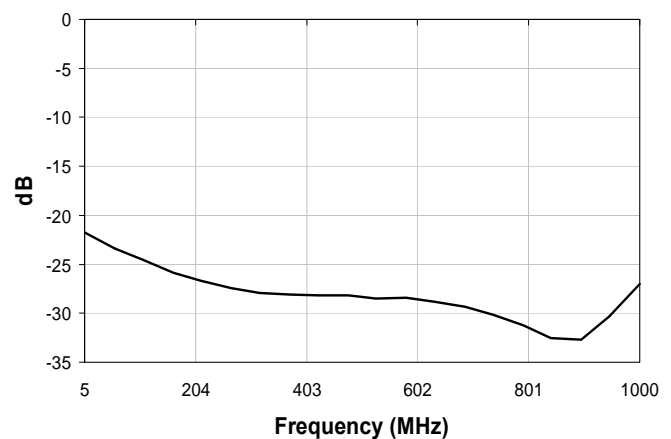

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [MACOM](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)