
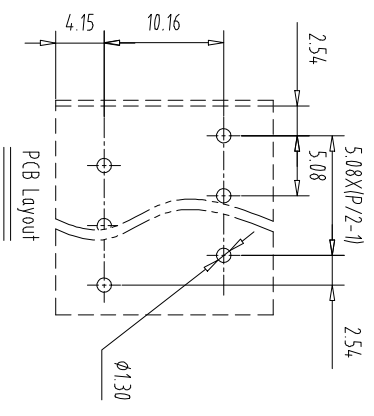
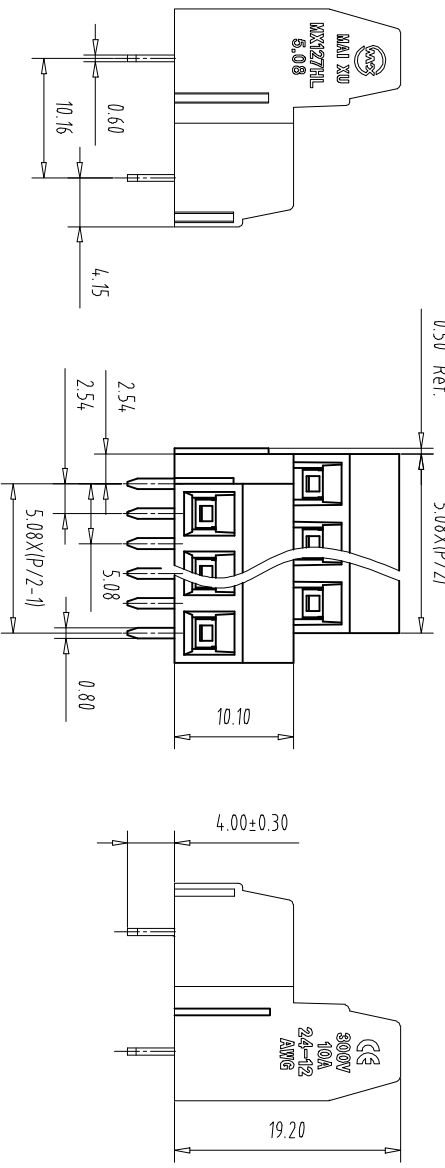


注：本板为禁止传输、复制、编辑、修改、以及用其内容进行交流

REV	ECN NO.	CONTENT	CHK	DATE

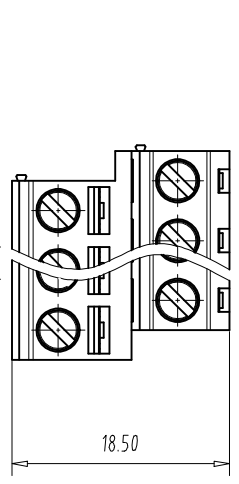

- NOTES1:
UL Standard
1.Rating voltage/current: 300V//10A
2.withstanding voltage: AC2000V//1Min
3.Torque value: M2.5, 3.54Lb.in
4.Wire range: 24~12AWG
IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	15A	/

- NOTES2:
1.Housing: PA66(UL 94V-0)
2.Cage: Brass(Ni Plated)
3.Solder Pin 1: Copper alloy(Sn Plated)
4.Solder Pin 2: Copper alloy(Sn Plated)
5.Screw: Steel(M2.5,Zn Plated)

- NOTES3:
1.Pitch: 5.08mm Poles: 04-48P
2.Stripping length: 6-7mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order
MX127HLA - 508 - XXP - XXXX - XX - X - X
产品型号 间距 颜色 根数 0:1-薄铜颜色
灰色:GY 橙色:OE 02-99:
蓝色:BU 红色:RD 定制颜色
黑色:BK 透明色:TT
绿色:GN 黄色:YW
透青色:TT 白色:WE

A-7其他定制
0:Y一字螺丝
1:S十字螺丝
2:P十字螺丝
Cu:铜方块
Fe:铁方块

Pitch	Range	In	Nominal Dimension	Range
mm	Over	In mm	Over	Over
6	TO	6	TO	TO
10	TO	10	TO	TO
24	TO	24	TO	TO
30	TO	30	TO	TO
60	TO	60	TO	TO
100	TO	100	TO	TO
150	TO	150	TO	TO
±0.15	±0.20	±0.30	±0.30	±0.50
±0.30	±0.30	±0.30	±1.00	±1.30
±2°	±2°	±2°	±2°	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	DATE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD 慈溪市迈旭电子有限公司					DWGNO.
MX127HLA-5.08-XXP					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MI-272](#) [MPT-275](#) [15602-04-08-21](#)
[ELM10110G](#) [BA311TU](#) [BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1712417](#) [1713088](#) [1745195](#)
[1760594](#) [1-796689-8](#) [1800114](#) [20020314-C121B01LF](#) [KP03215000J0G](#) [KP04215000J0G](#) [S451](#) [29.007](#) [29.116](#) [30.204](#) [30.503](#) [30.756](#)
[30.853](#) [996750](#) [1710052](#) [1777707](#) [1-796692-3](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#) [30.754](#) [30.757](#) [32.058](#)