
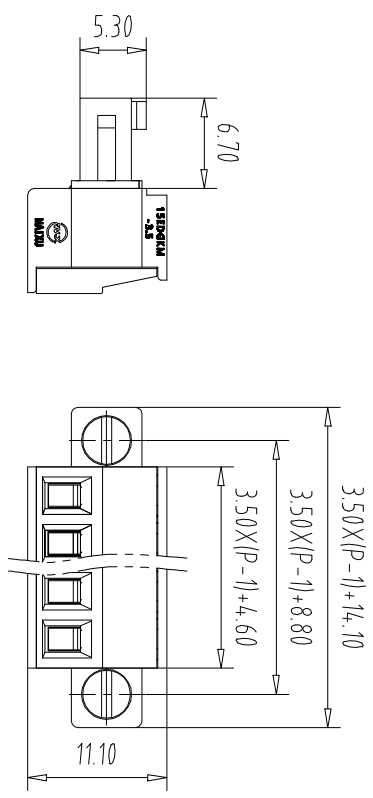


注：本板为禁止转输、复制、编辑文件，以及用其内容进行交流

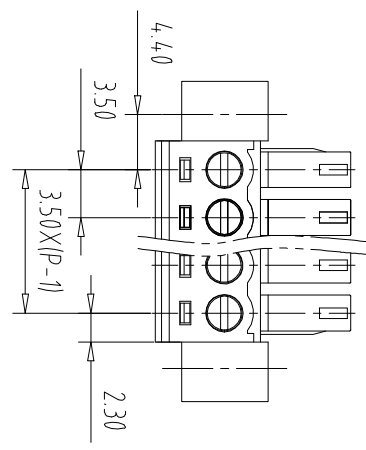

REV	ECN NO.	CONTENT	CHK	DATE

UL Standard

- NOTES1:
- 1.Rating voltage/current: 300V/8A
 - 2.withstanding voltage: AC2000V/1min
 - 3.Torque value: M2.0, 1.77Lb.in
 - 4.Wire range: 28~16AWG
- IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

1. Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

- 1.Housing: PA66 (UL94V-0)
 2.Cover: PA66 (UL94V-0)
 3.Cage: Brass (Ni Plated)
 4.Clamp: Copper alloy (Ni Plated)
 5.Screw 1: Steel (M2.0,Zn Plated)
 6.Screw 2: Steel (M2.5,Zn Plated)

NOTES2:

- 1.Pitch: 3.5mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGKM - 35 - XXP - XXXX - XX - X - X

产品型号 间距 颜色 板数 01:常规颜色
 灰色:GY 橙色:OE 02-99:
 蓝色:BU 红色:RD 定制颜色
 黑色:BK 透明色:TT
 绿色:GN 黄色:YW
 透明色:TT 白色:WE

A-Z其他定制
 0-Y一字螺丝
 1-S十字螺丝
 Cu:铜方块
 Fe:铁方块
 2-P:平头十字螺丝

Pitch Range In mm	Nominal Dimension In mm	Range
Over 6 TO	Over 10 TO	Over 30 TO
Over 10 TO	Over 24 TO	Over 60 TO
Over 10 TO	Over 24 TO	Over 100 TO
Over 10 TO	Over 24 TO	Over 150 TO

Over 6 TO	Over 10 TO	Over 24 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	SCALE	SHEET/OF	1/1
APP	DATE	DATE	SCALE	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD			MX15EDGKM-35-XXP		
MAIXU 慈溪市迈旭电子有限公司			DWGNO.		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1800272](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#)
[25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#)
[SH06-3,81](#) [SH08-5,08](#) [SH08-5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#)