


- Features :
 - 2:1 wide input range
 - 4:1 wide input range(option)
 - 1000VDC I/O isolation
 - 3000VDC I/O isolation(option)
 - Built-in EMI filter
 - Protections: Short circuit / Overload
 - Cooling by free air convection
 - Five-sided shield metal case
 - 100% burn-in test
 - Low cost / High reliability
 - Approvals: FCC / CE
 - 2 years warranty



SPECIFICATION

ORDER NO.	SCW05A-05	SCW05B-05	SCW05C-05	SCW05A-09	SCW05B-09	SCW05C-09	SCW05A-12	SCW05B-12	SCW05C-12	SCW05A-15	SCW05B-15	SCW05C-15		
OUTPUT	DC VOLTAGE		5V		9V		12V		15V					
	CURRENT RANGE		200 ~ 1000mA		111 ~ 556mA		94 ~ 470mA		80 ~ 400mA					
	RATED POWER		5W		5W		5.6W		6W					
	RIPPLE & NOISE (max.) Note.2		50mVp-p		60mVp-p		60mVp-p		60mVp-p					
	LINE REGULATION Note.3		±0.5%											
	LOAD REGULATION Note.4		±0.5%											
	VOLTAGE ACCURACY		±2.0%											
SWITCHING FREQUENCY		50KHz min.												
INPUT	VOLTAGE RANGE													
	A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC													
	EFFICIENCY (Typ.)		75%	77%	77%	80%	81%	83%	80%	82%	83%	81%	83%	81%
	DC CURRENT		Full load			A: 617mA B: 301mA C: 147mA		No load			A: 41mA B: 22mA C: 12mA			
	FILTER		Pi network											
PROTECTION		Fuse recommended												
PROTECTION (Note. 5)	OVERLOAD		150 ~ 250% rated output power											
	SHORT CIRCUIT		All output equipped with short circuit											
ENVIRONMENT	WORKING TEMP.		-40 ~ +71°C (Refer to output load derating curve)											
	WORKING HUMIDITY		20% ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY		-40 ~ +105°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT		±0.03% / °C (0 ~ 50°C)											
	VIBRATION		10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes											
SAFETY & EMC	SAFETY STANDARDS		EAC TP TC 004 approved											
	WITHSTAND VOLTAGE		I/P-O/P: 1KVDC											
	ISOLATION RESISTANCE		I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH											
	ISOLATION CAPACITANCE		80pF max.											
	EMC EMISSION		Compliance to EN55032 Class B, FCC part 15 Class B, EAC TP TC 020											
EMC IMMUNITY		Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020												
OTHERS	MTBF		900khrs min. MIL-HDBK-217F(25°C)											
	DIMENSION		31.8*20.3*12.2mm or 1.25**0.80**0.48" inch (L*W*H)											
	WEIGHT		15g											

Mechanical Specification

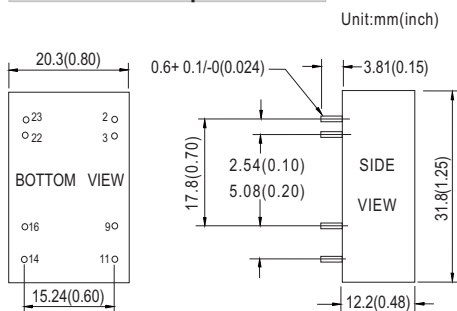


Pin Size is Tolerance 0.5±0.05mm, Tolerance .X or .XX= ±0.5mm

Pin Configuration

Pin No.	Output
2 & 3	-Vin
9	N.C.
11	N.C.
14	+Vout
16	-Vout
22 & 23	+Vin

Derating Curve

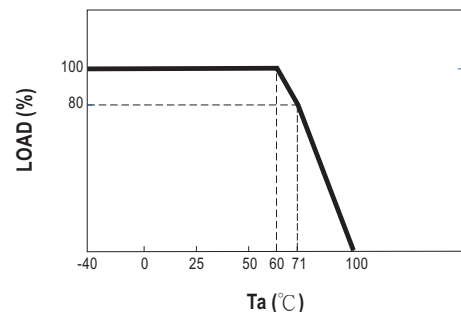

NOTE

- All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- Line regulation is measured from low line to high line at rated load.
- Load regulation is measured from 20% to 100% rated load.
- Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Mean Well](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [19-130041](#) [CE-1003](#)
[CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-](#)
[1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-2405](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-R5022-](#)
[EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [VI-LJ11-iz](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)