




MBR30U45CT

LOW VF TRENCH SCHOTTKY BARRIER RECTIFIER

Features


- Schottky Barrier Diodes
- 30A Total (15A Per Diode Leg)
- Guard Ring for Stress Protection
- Low Forward Voltage
- 175°C Operating Junction Temperature
- Epoxy Meets UL 94 V 0 @ 0.125 in
- Low Power Loss/High Efficiency
- High Surge Capacity
- Low Stored Charge Majority Carrier Conduction
- Pb Free Packages are Available*

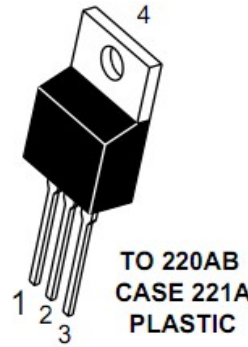

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 2.26 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds

TO-220-3L PACKAGE OUTLINE DIMENSIONS

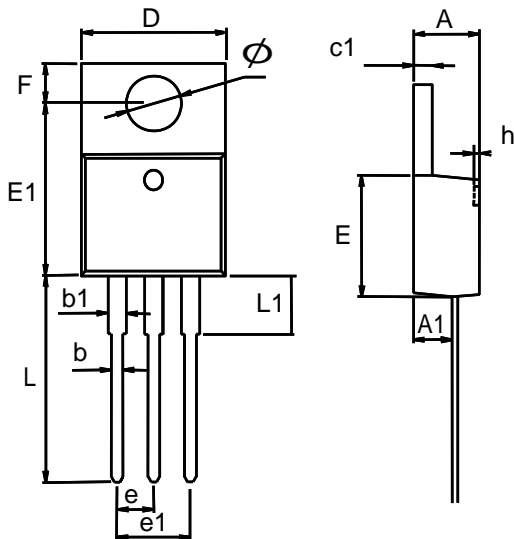

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	4.470	4.670
A1	2.520	2.820
b		0.910
b1	1.170	1.370
c	0.310	0.530
c1	1.170	1.370
D	10.010	10.310
E	8.500	8.900
E1	12.060	12.460
e	2.540 TYP.	
e1	4.980	5.180
F	2.590	2.890
h	0.000	0.300
L	13.400	13.800
L1	3.560	3.960
Φ	3.735	3.935

RATINGS (Per Diode Leg)

Rating	Symbol	MBR30U45CT	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	45	V
Average Rectified Forward Current (Rated V_R) $T_C = 133^\circ\text{C}$	$I_{F(AV)}$	15	A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20 kHz) $T_C = 133^\circ\text{C}$	I_{FRM}	30	A
Maximum Instantaneous Forward Voltage ($I_F = 15\text{Amps}$, $T_C = 25^\circ\text{C}$)	V_F	0.45	V
Nonrepetitive Peak Surge Current (Surge applied at rates load conditions halfwave, single phase, 60Hz)	I_{FSM}	200	A
Peak Repetitive Reverse Surge Current (2.0 μs , 1.0 kHz)	I_{RRM}	5	A
Operating Junction Temperature	T_J	- 65 to +175	$^\circ\text{C}$
Voltage Rate of Change (Rated V_R)	dv/dt	10,000	V/ μs
Maximum Instantaneous Reverse Current (Rated dc Voltage, $T_C = 125^\circ\text{C}$) (Rated dc Voltage, $T_C = 25^\circ\text{C}$)	I_R	6.0 0.1	mA

MBR30U45CT

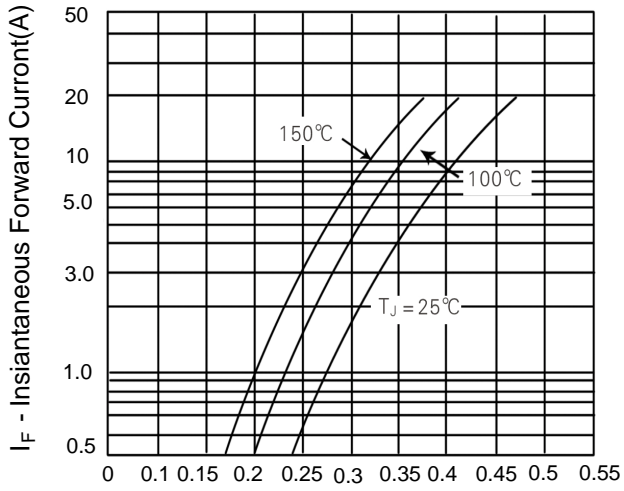


Figure 1. Typical Forward Voltage Per Diode

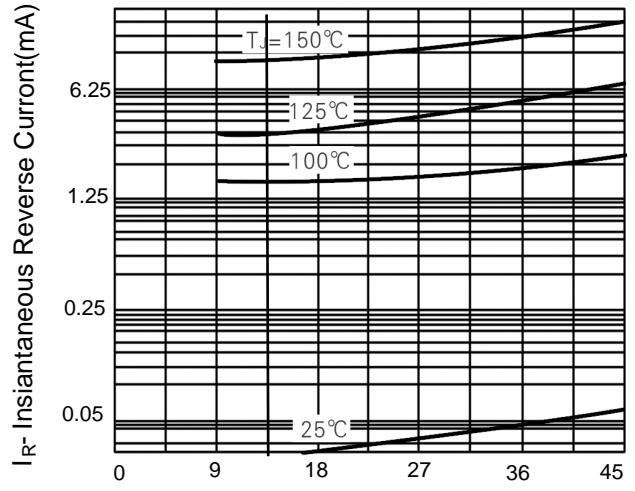


Figure 2. Typical Reverse Current Per Diode

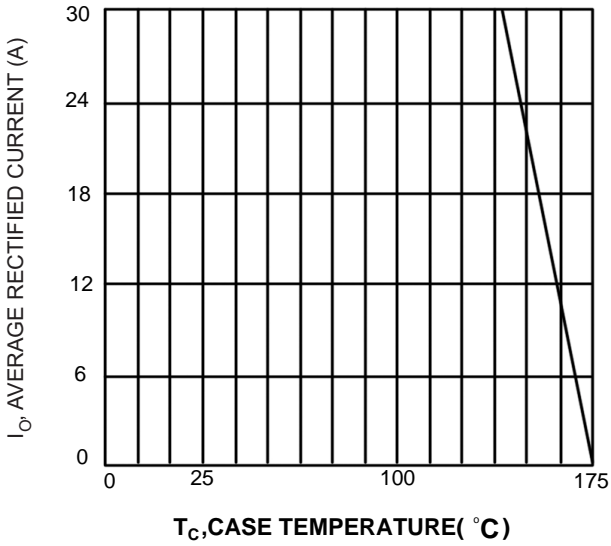


Fig.3 Forward Current Derating Curve

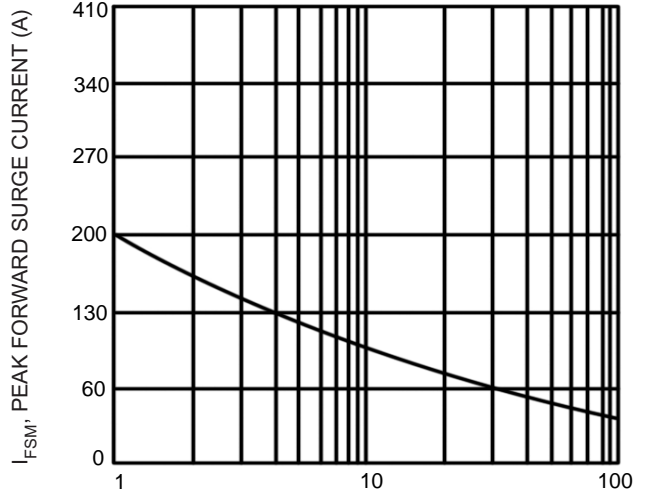


Fig.4 Max Non-Repetitive Surge Current

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [microdiode electronics manufacturer](#):

Other Similar products are found below :

[MBR30150CT](#) [SL1045U](#) [MBR2060CT](#) [ST56BF](#) [DB157](#) [SS56F](#) [SL34A](#) [KBU806](#) [MBRF10150CT](#) [SK34](#) [79L08](#) [MBRF1045CT](#) [ST36A](#)
[B340A](#) [HER305](#) [HER207](#) [BZT52C24S](#) [HER107](#) [79L12](#) [SMCJ40CA](#) [HER307](#) [HER304](#) [SMBJ8.0A](#) [SMAJ75A](#) [BZT52C47](#) [DB104](#)
[SF56OJ](#) [SMBJ250CA](#) [S2A](#) [SMBJ54CA](#) [MM1W15-FHZ](#) [US5M-SMC](#) [KBP410](#) [SS56BF-S56B](#) [MMBD4148SE](#) [SMCJ40A](#) [SMCJ12A](#)
[UF5404](#) [SF54\(GPP\)](#) [SR05LC](#) [MBRF10100CT](#) [30U45](#) [DSR1M](#) [LB8S](#) [S1g](#) [MBRF3045CT](#) [DB104S](#) [SMCJ58A](#) [P6KE27CA](#) [ES2B](#)