




DB151S THRU DB157S

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Voltage Range - 50 to 1000 Volts Current - 1.5 Ampere

DBS

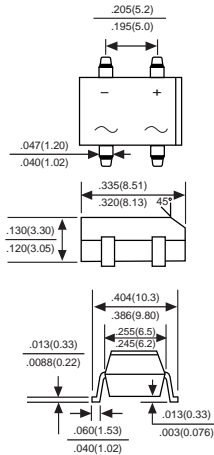

Dimensions in inches and (millimeters)

FEATURES

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed:
- ◆ 250*/10 seconds / 0.375"(9.5mm) led length at 5 lbs., (2.3kg)tension
- ◆ Small size, simple installation
Leads solderable per MIL-STD-202, Method 208
- ◆ High surge current capability

MECHANICAL DATA

Case: Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: Polarity symbols marked on case

Mounting Position: Any

Weight: 0.02 ounce, 0.4 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25* ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, For capacitive load derate current by 20%.

MDD Catalog Number	SYMBOLS	MDD	MDD	MDD	MDD	MDD	MDD	MDD	UNITS
		DB151S	DB152S	DB153S	DB154S	DB155S	DB156S	DB157S	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_A=40^\circ C$	$I_{F(AV)}$	1.5							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							Amps
Maximum instantaneous forward voltage drop per bridge element at 1.5A	V_F	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ C$ $T_A=125^\circ C$	I_R	10 500							μA μA
Operating temperature range	T_J	-55 to +150							$^\circ C$
storage temperature range	T_{STG}	-55 to +150							$^\circ C$

NOTES: DBS for surface mount package.



RATINGS AND CHARACTERISTIC CURVES DB151S THRU DB157S

FIG. 1- MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

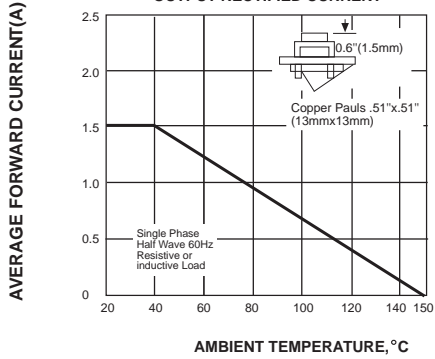


FIG. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

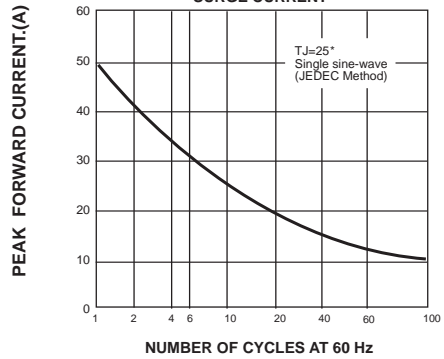


FIG. 3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

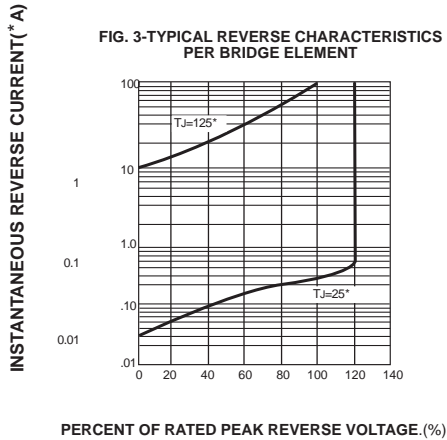


FIG. 4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


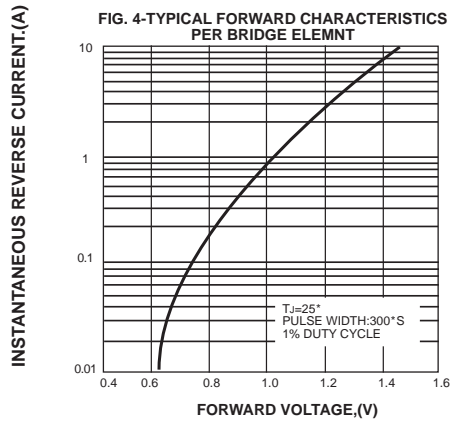


FIG. 3- TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT



The curve graph is for reference only, can't be the basis for judgment (曲线图仅供参考!)

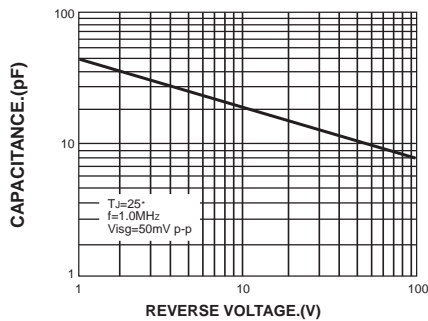

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Microdiode Electronics](#) manufacturer:

Other Similar products are found below :

[MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#)
[GSIB680-E3/45](#) [DB101-BP](#) [DBA150G](#) [DBA250G](#) [DBD10G-TM-E](#) [DBF10G](#) [DBG150G](#) [DBG250G](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#)
[BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [26MT120](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU6M](#) [GBU8D-BP](#)
[GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#)
[BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-E3/51](#) [BU2006-E3/45](#)