




Part Number: **MS-400014-2**





Revision 2021-Dec-01 - Generated 2021-Dec-01

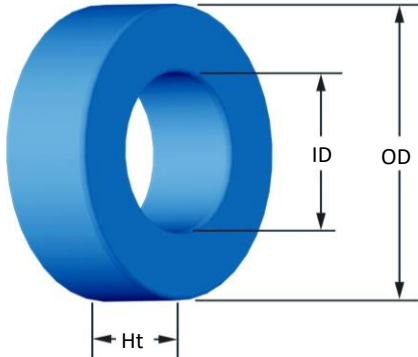

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	101.60 mm 102.87 mm	4.000 in 4.050 in
ID	(nom. - bare core) (min.)	57.15 mm 55.75 mm	2.250 in 2.195 in
HT	(nom. - bare core) (max.)	16.51 mm 17.78 mm	0.650 in 0.700 in
Mass	(approximate)	420 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	3.52 cm ²	
	L _e - Eff. Mag. Path Length	24.271 cm	
	V _e - Eff. Core Volume	85.5 cm ³	
	WA - Min. Eff. Window Area	24.4 cm ²	
	sa - Surface Area	303 cm ²	
	mlt - mean length per turn	11.1 cm	
Inductance	μ _i (reference)	14	
	A _L value (nominal)	25.6 nH/N ²	
	Test Winding	N=140, #18 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	2.2 V	
	AL tolerance	±8%	
Core Loss	Core Loss(mW/cm ³): $\frac{a}{Bpk^3} + \frac{b}{Bpk^{2.3}} + \frac{c}{Bpk^{1.65}} + d \cdot Bpk^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=1.814E+08, c=3.377E+06, d=2.628E-14		
	B _{pk}	300 G	
	frequency	100 kHz	
	Core Loss (nominal)	180 mW/cm ³	
	Core Loss (maximum)	207 mW/cm ³	
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.000E-02, b=9.443E-07, c=1.533, d=0.000		
	H _{dc}	200 Oe	
	Percent Initial Perm(nom.)	75.9%	
	Percent Initial Perm(min.)	70.4%	
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	16 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	44	56	70	88	110	138	172	215	268	335	417
		Rdc(Ω)	10.0 m	20.2 m	40.2 m	80.5 m	160.0 m	319.2 m	632.7 m	1.3	2.5	5.0	9.8
Full Winding	Turns	128	198	306	474	733	1,135	1,756	2,719	4,208	6,512	10,079	
	Rdc(Ω)	29.1 m	71.6 m	175.9 m	433.4 m	1.1	2.6	6.5	15.9	39.1	96.4	237.2	

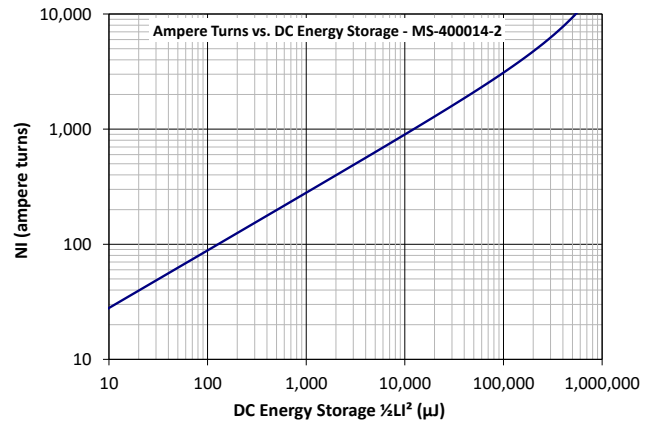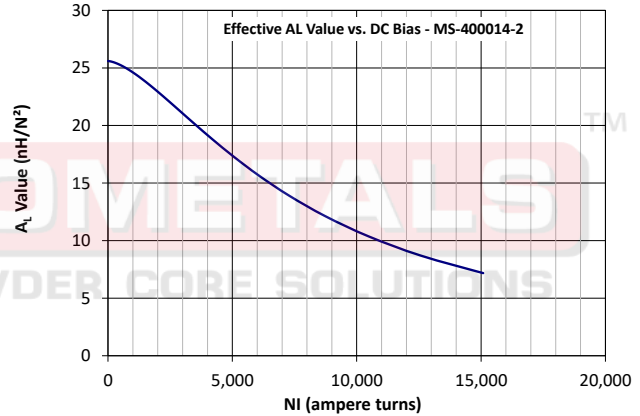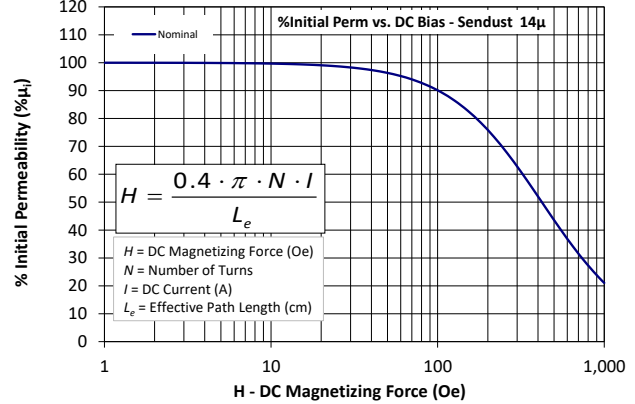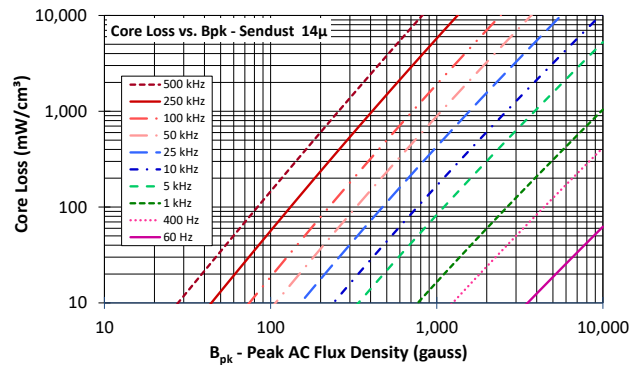

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Toroids / Ferrite Rings](#) category:

Click to view products by [Micrometals](#) manufacturer:

Other Similar products are found below :

[432202094771](#) [432202130672](#) [4327 018 35221](#) [432703013571](#) [4327 030 57161](#) [432703057191](#) [432202101631](#) [4327 030 57111](#) [5343232001](#)
[5977004801](#) [5976000201](#) [XRRH3.5*3.2*1.6](#) [XRRH4*2*2](#) [XRRH3.5*6*1.0](#) [XRRH3.5*6*1.5](#) [XRRH3.5*3.5*1.8](#) [XRR4*12](#) [XRRH6*3*3](#)
[XRRH3.5*4*1.0](#) [XRR3*12](#) [XRRH3.5*9*1.0](#) [XRRH3.5*5*1.8](#) [XRR4*10](#) [XRRH3.5*9.0*1.5](#) [XRRH3.5*3.5*1.5](#) [XRRH3.5*5*1.5](#)
[XRRH3.5*2*1.8](#) [XRRH3.5*3*1.5](#) [XRRH4*6*2](#) [XRRH3.5*3*1.8](#) [F9-BP RH 3.5*6*1.5](#) [F9-BP T 3.5*3*1.5](#) [F9-BP RH 3.5*4*1.5](#) [F9-AP RH](#)
[3.5*5*1.5](#) [XRR4*20](#) [XRRH4*10*2](#) [XRRH5*3*3](#) [F9-BP RH 3.5*9*1.5](#) [XRRH9.5*19.5*5](#) [XRRH7.8*12.7*4.5](#) [XRRH12*15*7.2](#)
[XRRH9*16*5](#) [XRRH12*20*6.5](#) [XRR6*25](#) [XRR8*20](#) [XRRH14.2*20*8](#) [XRRH14.2*28.5*6.35](#) [XRR8*30](#) [XRRH10.5*20*5.5](#)
[XRRH10.5*20*6.5](#)