

PNP SWITCHING SILICON TRANSISTOR

Qualified per MIL-PRF-19500/290

Devices

2N2904	2N2905
2N2904A	2N2905A
2N2904AL	2N2905AL

Qualified Level

JAN
JANTX
JANTXV
JANS

MAXIMUM RATINGS


Ratings	Symbol	2N2904 2N2905	2N2904A, L 2N2905A, L	Unit
Collector-Emitter Voltage	V_{CEO}	40	60	Vdc
Collector-Base Voltage	V_{CBO}	60		Vdc
Emitter-Base Voltage	V_{EBO}	5.0		Vdc
Collector Current	I_C	600		mAdc
Total Power Dissipation @ $T_A = +25^{\circ}\text{C}$ ⁽¹⁾ @ $T_C = +25^{\circ}\text{C}$ ⁽²⁾	P_T	0.6		W
		3.0		W
Operating & Storage Junction Temp. Range	T_J, T_{stg}	-65 to +200		$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.29	$^{\circ}\text{C}/\text{mW}$

1) Derate linearly 3.43 W/ $^{\circ}\text{C}$ for $T_A > +25^{\circ}\text{C}$

2) Derate linearly 17.2 W/ $^{\circ}\text{C}$ for $T_C > +25^{\circ}\text{C}$

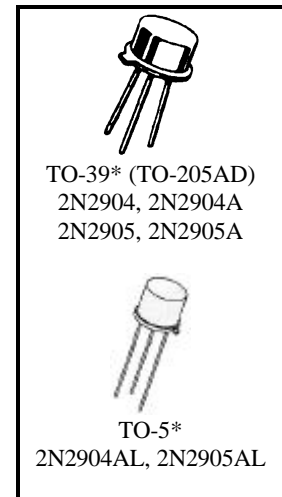

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS ($T_A = +25^{\circ}\text{C}$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 10 \text{ mAdc}$	2N2904, 2N2905 2N2904A, L, 2N2905A, L	$V_{(BR)CEO}$	40 60	Vdc
Collector-Emitter Cutoff Voltage $V_{CE} = 40 \text{ Vdc}$ $V_{CE} = 60 \text{ Vdc}$	2N2904, 2N2905 2N2904A, L, 2N2905A, L	I_{CES}	1.0 1.0	μAdc
Collector-Base Cutoff Current $V_{CB} = 50 \text{ Vdc}$ $V_{CB} = 60 \text{ Vdc}$	2N2904, 2N2905 2N2904A, L, 2N2905A, L All Types	I_{CBO}	20 10 10	ηAdc μAdc
Emitter-Base Cutoff Current $V_{EB} = 3.5 \text{ Vdc}$ $V_{EB} = 5.0 \text{ Vdc}$		I_{EBO}	50 10	ηAdc μAdc

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS ⁽³⁾				
Forward-Current Transfer Ratio $I_C = 0.1 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2904 2N2905 2N2904A, 2N2904AL 2N2905A, 2N2905AL	h_{FE}	20		
		35		
		40		
		75		
$I_C = 1.0 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2904 2N2905 2N2904A, 2N2904AL 2N2905A, 2N2905AL		25	175	
		50	450	
		40	175	
		100	450	
$I_C = 10 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2904 2N2905 2N2904A, 2N2904AL 2N2905A, 2N2905AL		35		
		75		
		40		
		100		
$I_C = 150 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2904, 2N2904A, L 2N2905, 2N2905A, L	40	120		
	100	300		
$I_C = 500 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}$ 2N2904 2N2905 2N2904A, 2N2904AL 2N2905A, 2N2905AL	20			
	30			
	40			
	50			
Collector-Emitter Saturation Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$	$V_{CE(sat)}$		0.4 1.6	Vdc
Base-Emitter Voltage $I_C = 150 \text{ mAdc}, I_B = 15 \text{ mAdc}$ $I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$	$V_{BE(sat)}$		1.3 2.6	Vdc

DYNAMIC CHARACTERISTICS

Small-Signal Cutoff Frequency $I_C = 1.0 \text{ mAdc}, V_{CE} = 10 \text{ Vdc}, f = 1.0 \text{ kHz}$ 2N2904 2N2905 2N2904A, 2N2905A 2N2904AL, 2N2905AL	h_{fe}	25 50 40 100		
Small-Signal Cutoff Frequency, Magnitude $I_C = 50 \text{ mAdc}, V_{CE} = 20 \text{ Vdc}, f = 100 \text{ MHz}$	$ h_{fe} $	2.0		
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{obo}		8.0	pF
Input Capacitance $V_{EB} = 2.0 \text{ Vdc}, I_C = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$	C_{ibo}		30	pF

SWITCHING CHARACTERISTICS

Turn-On Time $V_{CC} = 30 \text{ Vdc}; I_C = 150 \text{ mAdc}; I_{B1} = 15 \text{ mAdc}$	t_{on}		45	ηs
Turn-Off Time $V_{CC} = 30 \text{ Vdc}; I_C = 150 \text{ mAdc}; I_{B1} = I_{B2} = 15 \text{ mAdc}$	t_{off}		300	ηs

(3) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Microsemi manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMMTA92QTA](#)
[2N2369ADCSM](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[US6T6TR](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [EMT2T2R](#) [MCH6102-TL-E](#)
[FP204-TL-E](#) [NJL0302DG](#) [2N3583](#) [2SA1434-TB-E](#) [2SC3143-4-TB-E](#) [2SD1621S-TD-E](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#)
[NTE101](#) [NTE13](#) [NTE15](#)