


## Mikromedia 4 for STM32F2 Capacitive FPI with bezel

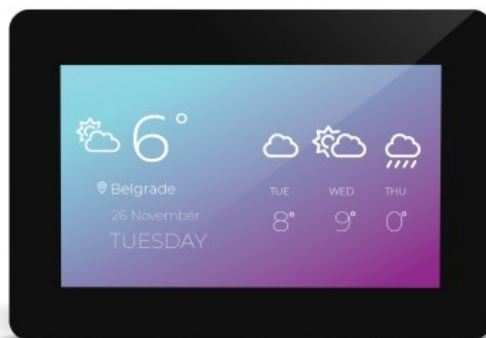

PID: MIKROE-4314

### Rich with peripherals

Mikromedia 4 for STM32F2 CAPACITIVE FPI with bezel is not limited to multimedia-based applications only. USB, digital motion sensor, battery charging functionality, SD card reader and much more expands its use beyond the multimedia.

Mikromedia 4 for STM32F2 CAPACITIVE FPI with bezel has two mikroBUS™ Shuttle connectors, a brand-new addition to the mikroBUS™ standard in the form of a 2x8-pin IDC header with 1.27mm (50mil) pitch. [mikroBUS™ Shuttle](#) extension board is an add-on board equipped with the conventional mikroBUS™ socket, which ensures compatibility with 894 [Click boards™](#).

### Awesome graphics on MCU driven TFT

Mikromedia 4 for STM32F2 CAPACITIVE FPI with bezel is a compact development board designed as a complete solution for the rapid development of multimedia and GUI-centric applications. By featuring a 4.3" TFT display with capacitive touch screen driven by the powerful graphics controller that can display the 24-bit color palette (16.7 million colors), along with a DSP-powered embedded sound CODEC IC, represents a perfect solution for any type of multimedia application.

### Develop-on & build-in the same board

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Mikromedia 4 for STM32F2 CAPACITIVE FPI with bezel is designed as the complete solution which can be implemented directly into any project, with no additional hardware modifications required. TFT display with bezel is ideal for handheld devices and for most applications, a nice stylish casing is all that is needed to turn the Mikromedia 4 for STM32F2 CAPACITIVE FPI with bezel development board into a fully functional, high-performance, feature-rich device. At its core, there is a powerful 32-bit [STM32F207VGT6](#) microcontroller, produced by STMicroelectronics, which provides sufficient processing power for the most demanding tasks.

## Specifications

Display size	4.3"   480x272px
Resolution	480x272px
Touch Screen	Capacitive
Frame Type	Bezel
Features	Buzzer,USB Type C,USB Host,SD Card,RF,ON/OFF switch,MP3,External DC source,Battery Powered,Battery for RTC,Batt. Chg. when OFF,Accel
Display type	mikromedia

## Downloads

[Mikromedia 4 for STM32F2 Capacitive FPI Manual](#)

[Mikromedia 4 for STM32F2 CAPACITIVE FPI with bezel example on libstock](#)

[Mikromedia 4 for STM32F2 Capacitive FPI with bezel 2D and 3D files](#)

[Mikromedia 4 for STM32F2 CAPACITIVE FPI with bezel schematic](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Display Modules](#) category:*

*Click to view products by [MikroElektronika](#) manufacturer:*

Other Similar products are found below :

[P6153-PR](#) [TDP0700T800480PCAP](#) [P6171DPR-DC-RS](#) [P6171DPR-DC-U](#) [MIKROMEDIA 4 FOR STM32F4 CAPACITIVE FPI](#)  
[MIKROMEDIA 3 FOR STM32F4 CAPACITIVE FPI](#) [TN0216ANVNANN-GN00](#) [TN0104ANVAANN-GN00](#) [TN0181ANVNANN-GN00](#)  
[MIKROMEDIA 5 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR PIC32MZ CAPACITIVE](#)  
[RVT43ULFNWC03 V4](#) [SM-RVT101HVBWCA0](#) [SM-RVT35HHBFWCA0](#) [SM-RVT35HHBNWCA0](#) [SM-RVT43HLBNWCA0](#) [SM-](#)  
[RVT50HQBFWCA0](#) [SM-RVT50HQBNWCA0](#) [SM-RVT70HSBFWCA0](#) [SM-RVT70HSBNWCA0](#) [11769](#) [MIKROMEDIA FOR DSPIC33](#)  
[MIKROMEDIA FOR PIC24](#) [MIKROMEDIA FOR PIC32](#) [MIKROMEDIA FOR STELLARIS M3](#) [MIKROMEDIA HMI 3.5 RES](#)  
[MIKROMEDIA HMI 5](#) [MIKROMEDIA PLUS FOR FT90X](#) [MIKROMEDIA PLUS FOR PIC32MX7 SHIELD](#) [MIKROMEDIA PROTO](#)  
[SHIELD](#) [MIKROMEDIA 5 FOR TIVA](#) [MIKROMEDIA 5 FOR TIVA SHIELD](#) [MIKROMEDIA 7 FOR STM32F4](#) [MIKROMEDIA](#)  
[CONNECT SHIELD](#) [MIKROMEDIA FOR ARM](#) [MIKROMEDIA FOR PSOC5LP](#) [MIKROMEDIA GAMING SHIELD](#) [MIKROMEDIA HMI](#)  
[4.3 UXB](#) [MIKROMEDIA HMI 5 RES](#) [MIKROMEDIA HMI 5 UXB](#) [MIKROMEDIA HMI 7](#) [MIKROMEDIA HMI BREAKOUT BOARD](#)  
[RVT70AQFNWC00](#) [18207](#) [PIS-0260](#) [GEN4-ULCD-50D-PI](#) [GEN4-ULCD-70D](#) [GEN4-ULCD-70D-PI](#) [ULCD-24PTU-AR](#)