

FEATURES

- Smaller mounting area
- Stainless steel dome material for long life and good click feel
- Suitable for mounting a narrow key pitch
- Suitable for SMT reflow soldering

APPLICATIONS

- Smartphones
- Digital cameras
- Gaming devices
- Other small electronic devices - consumer, medical



PART NUMBER CODE

Series	Earth Terminal	Height	Operating Force	Standard	Boss, Button	Packaging
<div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px;"></div> </div>	<div style="border: 1px solid black; width: 20px; height: 20px;"></div>	<div style="border: 1px solid black; width: 20px; height: 20px;"></div>	<div style="border: 1px solid black; width: 20px; height: 20px;"></div>	<div style="border: 1px solid black; padding: 2px;">H</div>	<div style="border: 1px solid black; width: 20px; height: 20px;"></div>	<div style="border: 1px solid black; width: 20px; height: 20px;"></div>
SOF	2 (with)	3 (2.0mm) 4 (1.0mm) 6 (1.5mm)	2 (1.6N) 8 (1.9N) 9 (3.8N)		S (with, circle) N (without, circle) F (with, square)	T (taping)

SPECIFICATIONS


Switch Type	SPST	Tactile
Electrical Characteristics	Rating (Resistive Load)	DC12V, 50mA
	Contact Resistance	1Ω or less
	Insulation Resistance	10MΩ or more
	Withstand Voltage	1 minute at AC 100V
Life		100,000 times

TYPE


Model Name	Model No.	Operating Force	Travel	Button	Boss	Mounting Height	Pcs/Reel
SOF-242HST	R 667074	1.6N	0.12mm	Circle	With	1.0mm	5,000
SOF-242HNT	R 667075	1.6N	0.12mm	Circle	Without	1.0mm	5,000
SOF-262HST	R 667076	1.6N	0.12mm	Circle	With	1.5mm	5,000
SOF-262HNT	R 667077	1.6N	0.12mm	Circle	Without	1.5mm	5,000
SOF-232HST	R 667078	1.6N	0.12mm	Circle	With	2.0mm	4,000
SOF-232HNT	R 667079	1.6N	0.12mm	Circle	Without	2.0mm	4,000
SOF-268HFT	R 667903	1.9N	0.12mm	Square	With	1.5mm	5,000
SOF-269HFT	R 667766	3.8N	0.12mm	Square	With	1.5mm	5,000

DIMENSIONS

Square Button

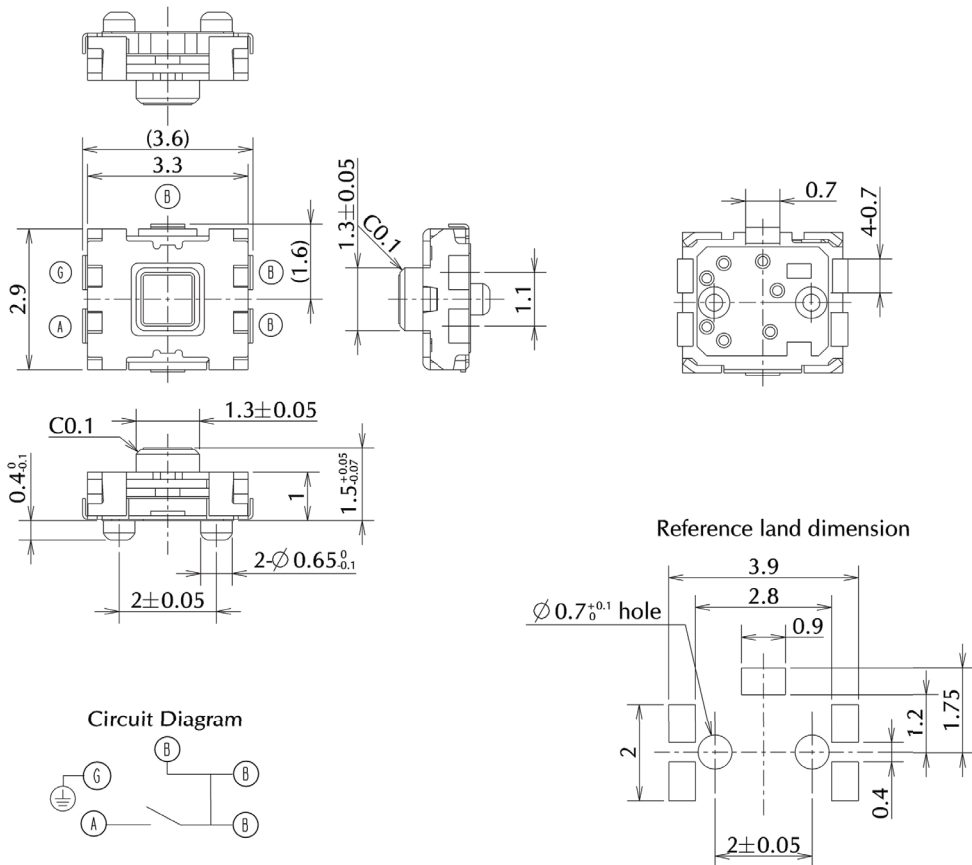

Circuit Diagram



Reference thickness of solder stencil:100 um

SOF SERIES

Tactile Switch With Button

MITSUMI

TACTILE SWITCHES


SLIDE SWITCHES

SWITCH SHEETS

SWITCH KITS

DIMENSIONS

Circle Button

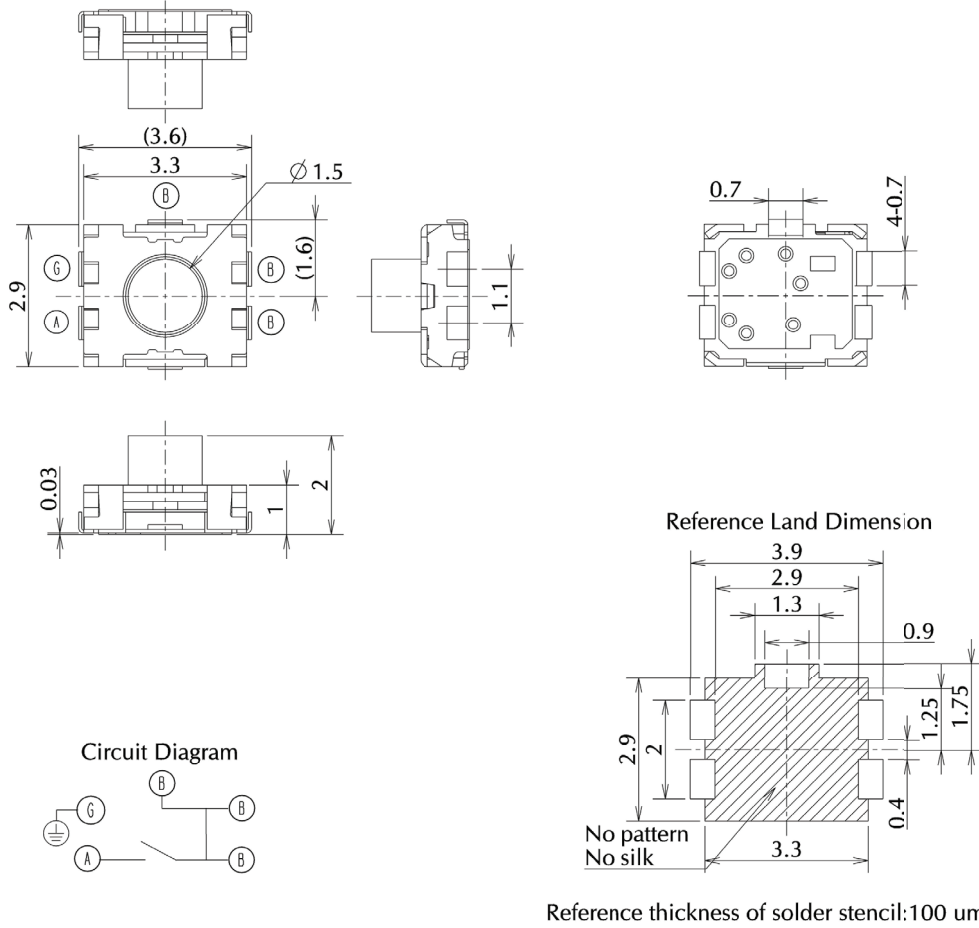

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [MinebeaMitsumi](#) manufacturer:

Other Similar products are found below :

[6407-250V-25273P](#) [ADTSA62NV](#) [B3F-3123](#) [1977177-8](#) [1977266-1](#) [ADTSA63NV](#) [ADTSM21NSVTR](#) [ADTSM25RVTR](#) [ADTSM32NVTR](#)
[ADTSMW64RV](#) [1977120-6](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [KSC241J SP DELTA LFS](#) [3FTL600RAS](#) [3FTL640RAS](#) [Y96K132V0FPLFS](#)
[09158](#) [6407-250V-25343P](#) [ADTSM31NVTR](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#) [TME1-01-Z](#) [Y651050400P](#) [KMT011MNGJLHS](#)
[ADTSG648NV](#) [ADTSM62KSVTR](#) [MJTP1138DTR](#) [ADTSM648NV](#) [95C06E3RAT](#) [3ATH9Q](#) [FSMRA8JHA04](#) [HARS0073](#)
[Y33R411N9FPLFT](#) [Y33R51139FPLFT](#) [Y31C01402FPLFS](#) [PTS645SK50SMTR92](#) [ADTSM32NVB](#) [KMS233GPWTFLG](#) [Y78B64124FP](#)
[Y33A812C5FP LFT](#) [Y56B2D120FP LFS](#) [PTS645 DVM83-BN125-2 LFS](#) [B3W 1000G](#) [B3F 1002C](#) [B3F 0047H](#) [B3W 1002C](#) [B3F 5001G](#)
[B3W 1100C](#) [1-1571563-4](#)