



SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM	Toroidal Coil Inductors	Description	TM100605N-302-P
PART NO.	302-98555	DATE	2019.09.12

(1) DIMENSION(UNIT:mm)

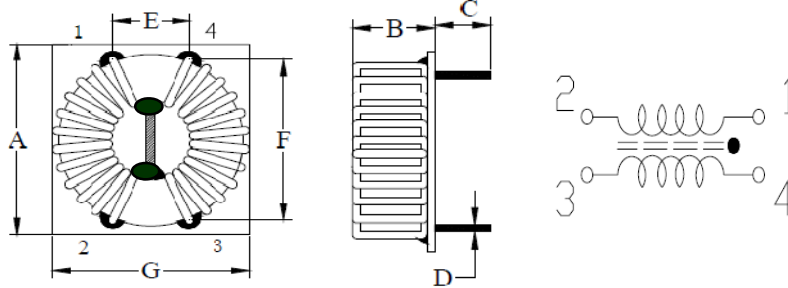

- 1.含浸凡立水
- 2.CORE與隔板 底板點黑膠固定.

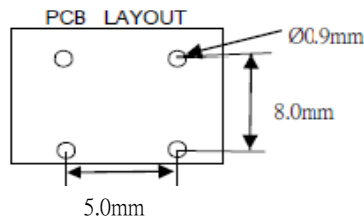

A	13.0(Max)	mm
B	10.0(Max)	mm
C	3.5 ± 0.5	mm
D	Ø0.4± 0.1	mm
E	5.0 ± 1.0	mm
F	8.0 ± 1.0	mm
G	13.0(Max)	mm
H		mm

(2) ELECTRICAL REQUIREMENTS

TEST CONDITION		FREQUENCY	(3) TEST INSTRUMENTS	
		VOLTAGE	LCR-METER:	
L_{1-2}	3.0mH ± 35%	10KHz	50mV	HP-4291A V WK3260B
L_{4-3}	3.0mH ± 35%	10KHz	50mV	LCR-METER: V WK3260B
DCR_{1-2}	60.0mΩ (Max)	KHz	V	DC RESISTANCE METER: V WK3260B
DCR_{4-3}	60.0mΩ (Max)	KHz	V	DC RESISTANCE METER: V WK3260B
IDC	2.0A(Max)	10KHz	50mV	CURRENT SOURCE: V TH2816B+1320

(4) TURNS: 20Ts(REF)

(5) MATERIAL LIST

ITEM	MATERIAL	DESCRIPTION
1	CORE	
2	WIRE	
3	VARNISH	
4	EPOXY	
5	隔板	
6	底板	
7	SOLDER	

REMARK:	APPROVED	CHECKED	DRAWN BY
	姜杰文	姜法寶	王艷

TEST DATA FOR PREPRODUCTION SAMPLES

CUSTOMER:				Part No.	302-98555		Test Q'ty:	10		PCS		
CUST P/N.				Description:	TM100605N-302-P			Date:	2019.09.12			
MEASURE ITEM	L _{1~2} (mH)	L _{4~3} (mH)	DCR _{1~2} (mΩ)	DCR _{4~3} (mΩ)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)			
SPECIFIC	3.0	3.0	60.0	60.0	13.0	10.0	3.5	5.0	8.0			
SUGGEST	±35%	±35%	Max	Max	Max	Max	±0.5	±1.0	±1.0			
1	3.20	3.20	49.2	49.2	12.02	8.02	3.52	5.05	8.05			
2	3.12	3.12	49.5	49.5	12.06	8.03	3.53	5.06	8.06			
3	3.05	3.05	49.2	49.2	12.05	8.05	3.51	5.03	8.09			
4	2.96	2.96	49.3	49.3	12.03	8.00	3.52	5.08	8.04			
5	2.95	2.95	49.6	49.6	12.04	7.99	3.50	5.02	8.06			
6												
7												
8												
9												
10												
X												
R												
TEST CONDITION	INSTRUMENTS:		WK3620B					AT:	10KHz	50mV		
	ENVIORNENTS:		TEMP:25 degree HUMDITY :65%									
	STORAGE TEMPERATURE RANGE					-40℃~+125℃						
	OPERATING TEMPERATURE RANGE					-40℃~+125℃						
REMARK:						APPROVED	CHECKED	DRAWN BY				
						姜杰文	姜法寶	王艷				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [MINGSTAR](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)