

Coaxial Adapter 3.5mm-F to 3.5mm-F

50Ω DC to 34 GHz

35F-35F50+



Generic photo used for illustration purposes only

CASE STYLE: DJ1733

Connectors	Model
3.5mm-Female	35F-35F50+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- flat response
- excellent VSWR, 1.05 typ. up to 18 GHz and 1.08 typ. up to 34 GHz
- low cost adapters, available from stock
- rugged stainless steel body, passivated
- 3.5 mm connector mates with SMA, K, 2.92 mm connectors


Applications

- interconnection of RF cable and equipment

Electrical Specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		34	GHz
Insertion Loss	DC - 34	—	0.13	—	dB
	DC - 18	—	1.05	1.25	
VSWR	DC - 26.5	—	1.07	1.25	:1
	DC - 34	—	1.08	1.25	

Outline Drawing


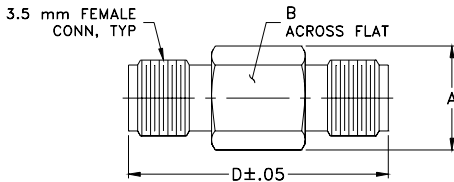


Outline Dimensions (inch/mm)

A	B	C	D	E	wt
.307	.274	--	.772	--	grams
7.80	6.96	--	19.61	--	3.0

Typical Performance Data

Frequency (GHz)	Insertion Loss (dB)	VSWR (:1)	
		3.5mm-F	3.5mm-F
0.05	0.01	1.00	1.00
0.1	0.01	1.00	1.00
0.5	0.02	1.02	1.02
1	0.03	1.02	1.02
2	0.05	1.04	1.04
3	0.06	1.05	1.05
4	0.07	1.06	1.06
5	0.07	1.06	1.05
10	0.10	1.03	1.04
15	0.13	1.07	1.05
16	0.18	1.12	1.11
18	0.17	1.21	1.21
20	0.19	1.19	1.20
22	0.15	1.10	1.10
24	0.22	1.02	1.04
26	0.13	1.06	1.08
28	0.20	1.16	1.18
30	0.12	1.19	1.20
32	0.19	1.12	1.11
34	0.18	1.04	1.02

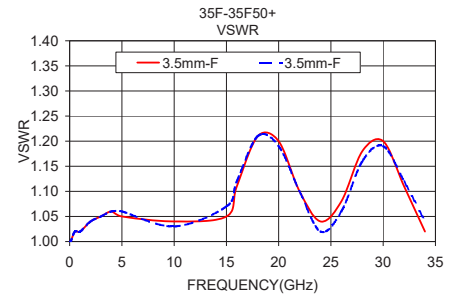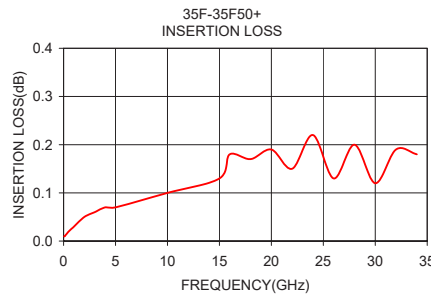

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
35F-35F50+
RS/TD/CP/AM
200602

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - In Series](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[5916-1103-603](#) [5918-1103-000](#) [5919-1503-000](#) [651A505](#) [82-5552](#) [9030-9523-502](#) [A0407000](#) [R114703000W](#) [R125704000](#) [R125771001](#)
[R141710000W](#) [R141723161](#) [R141730000](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161730000](#) [R161753000W](#) [R161791500W](#)
[R161791530W](#) [R201705000](#) [R222705200](#) [R222M40010W](#) [R223703180](#) [R316754000](#) [R405006000](#) [R443162000](#) [AD78TL](#) [HRM-513S](#)
[1996352-2](#) [2157155-1](#) [252169-75](#) [AD158](#) [2101130-1](#) [252186](#) [R114704000W](#) [R114720000W](#) [R125705001](#) [R125705701](#) [R125771000](#)
[R125771001W](#) [R125791501W](#) [R127704001](#) [R127.870.001](#) [R127872001](#) [R141717000](#) [R142710000](#) [R142723000](#) [R143703000](#) [R143704000](#)