

+5 to +30 dBm

Limiter

RLM-512-4WL+

50Ω Broadband 50 to 512 MHz

The Big Deal

- Very high CW input power, 4 W
- Very low limiting output power, ≤ 3 dBm typ.
- Very fast response time, 2 nsec



CASE STYLE: CK1246-1

Product Overview

The RLM-512-4WL+ protects against ESD and input power surges over a frequency range of 50 to 512 MHz, at power up to 4 W. Construction is on a micro strip low loss dielectric material and cased into a high volume, low cost package for cost efficiencies. Measuring 0.5 x 0.5 x 0.18" high, these tiny units provide excellent protection of low noise amplifiers in hostile environments where unwanted signals prevail, such as in manufacturing sites, train tunnels, etc.

Key Features

Feature	Advantages
Limiting abilities from 5 to +36 dBm RF input	Protects against strong undesired signals and prevents burn out of amplifiers and highly sensitive components
3 dBm typ. output power	Low power output prevents saturation of amplifiers following the limiter
Frequency coverage 50 to 512 MHz	Protection against many sources generating unwanted signals
Response time 2 nsec	Reacts almost instantaneously to limit unwanted high-level signals
Recovery time 8 nsec	Minimal downtime after unwanted signals are removed, with very quick restoration of standard operating levels
Small surface-mount package	Allows convenient placement in amplifiers incorporating this protective device
Low cost	Practical, low-cost solution to protect expensive amplifiers or other sensitive applications from burning out

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



+5 to +36 dBm

Limiter

50Ω Broadband 50 to 512 MHz

RLM-512-4WL+



Generic photo used for illustration purposes only

CASE STYLE: CK1246-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	5W

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	2
OUTPUT	10
GROUND	all others


Outline Drawing

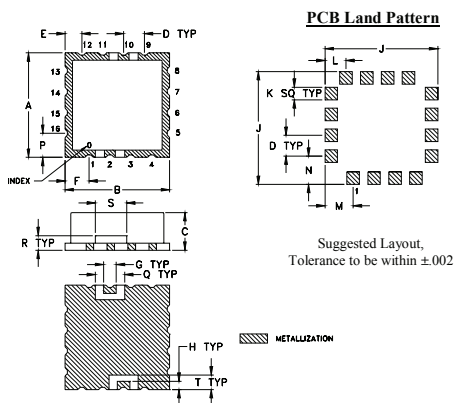

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52
L	M	N	P	Q	R	S	T	wt	
.100	.135	.135	.115	.140	.070	.150	.070	grams	
2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0	

Demo Board MCL P/N: TB-613+ Suggested PCB Layout (PL-343)

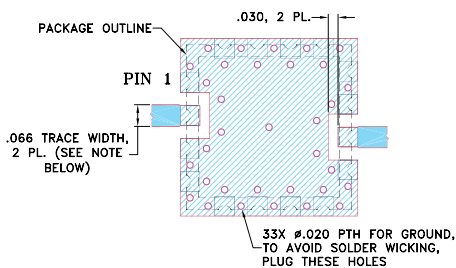

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.30" \pm .002"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.58 dB typ.
- very low output power 3 dBm typ. at 36 dBm input
- low cost
- aqueous washable

Applications







- military, hi-rel applications
- stabilizing generator outputs
- reducing amplitude variations
- protects low noise amplifiers and other devices from ESD or input power damage

Electrical Specifications

Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		50		512	MHz
Linear Range					
Max Input Power	less than 0.1 dB compression	—	—	-10	dBm
Insertion Loss	less than -10 dBm input power	—	0.6	1.5	dB
VSWR	less than -10 dBm input power	—	1.4	1.85	:1
Limiting Range					
Input Power	>1dB compression filtered signal frequency	+5	—	+36	dBm
Output Power		—	3	—	dBm
Δ Output/ Δ 1dB Input	Input Power Range (dBm)				
	5 to 15	—	0.21	—	dB/dB
	15 to 20	—	0.23	—	
	20 to 25	—	0.15	—	
25 to 36	—	—	—	—	
Recovery Time	1 watt pulse 50 μ sec PW 1 kHz duty cycle recovery to within 90% of final value.	—	8	—	nsec
Response Time	-30 to +30 dBm input 50 μ sec PW 1 kHz duty cycle	—	2	—	nsec

Typical Performance Data

Freq. (MHz)	I. Loss (dB) in Linear Range	VSWR (:1) in Linear Range	Power Output (dBm)					Δ Output / Δ 1dB Input			
			+5 dBm Input	+15 dBm Input	+20 dBm Input	+25 dBm Input	+36 dBm Input	+5 to +15 dBm Input	+15 to +20 dBm Input	+20 to +25 dBm Input	+25 to +36 dBm Input
50.00	0.40	1.15	-3.10	-3.16	-2.62	-1.73	-2.55	-0.006	0.11	0.18	-0.07
60.00	0.35	1.15	-2.98	-3.06	-2.35	-1.31	-1.53	-0.008	0.14	0.21	-0.02
70.00	0.32	1.16	-2.76	-2.72	-1.83	-0.76	-0.42	0.004	0.18	0.21	0.03
80.00	0.30	1.16	-2.51	-2.27	-1.15	-0.13	0.49	0.024	0.22	0.20	0.06
90.00	0.29	1.16	-2.25	-1.80	-0.52	0.36	1.17	0.045	0.26	0.18	0.07
100.00	0.29	1.16	-2.02	-1.24	0.07	0.60	1.63	0.078	0.26	0.11	0.09
120.00	0.29	1.16	-1.59	-0.42	1.00	1.66	2.29	0.117	0.28	0.13	0.06
140.00	0.30	1.17	-1.28	0.27	1.67	2.26	2.77	0.155	0.28	0.12	0.05
200.00	0.36	1.20	-0.73	1.45	2.73	2.97	3.57	0.218	0.26	0.05	0.05
300.00	0.44	1.26	-0.65	1.57	2.09	2.04	2.67	0.222	0.10	-0.01	0.06
400.00	0.53	1.32	-0.82	0.81	0.95	0.81	1.54	0.163	0.03	-0.03	0.07
500.00	0.63	1.39	-1.01	0.07	0.17	-0.02	0.69	0.108	0.02	-0.04	0.06
512.00	0.63	1.40	-0.99	0.00	0.12	-0.07	0.23	0.099	0.02	-0.04	0.03

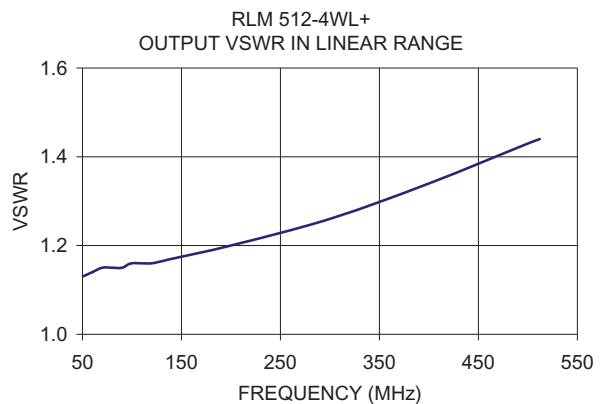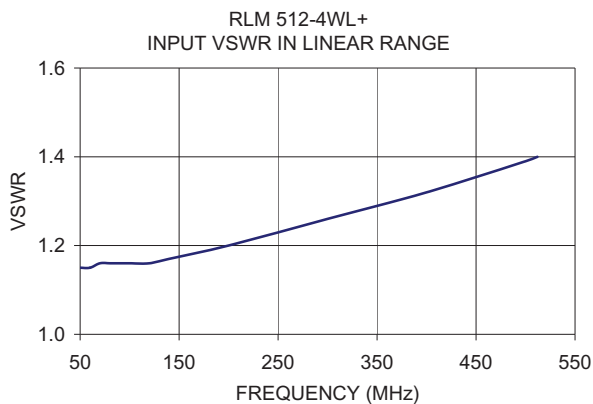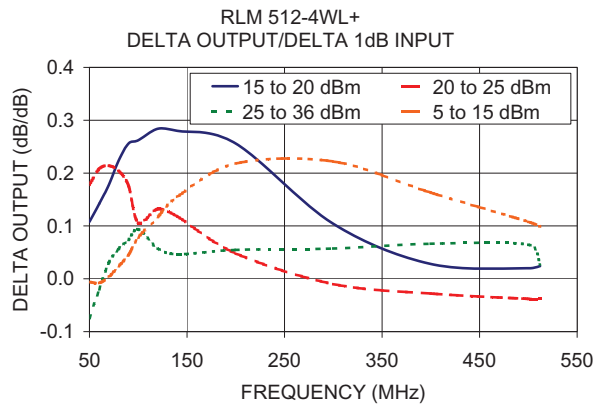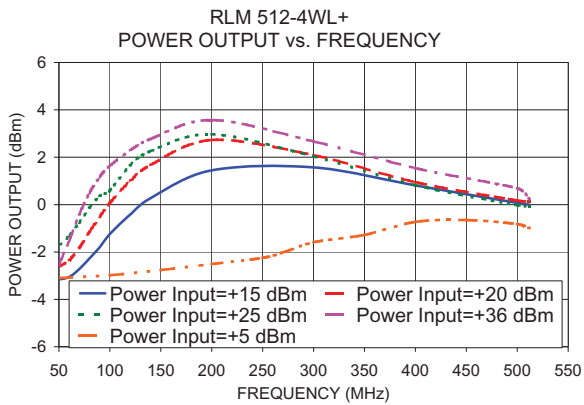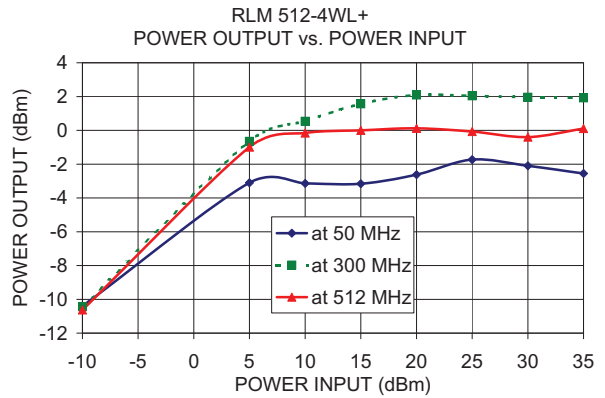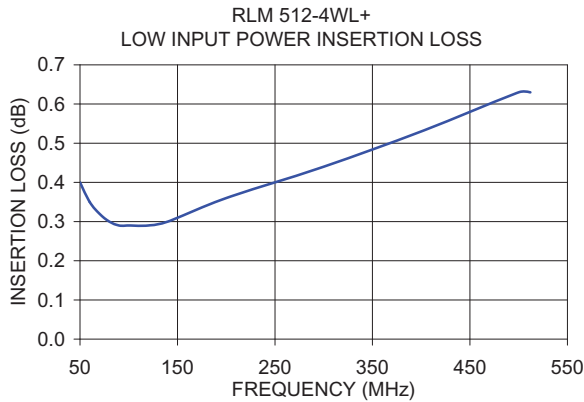

Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Wireless Misc](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[R415720000](#) [HMC598-SX](#) [RX98-4](#) [MABT-011000-14235P](#) [W2SW0001-SHLD](#) [HMC1110-SX](#) [HMC579-SX](#) [R417703118](#) [MA4BN1840-1](#)
[HMC443LP4ETR](#) [HMC561LP3ETR](#) [ADL5390ACPZ-REEL7](#) [ADA4304-2ACPZ-R2](#) [ADA4304-2ACPZ-R7](#) [ADA4304-3ACPZ-R2](#)
[ADA4304-4ACPZ-R2](#) [ADA4304-4ACPZ-R7](#) [ADA4304-3ACPZ-R7](#) [HMC760LC4B](#) [HMC577LC4B](#) [HMC370LP4E](#) [HMC443LP4E](#)
[HMC444LP4E](#) [HMC445LP4E](#) [HMC448](#) [HMC448LC3B](#) [HMC1096LP3ETR](#) [HMC561](#) [HMC573LC3BTR](#) [HMC575LP4](#) [HMC576](#)
[HMC576LC3BTR](#) [HMC578LC3B](#) [HMC578LC3BTR](#) [HMC578-SX](#) [HMC598](#) [HMC814](#) [HMC814LC3B](#) [HMC814LC3BTR](#) [SML1](#)
[MADRCC0004](#) [MADRCC0007](#) [MAX2045ETJ+](#) [CMX881E1](#) [SA606DK/01,118](#) [MAX1005CEE+](#) [MAX9990ETP+](#) [MADRCC0005](#)
[MADRCC0006](#) [HMC448LC3BTR](#)