

# Frequency Mixer WIDE BAND

## SIM-43H+

Level 17 (LO Power +17 dBm) 1000 to 4000 MHz



Generic photo used for illustration purposes only

CASE STYLE: HV1195

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	100mW

For extended temperature range, consult factory.  
Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

### Features

- wide bandwidth, 1000 to 4000 MHz, useable down to 800 MHz
- low conversion loss, 6.1 dB typ.
- excellent L-R isolation, 35 dB typ.
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected by US patent 7,027,795


### Applications

- cellular
- defense & weather radar
- defense communications
- PCN
- WCDMA
- WIFI
- blue tooth
- VSAT
- ISM

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

**Available Tape and Reel at no extra cost**  
Reel Size: 7" Devices/Reel: 10, 20, 50, 100, 200, 500


### Outline Drawing

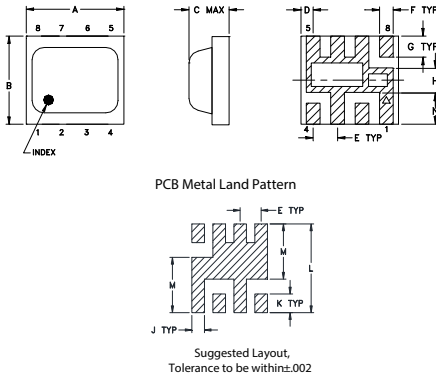

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.2098	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.050	.030	.043	.204	.127	0.065	grams
1.27	0.76	1.09	5.18	3.23	1.65	0.08

### Demo Board MCL P/N: TB-382 Suggested PCB Layout (PL-239)



- NOTES:
1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020"\*.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

### Electrical Specifications


FREQUENCY (MHz)	CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
	LO/RF $f_L-f_U$	IF	Typ. $\sigma$ Max.	Typ.	Min.	Typ.	Min.	
1000-4000	DC-1500		6.5 0.1 8.6	37	32	24	9	22
1000-2500			5.7 0.1 8.6	34	28	20	12	24

1 dB Compression: +14 dBm typ.  
\* Conversion loss at 30 MHz IF.  $\sigma$  is a measure of repeatability from unit to unit.

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
975.00	1005.00	7.97	35.59	22.55	2.35	2.23
1050.00	1080.00	7.48	39.31	23.71	2.71	1.56
1200.00	1230.00	6.87	42.50	27.13	3.04	1.22
1350.00	1380.00	6.46	40.87	31.37	3.16	1.61
1500.00	1530.00	6.32	38.93	35.59	3.10	1.65
1650.00	1680.00	6.49	36.73	30.94	2.99	1.83
1800.00	1830.00	6.62	38.21	23.39	2.59	1.74
2025.00	2055.00	6.45	36.69	14.20	2.47	1.16
2100.00	2130.00	6.56	36.90	13.59	2.46	1.14
2250.00	2280.00	6.91	37.09	14.23	2.57	1.48
2400.00	2430.00	6.43	36.52	16.01	2.21	1.83
2550.00	2580.00	7.46	37.89	17.58	2.91	1.75
2700.00	2730.00	6.37	36.23	20.10	2.43	1.82
2850.00	2880.00	6.12	32.81	21.75	1.93	1.70
3000.00	3030.00	5.65	36.85	25.56	1.52	1.73
3105.00	3135.00	5.57	35.17	31.30	1.40	1.85
3180.00	3210.00	5.54	35.28	37.78	1.33	1.73
3540.00	3570.00	6.45	33.40	22.10	1.86	1.71
3900.00	3930.00	7.66	32.59	17.74	2.54	2.44
4080.00	4110.00	7.54	34.81	18.91	2.65	3.28









### Electrical Schematic

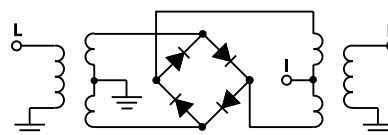

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



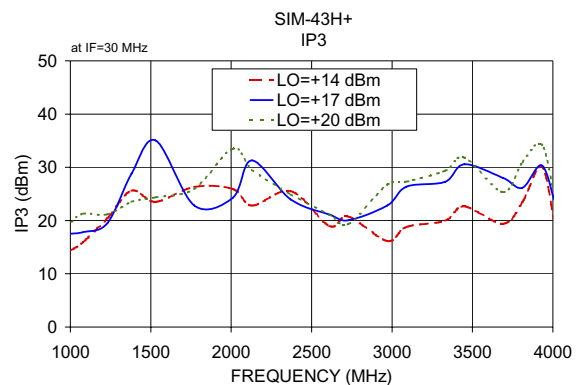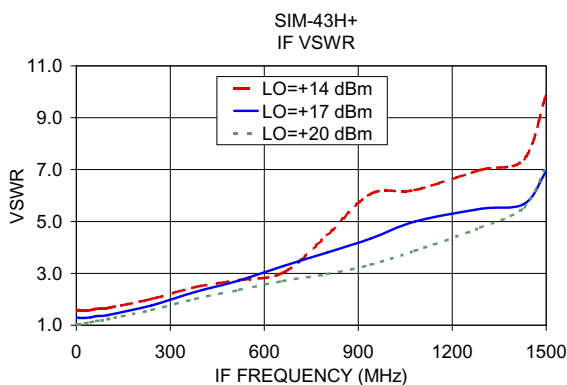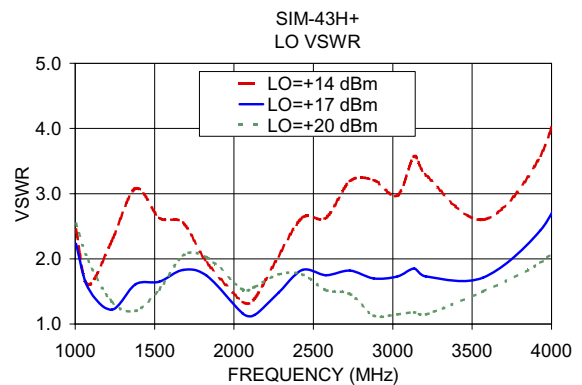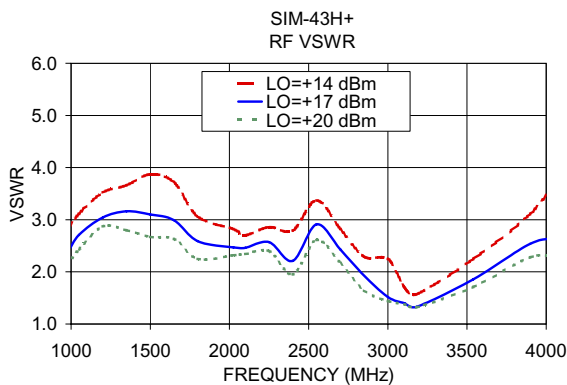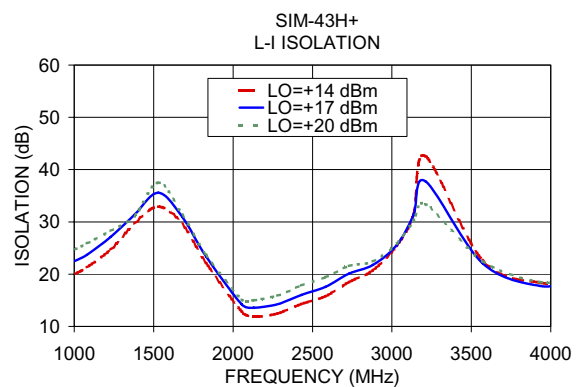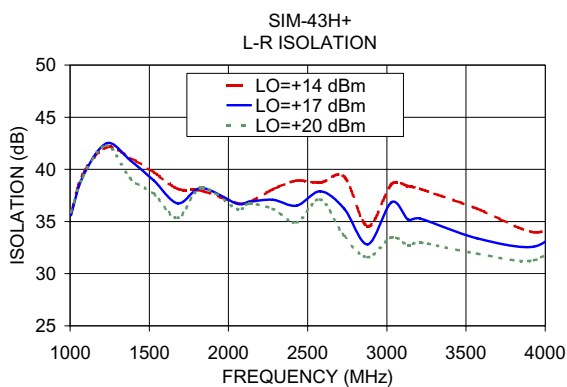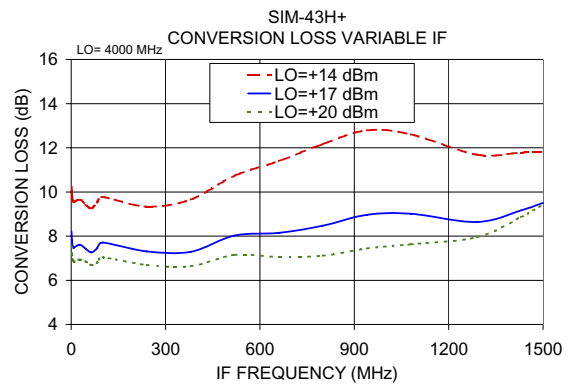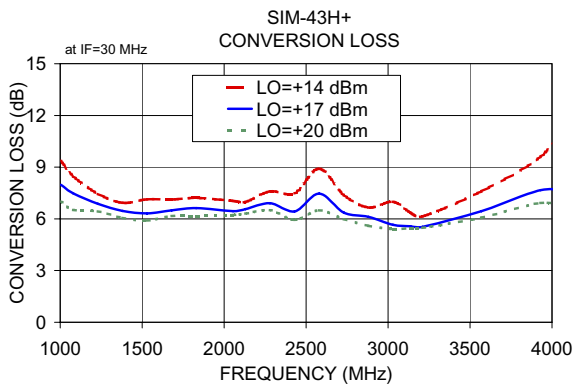

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Mixer](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[HMC337-SX](#) [mamx-009646-23dbm1](#) [MC4507-2](#) [HMC339-SX](#) [CSM5T](#) [CHR3664-QEG](#) [HMC8192-SX](#) [MIQ24MS-2](#) [HMC220BMS8GETR](#)  
[M85C](#) [M74C](#) [MD-174-PIN](#) [HMC554A-SX](#) [HMC521A-SX](#) [HMC521ACHIPS](#) [HMC558A](#) [HMC8191](#) [CMD258](#) [LT5511EFE](#) [MAMX-](#)  
[011023-SMB](#) [HMC399MS8TR](#) [HMC333TR](#) [HMC214MS8TR](#) [HMC175MS8TR](#) [HMC1043LC3TR](#) [MAMXSS0012TR-3000](#) [109728-](#)  
[HMC129LC4](#) [CSM2-13](#) [CSM1-13](#) [HMC785LP4ETR](#) [LT5526EUF#PBF](#) [LT5579IUH#PBF](#) [HMC773ALC3BTR](#) [HMC558ALC3B](#)  
[HMC329ALC3B](#) [MY63H](#) [SMA5101-TL-H](#) [AD8343ARUZ-REEL7](#) [AD608AR](#) [AD608ARZ](#) [AD831APZ-REEL7](#) [AD8342ACPZ-REEL7](#)  
[AD8343ARUZ](#) [AD8344ACPZ-REEL7](#) [ADL5363ACPZ-R7](#) [ADL5365ACPZ-R7](#) [ADL5802ACPZ-R7](#) [HMC1048ALC3B](#) [HMC1056LP4BE](#)  
[HMC1057-SX](#)