

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0015247063](#)  
**Status:** **Active**  
**Overview:** Mini-Fit Family Power Connectors  
**Description:** Mini-Fit BMI Receptacle Header, 4.20mm Pitch, Dual Row, Vertical, with Snap-In Plastic Pegs, 0.80µm Gold (Au), UL 94V-0, 6 Circuits

**Documents:**

|  |   |
|--|---|
| <a href="#">3D Model</a>                                       | <a href="#">Product Specification PS-5556-002-001 (PDF)</a>     |
| <a href="#">3D Model (PDF)</a>                                 | <a href="#">Packaging Specification PK-42385-999-001 (PDF)</a>  |
| <a href="#">Drawing (PDF)</a>                                  | <a href="#">Test Summary 423850000-TS-000 (PDF)</a>             |
| <a href="#">Product Specification 55560002-PS-CH-000 (PDF)</a> | <a href="#">Test Summary TS-5556-002-001 (PDF)</a>              |
| <a href="#">Product Specification 55560002-PS-ES-000 (PDF)</a> | <a href="#">Symbol Footprint Data SYM-A42385-06XX-001 (PDF)</a> |
| <a href="#">Product Specification 55560002-PS-SK-000 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>            |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**


|                |  |
|----------------|--|
| Product Family | PCB Receptacles                                  |
| Series         | <a href="#">42385</a>                            |
| Application    | Board-to-Board, Power, Wire-to-Board             |
| Comments       | Solder Type With Pegs                            |
| Overview       | <a href="#">Mini-Fit Family Power Connectors</a> |
| Product Name   | Mini-Fit BMI                                     |
| UPC            | 800754254373                                     |

**Physical**

|                                |                 |
|--------------------------------|-----------------|
| Circuits (Loaded)              | 6               |
| Circuits (maximum)             | 6               |
| Color - Resin                  | Natural (White) |
| Durability (mating cycles max) | 30              |
| Flammability                   | 94V-0           |
| Glow-Wire Capable              | No              |
| Guide to Mating Part           | Yes             |
| Keying to Mating Part          | None            |
| Lock to Mating Part            | None            |
| Material - Metal               | Brass           |
| Material - Plating Mating      | Gold            |
| Material - Resin               | Nylon           |
| Net Weight                     | 1.299/g         |
| Number of Rows                 | 2               |
| Orientation                    | Vertical        |
| PCB Locator                    | Yes             |
| PCB Retention                  | Yes             |
| PCB Thickness - Recommended    | 1.00mm          |
| Packaging Type                 | Tray            |
| Pitch - Mating Interface       | 4.20mm          |
| Pitch - Termination Interface  | 4.20mm          |
| Polarized to Mating Part       | Yes             |
| Polarized to PCB               | Yes             |
| Surface Mount Compatible (SMC) | No              |
| Temperature Range - Operating  | -40° to +105°C  |
| Termination Interface: Style   | Through Hole    |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 9.0A |
|-------------------------------|------|

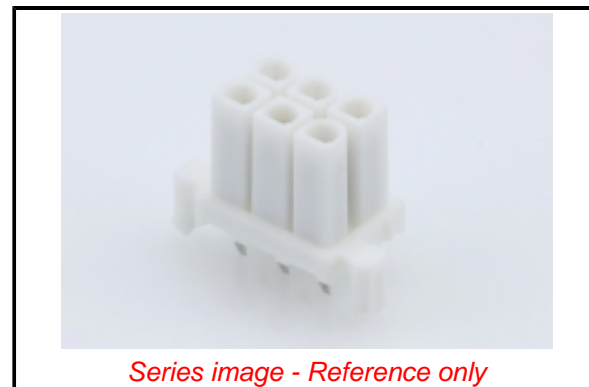

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[42385 Series](#)

**Mates With**

Panel Mount Plug [42475](#) <br>Right Angle  
Headers [42404](#) , [43810](#) <br>Vertical  
Headers [42440](#) , [43879](#) , [44068](#)

Grounding to PCB No  
Voltage - Maximum 600V AC (RMS)/DC

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 005  
Lead-free Process Capability WAVE  
Max. Cycles at Max. Process Temperature 001  
Process Temperature max. C 240

**Material Info**

Engineering Number 42385-06B2

**Reference - Drawing Numbers**

Packaging Specification PK-42385-999-001  
Product Specification 55560002-PS-CH-000, 55560002-PS-ES-000,  
55560002-PS-SK-000, PS-5556-002-001  
Sales Drawing SDA-42385-X-001  
Symbol/Footprint Data SYM-A42385-06XX-001  
Test Summary 423850000-TS-000, TS-5556-002-001

This document was generated on 12/13/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)