


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0311010040](#)
Status: **Active**
Overview: [H-DAC 64 Unsealed Connector System](#)
Description: [H-DAC 64 2.54mm 4 Way Vertical Header Assembly, Polarization A](#)

Documents:

3D Model	Application Specification AS-31067-100-001 (PDF)
3D Model (PDF)	Packaging Specification PK-31300-707-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-31100-0001-001 (PDF)	

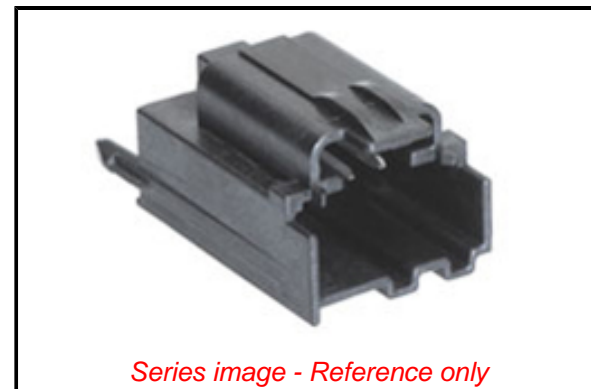

General

Product Family	PCB Headers
Series	31101
Application	Automotive, Power, Wire-to-Board
Comments	Polarization Option A, Black
Overview	H-DAC 64 Unsealed Connector System
Product Name	H-DAC 64
UPC	822350699792

Physical

Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Nickel
Material - Resin	Modified Polystyrene
Net Weight	1.754/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.68mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	1.524µm
Plating min - Termination	1.524µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Closed Ends
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +100°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	5.0A, 7.0A
-------------------------------	------------

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

[31101 Series](#)

Mates With

H-DAC 64, 4 Way Receptacle Assembly

Voltage - Maximum 500V DC

Solder Process Data

Duration at Max. Process Temperature (seconds) 030
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 003
Process Temperature max. C 250

Material Info

Reference - Drawing Numbers

Application Specification AS-31067-100-001
Packaging Specification PK-31300-707-001
Product Specification PS-31100-0001-001
Sales Drawing SD-31206-003-001

This document was generated on 02/01/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004147](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#)
[12052466](#) [12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#)
[12047957](#) [12047957-L](#) [12059473](#) [12066261](#)