

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0436500526**
Status: **Active**
Overview: Micro-Fit Connector System
Description: Micro-Fit 3.0 Vertical Header, 3.00mm Pitch, Single Row, 5 Circuits, with Solder Tab, Gold, Glow-Wire Capable, Black, Tape and Reel

Documents:

| | |
|-----------------------------------------------------------------|----------------------------------------------------------------|
| 3D Model (PDF) | Packaging Specification 708730000-PK-000 (PDF) |
| 3D Model | Test Summary 430450006-TS-000 (PDF) |
| Drawing (PDF) | Test Summary TS-43045-001-001 (PDF) |
| Product Specification 436500001-PS-JA-000 (PDF) | Test Summary TS-43045-002-001 (PDF) |
| Product Specification 436500001-PS-KO-000 (PDF) | Test Summary TS-46235-001-001 (PDF) |
| Product Specification 436500001-PS-SP-000 (PDF) | Datasheet (PDF) |
| Product Specification PS-43650-001 (PDF) | Symbol Footprint Data SYM-43650-0524-001 (PDF) |
| Packaging Specification 436500002-PK-000 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |


General

| | |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Family | PCB Headers |
| Series | 43650 |
| Application | Power, Wire-to-Board |
| Comments | <p>High Temperature Square Pin Solder Type<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. "*****"</p> |

| | |
|--------------|-----------------------------------|
| Overview | <u>Micro-Fit Connector System</u> |
| Product Name | Micro-Fit 3.0 |
| UPC | 800754778442 |

Physical

| | |
|--------------------------------|---------|
| Breakaway | No |
| Circuits (Loaded) | 5 |
| Circuits (maximum) | 5 |
| Color - Resin | Black |
| Durability (mating cycles max) | 30 |
| Flammability | 94V-0 |
| Glow-Wire Capable | Yes |
| Mated Height | 17.27mm |

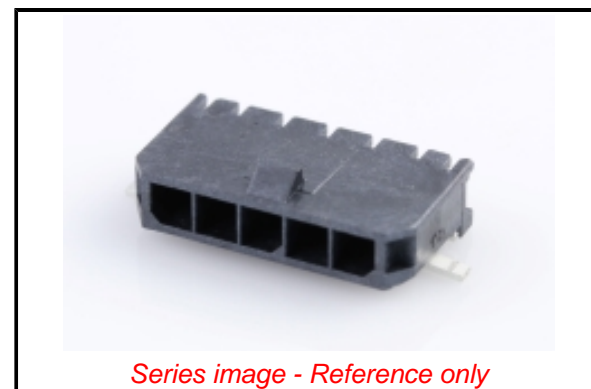

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

43650 Series

Mates With

Micro-Fit 3.0 Receptacle Housing [43645](#)

Micro-Fit 3.0 TPA Receptacle Housing [171850](#)
 Micro-Fit 3.0 Cable Assembly [2147502051](#) , [2147502052](#) , [2147502053](#) , [2147512051](#) , [2147512052](#) , [2147512053](#)

| | |
|------------------------------------------------|--------------------------------------------------------------------------------|
| Material - Metal | Brass |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 1.077/g |
| Number of Rows | 1 |
| Orientation | Vertical |
| PCB Locator | Yes |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Embossed Tape on Reel |
| Pitch - Mating Interface | 3.00mm |
| Plating min - Mating | 0.762µm |
| Plating min - Termination | 2.540µm |
| Polarized to PCB | Yes |
| Shrouded | Fully |
| Stackable | No |
| Temperature Range - Operating | -40° to +125°C |
| Termination Interface: Style | Surface Mount |
| Electrical | |
| Current - Maximum per Contact | 8.5A |
| Voltage - Maximum | 600V |
| Solder Process Data | |
| Duration at Max. Process Temperature (seconds) | 030 |
| Lead-free Process Capability | REFLOW |
| Max. Cycles at Max. Process Temperature | 003 |
| Process Temperature max. C | 260 |
| Material Info | |
| Reference - Drawing Numbers | |
| Packaging Specification | 436500002-PK-000, 708730000-PK-000 |
| Product Specification | 436500001-PS-JA-000, 436500001-PS-KO-000, 436500001-PS-SP-000, PS-43650-001 |
| Sales Drawing | SD-43650-009-001 |
| Symbol/Footprint Data | SYM-43650-0524-001 |
| Test Summary | 430450006-TS-000, TS-43045-001-001, TS-43045-002-001, TS-46235-001-001 |

This document was generated on 01/03/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)