

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5023520601](#)
Status: **Active**
Overview: [DuraClik Connector System](#)
Description: DuraClik Wire-to-Board Header, Single Row, Right-Angle, 6 Circuits, Tin (Sn) Plating, Black

Documents:

| | |
|---|--|
| Drawing (PDF) | Packaging Specification PK-502352-002-JP-001 (PDF) |
| 3D Model | Datasheet (PDF) |
| 3D Model (PDF) | RoHS Certificate of Compliance (PDF) |
| Product Specification PS-502351-001-001 (PDF) | |

Agency Certification

UL E29179


General

| | |
|----------------|--|
| Product Family | PCB Headers |
| Series | 502352 |
| Application | Automotive, Signal, Wire-to-Board |
| Comments | The Operating Temperature Range when used with DuraClik series 502351 is -40°C to +105°C. It is -40°C to 125°C when used with DuraClik ISL series 560123 or TPA series 505151. |
| Overview | DuraClik Connector System |
| Product Name | DuraClik |
| UPC | 887191427355 |

Physical

| | |
|--------------------------------|-----------------------|
| Breakaway | No |
| Circuits (Loaded) | 6 |
| Circuits (maximum) | 6 |
| Color - Resin | Black |
| Durability (mating cycles max) | 30 |
| First Mate / Last Break | No |
| Flammability | SC-0 |
| Glow-Wire Capable | No |
| Keying to Mating Part | Yes |
| Lock to Mating Part | Yes |
| Mated Height | 6.40mm |
| Material - Metal | Copper Alloy |
| Material - Plating Mating | Tin |
| Material - Resin | Polyamide |
| Net Weight | 0.772/g |
| Number of Rows | 1 |
| Orientation | Right Angle |
| PCB Locator | No |
| PCB Retention | Yes |
| Packaging Type | Embossed Tape on Reel |
| Pitch - Mating Interface | 2.00mm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Stackable | No |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | Surface Mount |

Electrical

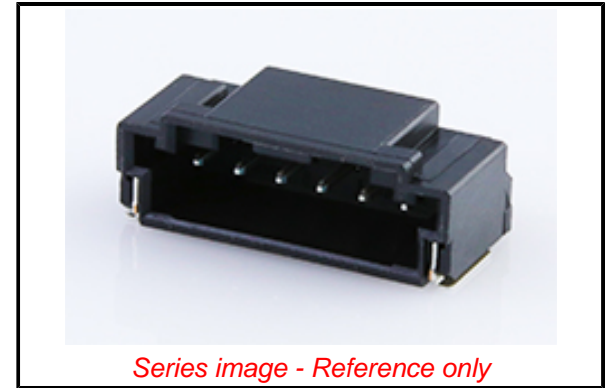

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

[502352](#) Series

Mates With

DuraClik Crimp Housings [502351](#) , [560123](#) , [505151](#)

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 3.0A |
| Voltage - Maximum | 125V |

Solder Process Data

| | |
|--|--------|
| Duration at Max. Process Temperature (seconds) | 040 |
| Lead-free Process Capability | REFLOW |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 255 |

Material Info

Reference - Drawing Numbers

| | |
|-------------------------|--------------------------------------|
| Packaging Specification | PK-502352-002-JP-001 |
| Product Specification | PS-502351-001-001 |
| Sales Drawing | SD-502352-001-001, SD-502352-002-001 |

This document was generated on 10/05/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)