


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0713085404](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, Surface Mount, Dual Row, Vertical, 4 Circuits, 1.50µm Minimum Bright Tin (Sn) Over Nickel (Ni) Plating, without PCB Locator Pegs

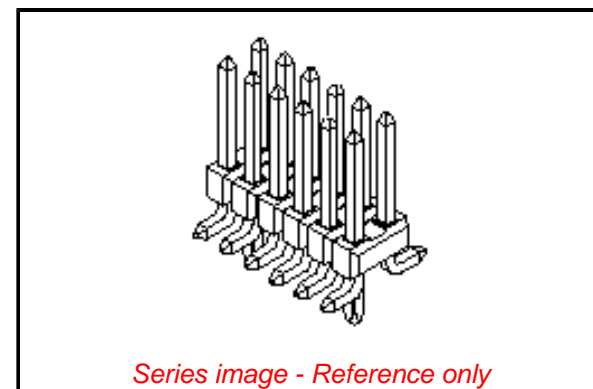

Series image - Reference only

Documents:

| | |
|--|---|
| 3D Model | Packaging Specification 713080001-PK-000 (PDF) |
| Drawing (PDF) | Packaging Specification 713080002-PK-000 (PDF) |
| 3D Model (PDF) | Packaging Specification 713080003-PK-000 (PDF) |
| Product Specification PS-71308-001 (PDF) | Packaging Specification PK-70873-0353-001 (PDF) |
| Application Specification 713080001-AS-000 (PDF) | RoHS Certificate of Compliance (PDF) |
| Packaging Specification 713080000-PK-000 (PDF) | |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|---|
| Product Family | PCB Headers |
| Series | 71308 |
| Application | Board-to-Board, Signal, Wire-to-Board |
| Overview | C-Grid Connector Products |
| Product Name | C-Grid |
| UPC | 883906267766 |

Physical

| | |
|--------------------------------|--------------------------------|
| Breakaway | Yes |
| Circuits (Loaded) | 4 |
| Circuits (maximum) | 4 |
| Color - Resin | Black |
| Durability (mating cycles max) | 50 |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Lock to Mating Part | None |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 0.240/g |
| Number of Rows | 2 |
| Orientation | Vertical |
| PCB Locator | Yes |
| PCB Retention | Yes |
| Packaging Type | Tube |
| Pitch - Mating Interface | 2.54mm |
| Polarized to PCB | No |
| Shrouded | No |
| Stackable | Yes |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | Surface Mount |

Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 3.0A |
| Voltage - Maximum | 250V |

Solder Process Data

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[71308 Series](#)

| | |
|--|--------|
| Duration at Max. Process Temperature (seconds) | 040 |
| Lead-freeProcess Capability | REFLOW |
| Max. Cycles at Max. Process Temperature | 003 |
| Process Temperature max. C | 260 |

Material Info

Reference - Drawing Numbers

| | |
|---------------------------|---|
| Application Specification | 713080001-AS-000 |
| Packaging Specification | 713080000-PK-000, 713080001-PK-000, 713080002-PK-000, 713080003-PK-000, PK-70873-0353-001 |
| Product Specification | PS-71308-001 |
| Sales Drawing | 713080000-SD-000 |

This document was generated on 08/31/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-](#)
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#)