

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0757571141](#)
Status: **Active**
Overview: MX150™ Unshrouded Header
Description: MX150 Dual Row Header, Vertical, 8 Circuits, 2.5µm Tin (Sn) Plating, 11.20mm Mating Pin Length, 3.05mm PC Tail Length

Documents:


3D Model	Product Specification PS-75757-000-001 (PDF)
Drawing (PDF)	Packaging Specification PK-36518-340 (PDF)
Product Specification PS-75757-000 (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	PCB Headers
Series	<u>75757</u>
3D Viewer	Yes
Application	Power, Wire-to-Board
CURRENT-MAX-NUMERIC	17.0
Comments	3.50 x 6.00mm dual row grid, 3.50 x 6.00mm dual row grid
Overview	<u>MX150™ Unshrouded Header</u>
PITCH-MATING-NUMERIC	3.50
Product Name	MX150
UPC	822350702348

Physical

Breakaway	No
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.017/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tube
Pitch - Mating Interface	3.50mm
Pitch - Termination Interface	3.50mm
Plating min - Mating	2.540µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +125°C
Termination Interface: Style	Through Hole

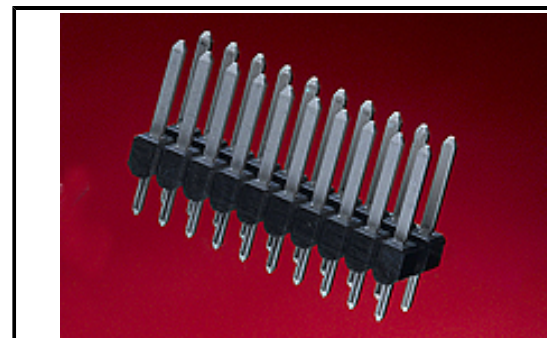

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/71/2019 (16 July 2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

[75757](#) Series

Mates With

[33472](#) Dual Row MX150 Receptacles

Electrical

Current - Maximum per Contact 17.0A
Voltage - Maximum 500V DC

Solder Process Data

Duration at Max. Process Temperature (seconds) 015
Lead-free Process Capability SMC&WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 260

Material Info**Reference - Drawing Numbers**

Packaging Specification PK-36518-340
Product Specification PS-75757-000, PS-75757-000-001
Sales Drawing SD-75757-002-001

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004147](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052466](#)
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)