


# Schottky Barrier Rectifiers




Using the schottky barrier principle with a molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

## Features:



- Low forward voltage.
- Low switching noise.
- High current capacity.
- Guarantee reverse avalanche.
- Guard-ring for stress protection.
- Low power loss and high efficiency.
- 150°C operating junction temperature.
- Low stored charge majority carrier conduction.
- Plastic material used carries Underwriters Laboratory Flammability classification 94V-O.

**16 Amperes  
40-45 Volts  
TO-220AB**

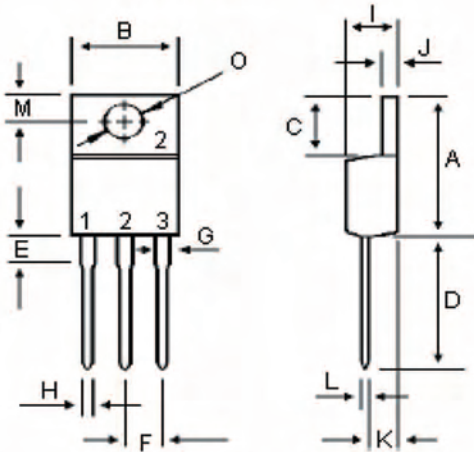

Dimensions : Millimetres

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	5.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90



**Common Cathode**

## Part Number Table

Description	Part Number
Schottky Barrier Rectifiers	MBR1640CT
Schottky Barrier Rectifiers	MBR1645CT

# Schottky Barrier Rectifiers



## Maximum Ratings

Characteristic	Symbol	MBR1640	MBR1645	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	40	45	V
RMS Reverse Voltage	$V_R (RMS)$	28	32	
Average Rectifier Forward Current (per diode) Total Device (Rated $V_R$ ), $T_C = 100^\circ C$	$I_F (AV)$	8.0 16		A
Peak Repetitive Forward Current (Rate $V_R$ , Square Wave, 20kHz)	$I_{FM}$	16		
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions half-wave, single phase, 60Hz)	$I_{FSM}$	150		
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150		$^\circ C$


## Electrical Characteristics

Characteristic	Symbol	MBR1640	MBR1645	Units
Maximum Instantaneous Forward Voltage ( $I_F = 8$ Amperes $T_C = 25^\circ C$ ) ( $I_F = 8$ Amperes $T_C = 100^\circ C$ )	$V_F$	0.55 0.48		V
Typical Thermal Resistance Junction to Case	$R_{\theta j-c}$	3.8		$^\circ C/W$
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25^\circ C$ ) (Rated DC Voltage, $T_C = 125^\circ C$ )	$I_R$	0.5 20		mA


# Schottky Barrier Rectifiers




Forward Current Derating Curve

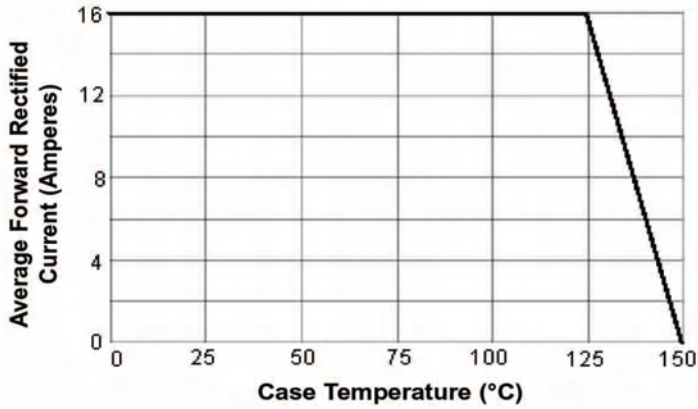

Peak Forward Surge Current

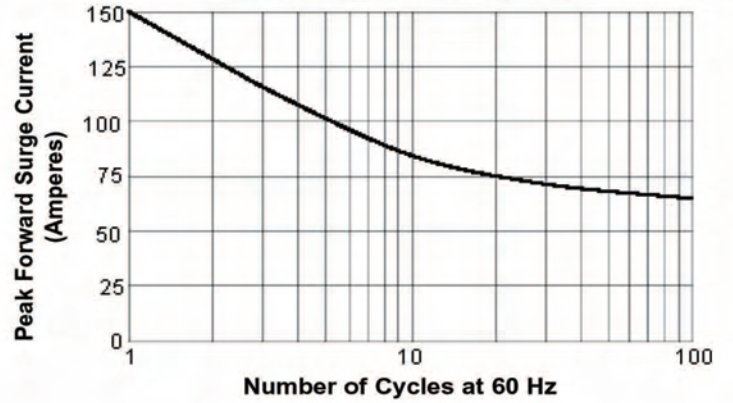

Typical Reverse Characteristics

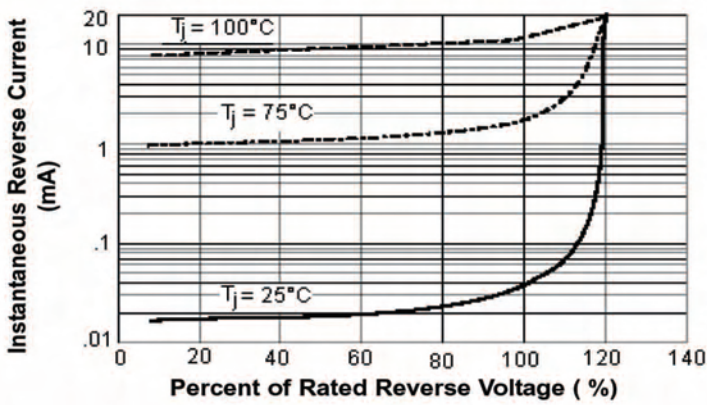

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multicomp](#) manufacturer:*

Other Similar products are found below :

[001-0001](#) [001-0003](#) [001-0006](#) [001-0014](#) [001-0017](#) [001-0020](#) [001-0021](#) [001-0023](#) [001-0028](#) [001-0029](#) [001-0030](#) [001-0031](#) [001-0035](#) [001-0037](#) [001-0041](#) [001-0076](#) [003-0001](#) [003-0002](#) [003-0003](#) [003-0011](#) [003-0012](#) [003-0013](#) [003-0015](#) [003-0039](#) [004-0012F](#) [004-0013F](#) [004-0014F](#) [004-0015F](#) [004-0016F](#) [004-0017F](#) [004-0018F](#) [006-0001F](#) [006-0012F](#) [006-0013F](#) [006-0045](#) [010-0001](#) [010-0001F](#) [010-0005](#) [010-0005F](#) [010-0011](#) [010-0014](#) [010-0024](#) [010-0024F](#) [010-0029](#) [010-0041](#) [010-0041F](#) [010-0042F3](#) [010-0055](#) [010-0055F](#) [010-0060](#)