


Datasheet of SAW Device

SAW Single Filter for ISM2.4G / Unbalanced / 5pin /1411

Murata PN: SAFEA2G45MC0F0A

- Feature
 - ➤ Coexistence Band40+38



Note: Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only.

Please also read caution at the end of this document.



Revision Number	Date	Description
SAFEA2G45MC0F0A_rev. A	Oct-03-2012	■ Initial Release/Updated for MP
SAFEA2G45MC0F0A_rev. B	Aug-18-2016	■ Updated General Information
SAFEA2G45MC0F0A_rev. C	Aug-28-2017	■ Updated General Information

- Operating temperature : -30 to +85 deg.C - Storage temperature : -40 to +85 deg.C

- Input Power : +28dBm, 20000 hours, 55deg.C

(*)Input signal shall be applied to Terminal number(1).

- D.C. Volatage between the terminals : 3V (25+/-2 deg.C)


Minimum Resistance between the terminals : 10M ohm
 RoHS compliance : Yes
 ESD (ElectroStatic Discharge) sensitive device



Package Dimensions & Recommended Land Pattern

unit: mm

Dimensions

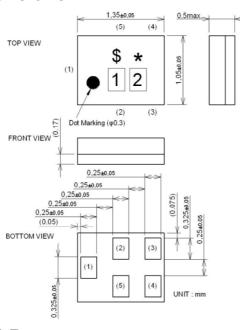

Marking: Laser Printing

*: Month code(Refer to the table A)
\$: Date code(Refer to the table B)

1 : U 2 : H


Terminal Number

(1): Unbalance Port (PA-side)(4): Unbalance Port (Ant.-side)


Others: GND

Notice) Please refer to Measurement Circuit for Port information in detail.

Land Pattern



Measurement Circuit (Top Thru View)

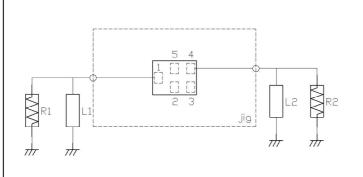

R1 : 50 ohm	L1 :4.3nH(Ideal inductor)					
R2 : 50 ohm	L2 :4.3nH(Ideal inductor)					



Electrical Characteristic < Single Filter >


Electrical Characteristic < Single Filter >											
					Cha	racteri	stics				
	Item			(-30 to +85 deg.C)			Unit	Note			
	- •				min.	typ.*	max.				
Center Frequency						2442	TITOS.	MHz			
Insertion Loss	2401.	to	2406.	MHz		2.7	4.8	dB			
	2401.	to	2406.	MHz		2.7	3.7	dB	+23 to +27deg.C		
	2406.	to	2411.	MHz		2.3	3.2	dB	1 20 to 12 deg.0		
	2406.	to	2411.	MHz		2.3	2.7	dB	+23 to +27deg.C		
	2411.	to	2483.	MHz		2.3	2.8	dB	1.20 to 1.27 deg.0		
	2411.	to	2483.	MHz		2.3	2.6	dB	+23 to +27deg.C		
	2401.	to	2483.	MHz		2.7	3.7	dB	+25 to +85deg.C		
Ripple Deviation	2401.	to	2483.	MHz		1.3	3.9	dB	1 20 to 10000g.0		
Tappie Bendueri	2401.	to	2483.	MHz		1.3	2.6	dB	+23 to +27deg.C		
	2406.	to	2483.	MHz		1.0	2.0	dB			
	2406.	to	2483.	MHz		1.0	1.8	dB	+23 to +27deg.C		
VSWR	2401.	to	2483.	MHz		1.6	2.0	dB	120 to 121 dog. 0		
	2401.	to	2483.	MHz		1.6	1.9	dB	+23 to +27deg.C		
Absolute Attenuation	10.	to	1559.	MHz	43	47		dB			
	1559.	to	1606.	MHz	42	46		dB			
	1710.	to	1785.	MHz	40	45		dB			
	1805.	to	1880.	MHz	40	44		dB			
	1850.	to	1990.	MHz	40	43		dB			
	2110.	to	2170.	MHz	40	44		dB			
	2300.	to	2320.	MHz	45	54		dB			
	2320.	to	2370.	MHz	37	44		dB			
	2370.	to	2380.	MHz	10	42		dB			
	2370.	to	2380.	MHz	16	42		dB	+23 to +27deg.C		
	2570.	to	2620.	MHz	42	46		dB	ĺ		
	2620.	to	2690.	MHz	40	44		dB			
	2690.	to	6000.	MHz	30	37		dB			
					ļ						
					ļ						
					ļ	ļ					
	-					<u> </u>					
	-					<u> </u>					
						<u> </u>					
	-										
	-										
	ĺ				I	I	ı		İ		


^{*} Typical value at 25±2deg.C



Electrical Characteristic

< Single Filter >

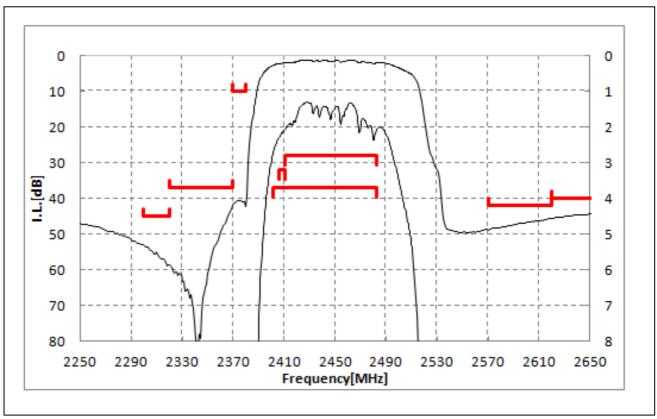


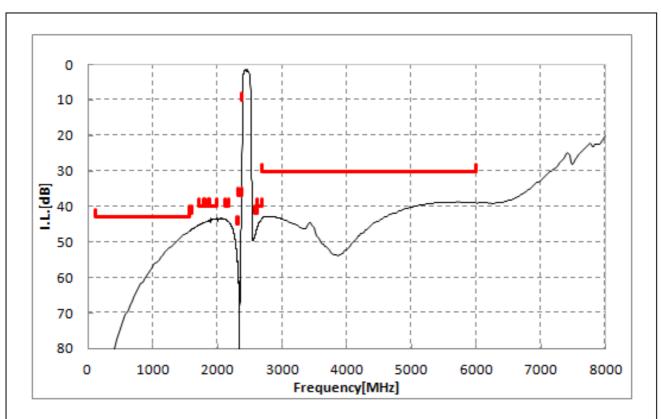




Dimensions of Tape & Reel unit: mm


Carrier Tape

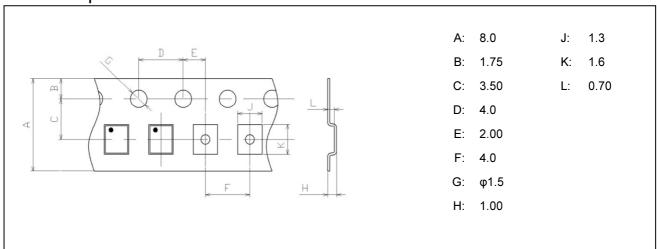

Tape

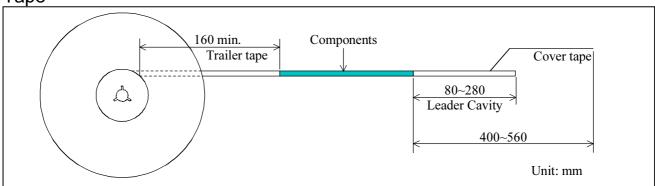

Reel

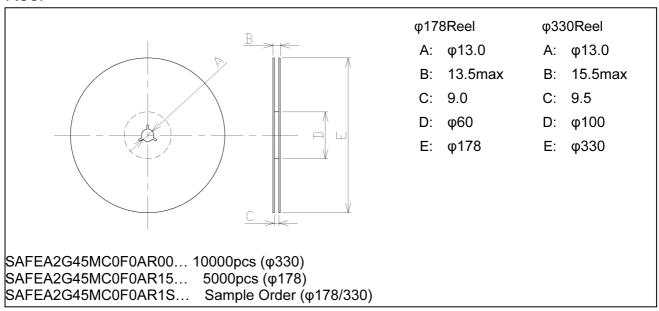



Marking Code

Τa	ah	le	Α:	M	on [.]	th	Cod	le
	~~	\cdot	<i>,</i>		\sim		\sim	\sim

2013	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2017 2021	Α	В	O	D	Е	F	G	Ι	٦	K	١	М
2014	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2018 2022	N	Р	Q	R	S	Т	U	٧	W	Х	Υ	Z
2015	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2019 2023	а	р	10	d	е	f	g	h	j	k	Q	m
2016	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2020 2024	n	P	G	r	4	t	a	٦	3	æ	y	3

Table B: Date Code

code	W	Χ	Υ	Z	а	b	c	d	е	f	g
date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	L	М	N	Р	Q	R	S	T	U	V	
date	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	Α	В	С	D	Е	F	G	Н	J	K	
date	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	

Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.



Important Notice (2/2)

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device.

When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use.

Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- •the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,
 - ·deviation or lapse in function of engineering sample,
 - ·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Murata manufacturer:

Other Similar products are found below:

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF HHS-109-PIN AFS14A35-1591.50-T3 DS-323-PIN 1A0220-3 JP510S

LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 AFS1575.42S4-T FM-104-PIN CER0813B

MAPDCC0005 3A325 40287 ATB3225-75032NCT BD0810N50100AHF JHS-115-PIN DC0710J5005AHF DC2327J5005AHF 43020

LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 RF1353C

051157-0000 PD0922J5050D2HF 1E1305-3 1F1304-3S 1G1304-30 B0922J7575AHF 10017-3 TP-103-PIN BD1222J50200AHF

BD1722J50100AHF 2450DP39K5400E BD0810J50150AHF BD1722J50200AHF DSS-113-PIN DS-327-PIN MACP-008125-CK07F0 DS-329-PIN