


# **Datasheet of SAW Device**

# SAW Single Filter for Band14 / Unbalanced / 5pin /1109

Murata PN: SAFFB763MAA0F0A

# Feature

- > For DRx
- > High TX Rejection
- High Out of Bands Rejection



Note: Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only.

Please also read caution at the end of this document.



Revision Number	Date	Description						
SAFFB763MAA0F0A_rev. A	Jan-22-2013	■ Initial Release						
SAFFB763MAA0F0A_rev. B	Jul-09-2013	■ Updated SPEC						
SAFFB763MAA0F0A_rev. C	Mar-27-2014	■ Updated for MP						
SAFFB763MAA0F0A_rev. D	Jul-21-2016	■ Updated General Information						
SAFFB763MAA0F0A_rev. E	Jun-20-2017	■ Updated General Information						

Operating temperature : -20 to +85 deg.C
 Storage temperature : -40 to +85 deg.C
 Input Power : +15 dBm 2000 h
 D.C. Volatage between the terminals : 3V (25+/-2 deg.C)
 Minimum Resistance between the terminals : 10M ohm


- RoHS compliance : Yes
- ESD (ElectroStatic Discharge) sensitive device



# Package Dimensions & Recommended Land Pattern

unit: mm

### **Dimensions**

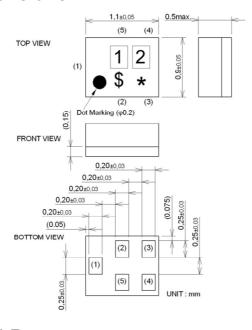

Marking: Laser Printing

\*: Month code(Refer to the table A)
\$: Date code(Refer to the table B)

1 : X 2 : W


#### **Terminal Number**

(1): Unbalanced port(4): Unbalanced port


Others: GND

Notice) Please refer to Measurement Circuit for Port information in detail.

### **Land Pattern**



# Measurement Circuit (Top Thru View)

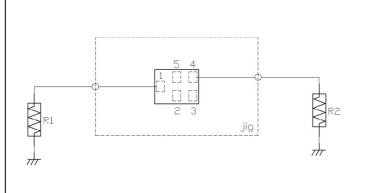

R1 : 50 ohm	
R2 : 50 ohm	



Electrical Characteristic < Single Filter >


Electrical Characteristic < Single Filter >												
					Characteristics							
	ltem				(-20 to +85 deg.C)			Unit	Note			
					min.	typ.*	max.					
Center Frequency						763		MHz				
Insertion Loss	758.	to	768.	MHz		2.0	2.4	dB				
	758.	to	768.	MHz		2.0	2.3	dB	+23 to +27deg.C			
Ripple Deviation	758.	to	768.	MHz		0.4	1.0	dB				
VSWR	758.	to	768.	MHz		1.5	2.0					
Absolute Attenuation	1.	to	698.	MHz	30	61		dB				
			30.	MHz	50	70		dB	RX-TX			
	698.	to	716.	MHz	35	69		dB	Lower 700 MHz Tx jammer			
	716.	to	728.	MHz	10	50		dB	B29			
	776.	to	787.	MHz	5.5	9.0		dB	Upper C block 700 MHz			
	788. 798.	to	798.	MHz	46 20	52 29		dB dB	TX			
			6000. 2304.	MHz	30	39		dВ	24			
	2274. 2400.		2504. 2500.	MHz	30	38		dВ	3f			
	4900.		5950.	MHz MHz	20	29		dВ	ISM2.4 ISM 5G			
	6064.		6144.	MHz	25	29		dB	8f			
	6822.		6912.	MHz	25	30		dB	9f			
	7580.		7680.	MHz	25	29		dB	10f			
	8338.		8448.	MHz	20	30		dB	11f			
	9096.		9216.	MHz	20	33		dB	111 12f			
	9854.		9984.	MHz	15	38		dB	13f			
	10612.		0752.	MHz	15	33		dB	14f			
	11370.		1520.	MHz	15	26		dB	15f			
	12128.		2288.	MHz	15	20		dB	16f			
		10							10.			
						ļ						
						ļ						
						<u> </u>						
	-											
	<u> </u>					1						
						<u> </u>						
						1						
L	1				l	<u> </u>			* Typical value at 2512dag C			


<sup>\*</sup> Typical value at 25±2deg.C



### **Electrical Characteristic**


# < Single Filter >

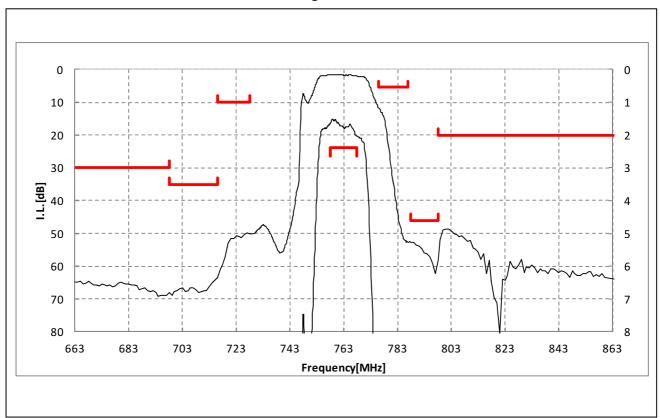

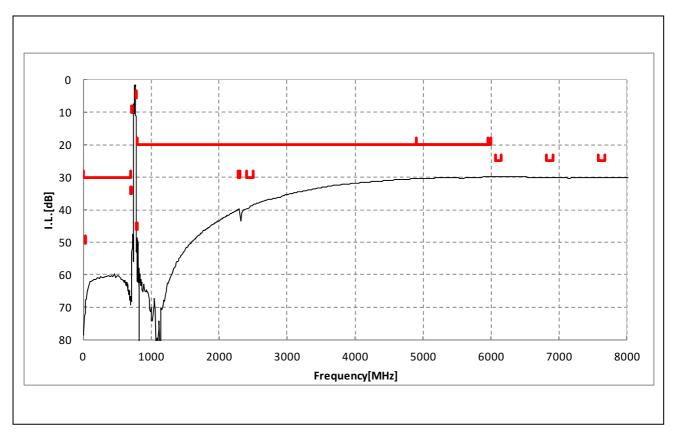


# Dimensions of Tape & Reel unit: mm


### **Carrier Tape**

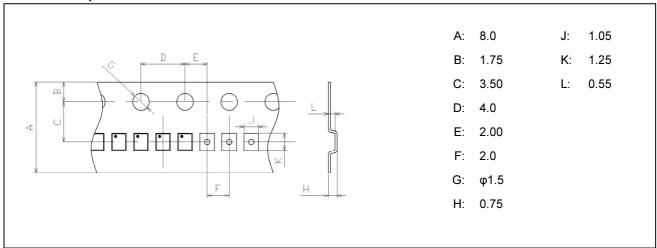

#### Tape

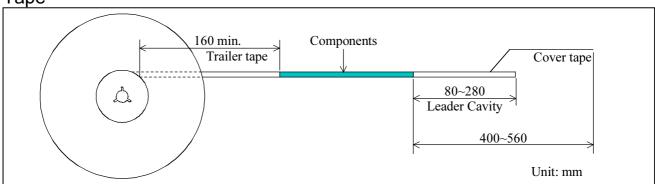

#### Reel

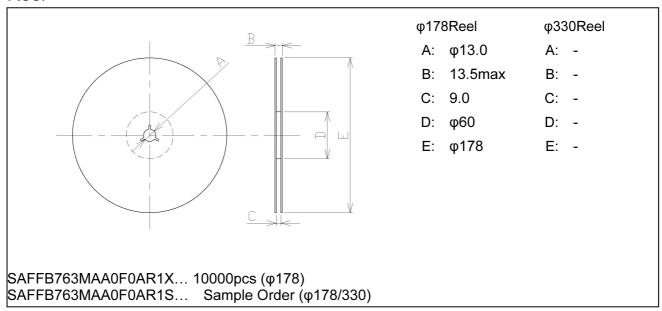



# Marking Code

#### Table A: Month Code

2013	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2017 2021	Α	В	C	D	Е	F	G	Ι	٦	К	L	М
2014	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2018 2022	Z	Р	Q	R	S	Т	J	<b>&gt;</b>	W	Х	Υ	Z
2015	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2019 2023	а	ь	10	đ	е	f	9,0	h	j	k	Q	m
2016	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2020 2024	c	P	G	r	4	t	a	5	3	æ	y	3

#### Table B: Date Code

date code	21st W	22nd X	23rd	24th	25th a	26th b	27th	28th	29th e	30th	31st <b>g</b>
code	L	М	N	Р	Q	R	S	Т	U	V	
date	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	Α	В	С	D	Е	F	G	Н	J	K	
date	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	

# Important Notice (1/2)

#### PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.



# Important Notice (2/2)

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device.

When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use.

Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- •the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,
  - ·deviation or lapse in function of engineering sample,
  - ·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Murata manufacturer:

Other Similar products are found below:

MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF DC4859J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN DSS-313-PIN B39321R801H210 B39321R821H210 B39921B4317P810 1A0220-3 2089-6207-00 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 1P510S CER0813B 3A325 40287 41180 ATB3225-75032NCT B69842N5807A150 BD0810N50100AHF BD2326L50200AHF BD2425J50200AHF HMC189AMS8TR C5060J5003AHF JHS-114-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2081E SF2194E SF2238E CDBLB455KCAX39-B0 RF1353C PD0922J5050D2HF