

Datasheet of SAW Device

SAW Dual Filter


for Band34_Band39 / 1in2out Balanced / LH /1511

Murata PN: SAWFD1G90AH0F0A



Feature

Input and Output Combined Type




Note : Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only. Please also read caution at the end of this document.



Revision Number	Date	Description						
SAWFD1G90AH0F0A_rev. A	Jan-11-2013	■ Initial Release						
SAWFD1G90AH0F0A_rev. B	Jul-03-2013	Updated Typical value/for MP						
SAWFD1G90AH0F0A_rev. C	Aug-23-2016	Updated General Information						
SAWFD1G90AH0F0A_rev. D	Aug-25-2017	Updated General Information						

- Operating temperature : -30 to +85 deg.C
- Storage temperature : -40 to +85 deg.C
- Input Power
- : +13 dBm 2000 h
- D.C. Volatage between the terminals : 3V (25+/-2 deg.C)
- Minimum Resistance between the terminals : 10M ohm : Yes
- RoHS compliance
- ESD (ElectroStatic Discharge) sensitive device



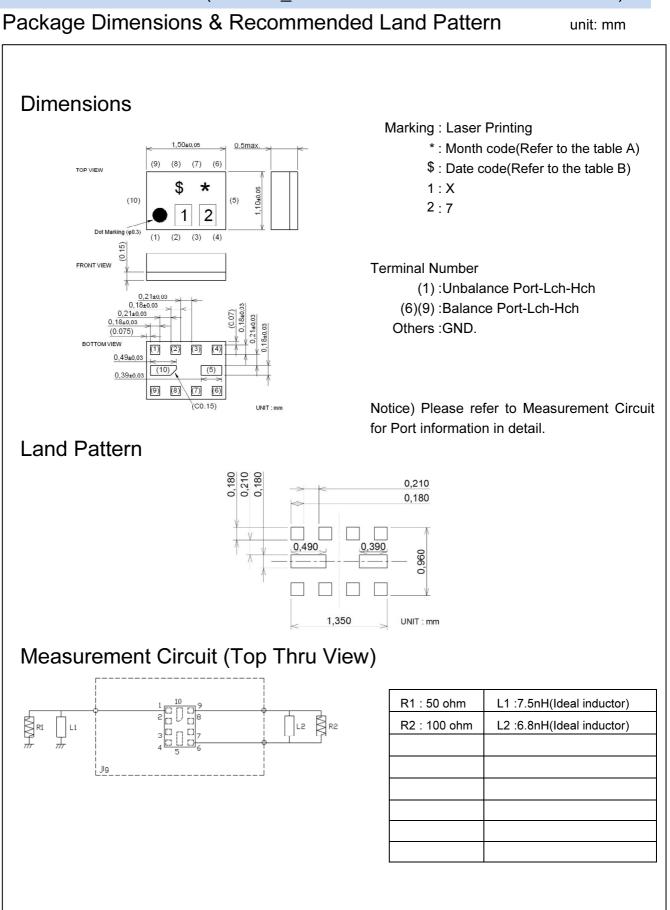




Electrical Characteristic < Low/High Freq. Filter >

	ltem				(-30)	(-30 to +85 deg.C)		Unit	Note	
					min.	typ.*	max.			
Center Frequency	1000	4	1000	MI 1-		1900	0.7	MHz		
Insertion Loss	1880. 1880.	to	1920. 1920.	MHz MHz		2.2 2.2	2.7 2.6	dB dB	+23 to +27deg.C	
Ripple Deviation	1880.	to	1920.	MHz		0.4	1.2	dB	+23 t0 +27deg.C	
	1880.	to to	1920.	MHz		0.4	1.2	dB	+23 to +27deg.C	
VSWR	1880.	to to	1920.	MHz		1.4	2.0	uD	+23 to +27deg.c	
Amplitude Balance	1880.	<u>to</u> to	1920.	MHz	-4.0	3.4	4.0	dB		
Phase Balance	1880.	to	1920.	MHz	202	197	158	deg.		
Absolute Attenuation	1000.	to	1395.	MHz	30	38	100	dB		
	1395.	to	1435.	MHz	30	37		dB		
	1435.	to	1805.	MHz	20	28		dB		
	1805.	to	1840.	MHz	20	31		dB		
	1840.	to	1850.	MHz	13	23		dB		
	1840.	to	1850.	MHz	15	23		dB	+23 to +27deg.C	
	2000.	to	2135.	MHz	1.5	2.5		dB	12010127069.0	
	2135.	to	2175.	MHz	30	39		dB		
	2135.	to to	3500.	MHz	25	33		dB		
	3500.	to	6000.	MHz	25	33		dB		
Center Frequency		ιΟ	5500.		20	2017.5		MHz		
Insertion Loss	2010.	to	2025.	MHz		2.7	3.1	dB		
LOGO	2010.	to to	2025.	MHz		2.7	3.0	dB	+23 to +27deg.C	
Ripple Deviation	2010.	to	2025.	MHz		0.2	1.3	dB	- 20 to + 27 deg.0	
Tappic Deviation	2010.	to to	2025.	MHz		0.2	1.0	dB	+23 to +27deg.C	
VSWR	2010.	to	2025.	MHz		1.3	2.0	чD	123 to 127deg.c	
Amplitude Balance	2010.	to	2025.	MHz	-1.0	0.2	1.0	dB		
Phase Balance	2010.		2025.	MHz	165	189	195	deg.		
Absolute Attenuation	10.	to to	1805.	MHz	20	28	135	dB		
Absolute Attenuation	1805.	to to	1850.	MHz	15	23		dB		
	1850.	to to	1950.	MHz	1.0	2.0		dB		
	1950.	to	1980.	MHz	3.0	15.0		dB		
	1950.	to	1980.	MHz	5.0	15.0		dB	+23 to +27deg.C	
	2050.	to	2075.	MHz	2.0	5.0		dB	+23 to +27deg.C	
	2030.	to	2100.	MHz	2.0	29		dB		
	2075.	to	3500.	MHz	25	33		dB		
	3500.	to	4060.	MHz	23	33		dB		
	4060.	to	5000.	MHz	20	34		dB		
	5000.	to	5500.	MHz	26	34		dB		
	5500.	to	6000.	MHz	25	33		dB		
	3300.	to	0000.		25	- 55		ub		
	1								* Typical value at 25+2deg C	


* Typical value at 25±2deg.C



Electrical Characteristic

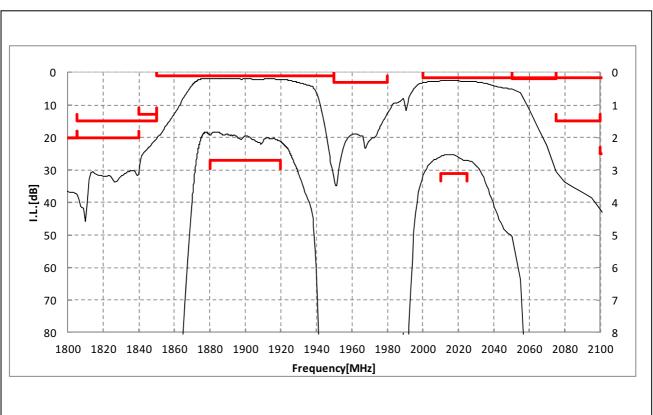




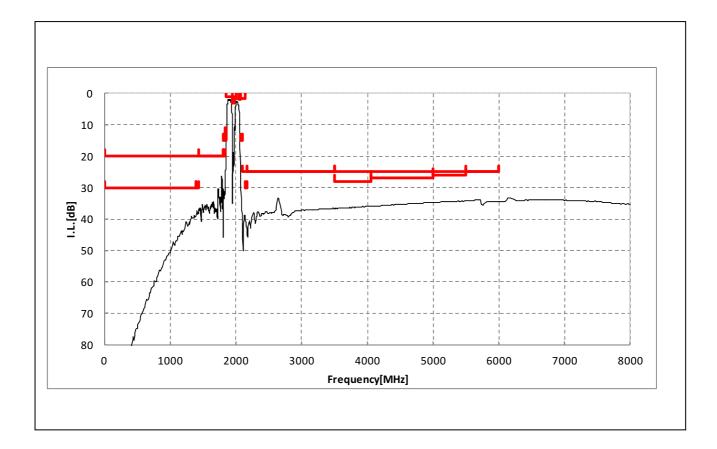




Dimensions of Tape & Reel unit: mm


Carrier Tape

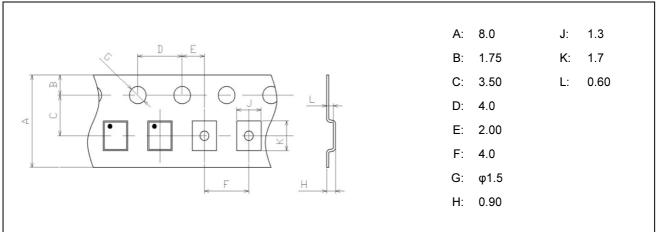

Tape

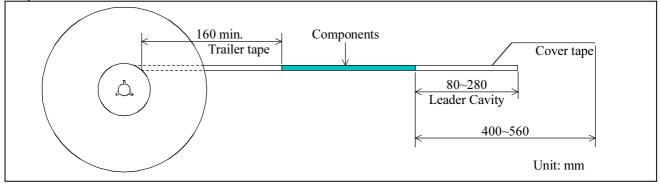

Reel

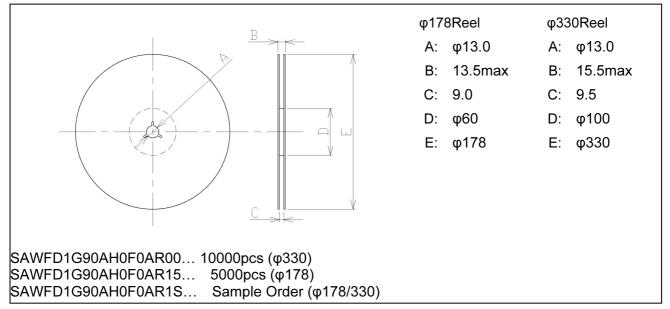



Marking Code

Table A: Month Code

~													
Γ	2013	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2017 2021	Α	В	С	D	Е	F	G	н	J	к	L	м
Γ	2014	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2018 2022	N	Ρ	Q	R	S	Т	U	V	¥	х	Y	Z
Γ	2015	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2019 2023	а	b	īc	d	е	f	g	h	j	k	l	m
Γ	2016	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
	2020 2024	n	p	Ŷ	r	ł	t	a	U	3	¥	y	8

Table B: Date Code

date	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	
code	А	В	С	D	E	F	G	Η	J	К	
date	11th	12th	13th	14th	15th	16th	17th	18th	19th	20th	
code	L	М	Ν	Р	Q	R	S	Т	U	V	
date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	W	Х	Y	Z	а	b	ō	d	е	f	g

Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specified in this specification.

Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.



Important Notice (2/2)

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device. When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use. Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

•the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,

·deviation or lapse in function of engineering sample,

·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages. If you can't agree the above contents, you should inquire our sales.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Murata manufacturer:

Other Similar products are found below :

MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF DC4859J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN DSS-313-PIN B39321R801H210 B39321R821H210 B39921B4317P810 1A0220-3 2089-6207-00 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 1P510S CER0813B 3A325 40287 41180 ATB3225-75032NCT B69842N5807A150 BD0810N50100AHF BD2326L50200AHF BD2425J50200AHF HMC189AMS8TR C5060J5003AHF JHS-114-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2081E SF2194E SF2238E CDBLB455KCAX39-B0 RF1353C PD0922J5050D2HF