

SPECIFICATIONS:
 Current rating:3.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:30m ohm MAX
 Insulation resistance:5000M ohm MIN
 Withstanding voltage:1000V AC for one minute
 Operating temperature range:-40°C~+85°C

MATERIAL AND FINISH
 Insulator:PBT+30%G.F(UL94V-0)
 Contact:Copper Alloy Nickel Undercoated Selective Gold Plated
 Finish:Metal Iron With Tin Plated



PART NO.:

Z-SUB HP * F * * 7 * * * *

- NO. OF CONTACTS
 - B=15PIN
 - D=26PIN
 - F=44PIN
 - D=62PIN
- LOGO
 - 0=NO LOGO
 - 2=NEXTRON LOGO
- INSULATOR COLOR
 - 0=BLACK
 - 6=BLUE
 - 9=WHITE
- INSULATOR MATERIAL
 - 0=PBT
 - 2=NYLON
- CONTACT PLATED:(CONTACT AREA)
 - 1=FULL GOLD 1u"
 - 2=GOLD 3u"
 - 3=GOLD 5u"
 - 4=GOLD 10u"
 - 5=GOLD 15u"
 - 6=GOLD 30u"
- CONTACT MATERIAL
 - 7=PHOSPHOR BRONZE

NUT POST HEIGHT(H)
 0=5.8mm
 1=4.8mm

62P	54.84	63.50	69.32	2.41	7.92	12.50
44P	38.38	47.04	53.04	2.29	7.92	12.50
26P	24.66	33.32	39.14	2.29	7.92	12.50
15P	16.33	24.99	30.81	2.29	7.92	12.50
POS. NO.	A	B	C	D	E	F
	DIMENSION					

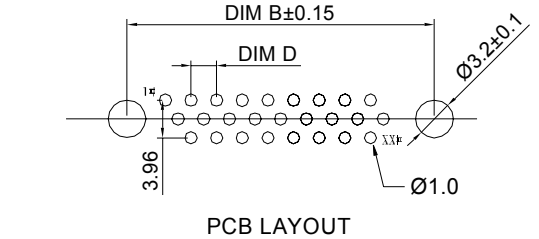

B	ECN-19105	Δ=1	2019/11/15
A	NEW RELEASED		2016/07/16
REV.	DESCRIPTION	DATE	ANGLES

UNITS: ■ mm □ inch	SIZE A3	NAME: D-SUB 焊接式 PCB 母端	 NEXTRONICS ENGINEERING CORP.								
GENERAL TOLERANCE: (UNLESS SPECIFIED)		PART NO: Z-SUBHPXFX7XXXX	TITLE: CUSTOMER DWG								
4 PLACE ± ** ±. **	3 PLACE ± ** ±. **	APPD:	DWG NO: 010-0000-M85								
2 PLACE ± 0.20 ±. **	1 PLACE ± 0.30 ±. **	CHKD:	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/1</td> <td>B</td> </tr> </table>			SCALE	SHEET	REV.	1/1	1/1	B
SCALE	SHEET	REV.									
1/1	1/1	B									
DESIGN: Lu陳惠枝	2019/10/29										

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Nextronics](#) manufacturer:

Other Similar products are found below :

[DCM37S732N](#) [DAM15P500](#) [DEV09S364GTLF](#) [DEM09P032N](#) [DDM50P732N](#) [DAM15S332N](#) [173109-2218](#) [173109-2466](#) [173109-2436](#)
[173109-2435](#) [56F706-005-LI](#) [56F711-015](#) [015-0341-000](#) [015-0372-008](#) [015-8544-011](#) [017041-0005](#) [020419-0104](#) [012-0515-000](#) [012-9507-](#)
[034](#) [012-9507-114](#) [012-9534-001](#) [020745-0008](#) [609-25P](#) [M24308/2-23Z](#) [M243082310F](#) [M243082410F](#) [M243082411F](#) [M24308/4-21](#)
[CT1A18-11PSA206](#) [CT1N36-5SC](#) [CT2-16S-17PS](#) [CT2-20-15PCAU](#) [CT2-24-12PS](#) [CT2-24-28PSF127A206](#) [CT2-32-9PC](#) [CT6F9767-14-4-](#)
[14S-5PC](#) [CT6FA10SL-4PS](#) [CT7-18-10SC](#) [CT7-18-10SCAU](#) [CT7-18-12SCAU](#) [CT7-18-1PC](#) [CT7-18-1PCAU](#) [CT7-18-21SCAU](#) [M83513/01-](#)
[FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [69001-865](#) [6STD09PCM99B70X](#) [6STD09SCM99B30X](#) [6STD09SCT99S40X](#)