Crystal Units

NX3225GA

Features

A small surface-mount type crystal unit, especially suited for small-sizing requirements.

- •Compact and thin. (3.2 x 2.5 x 0.75 mm typ.)
- •Excellent environmental characteristics, including heat and shock resistance.
- •Excellent electrical performance for OA (office automation) and AV (audiovisual) applications.
- •Meets the requirements for re-flow profiling using lead-free solder.




RoHS Compliant Directive 2011/65/EU

Specifications

Item Model	NX3225GA
Nominal Frequency	9.840 to 50 MHz
Overtone Order	Fundamental
Frequency Tolerance (25 ±3 °C)	±20 × 10 ⁻⁶
Frequency versus Temperature Characteristics (with reference to +25 °C)	±30 × 10 ⁻⁶
Operating Temperature Range	−40 to +85 °C
Storage Temperature Range	−40 to +85 °C
Equivalent Series Resistance	Refer to *1
Level of Drive	10 μW (Max. 200 μW)
Load Capacitance	8pF
Specifications Number	STD-CRG-2

Dimensions

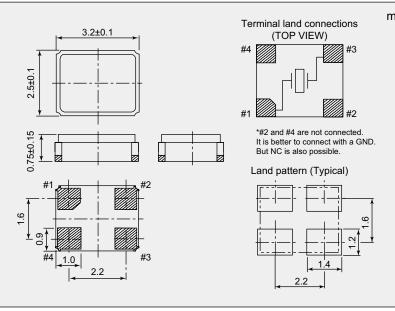

Please specify the model name, frequency, and specification number when you order products. For further questions regarding specifications, please feel free to contact us.

		- .	
*1	Equivalent	Series	Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]		
9.840 to 12	200		
12 to 13	100		
13 to 20	80		
20 to 50	50		



- 21 -



For OA / AV

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by Nihon Dempa Kogyo manufacturer:

Other Similar products are found below :

CS325S2400000ABJT 718-13.2-1 MC405 32.0000K-R3:PURE SN FC-135R 32.7680KF-A3 7A-40.000MAAE-T 7B-27.000MBBK-T FL2000085 9B-15.360MBBK-B 9C-7.680MBBK-T ASH7K-32.768KHZ AT-41.600MAGQ-T BTD1062E05A-513 LFXTAL066198Cutt 9C-14.31818MBBK-T FA-238 50.0000MB30X-K3 FC-12M 32.7680KA-AC3 SSPT7F-9PF20-R FX325BS-38.88EEM1201 LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7A-24.576MBBK-T 7B-30.000MBBK-T WX26-32.768K-6PF 9B-14.31818MBBK-B CD1AM 7B-25.000MAAE-T 7A-14.31818MBBK-T 6504-202-1501 6526-202-1501 FA-118T 27.1200MB50P-K0 FC-135R 32.7680KA-A3 ABM12-104-37.400MHZT ABLS-10.000MHZ-D3W-T BTJ112E01E-513 BTJ722K01C-7067 BTL-20-513 TSX-3225 24.0000MF15X-AC TSX-3225 16.0000MF18X-AC BTJ120E02C BTL-12-513 7A-10.000MBBK-T 7A-11.0592MBBK-T ABM12-103-24.000MHZT CS325S2500000ABJT ABM3B-25.000MHZ-B2-X-T FC-135 32.7680KA-A5 FX0800015